

# 2SB772S

## / Descriptions

TO-92          PNP


## / Features

$V_{CE(sat)}$  ,           $h_{FE}$

## / Applications

3 , ,

/ Equiva T<sub>634cup</sub>//3-4.0m)-t5.7( )T<sub>ET077</sub> 02 05 rg57434 68.0404 18ref62434 68.16 46



## / hFE Classifications & Marking



**/ Absolute Maximum Ratings(Ta=25 )**

			°C
		~	°C

**/ Electrical Characteristics(Ta=25 )**

						μ
						μ


/ Electrical Characteristic Curve

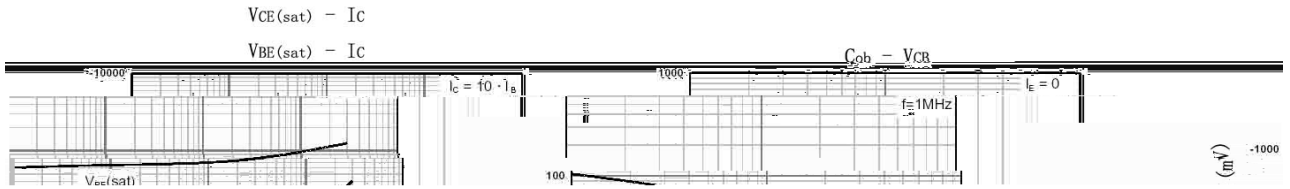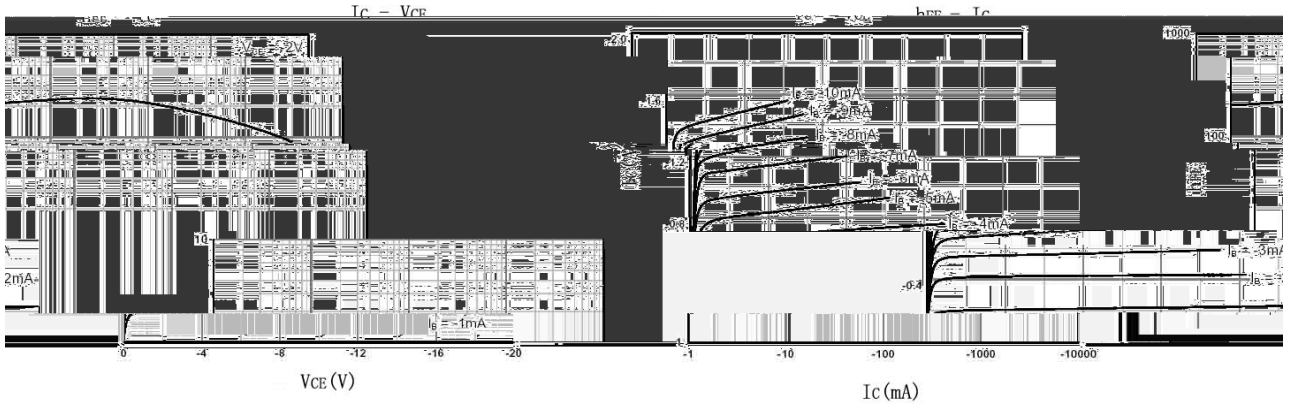


/ Package Dimensions

TO-92

Unit: mm

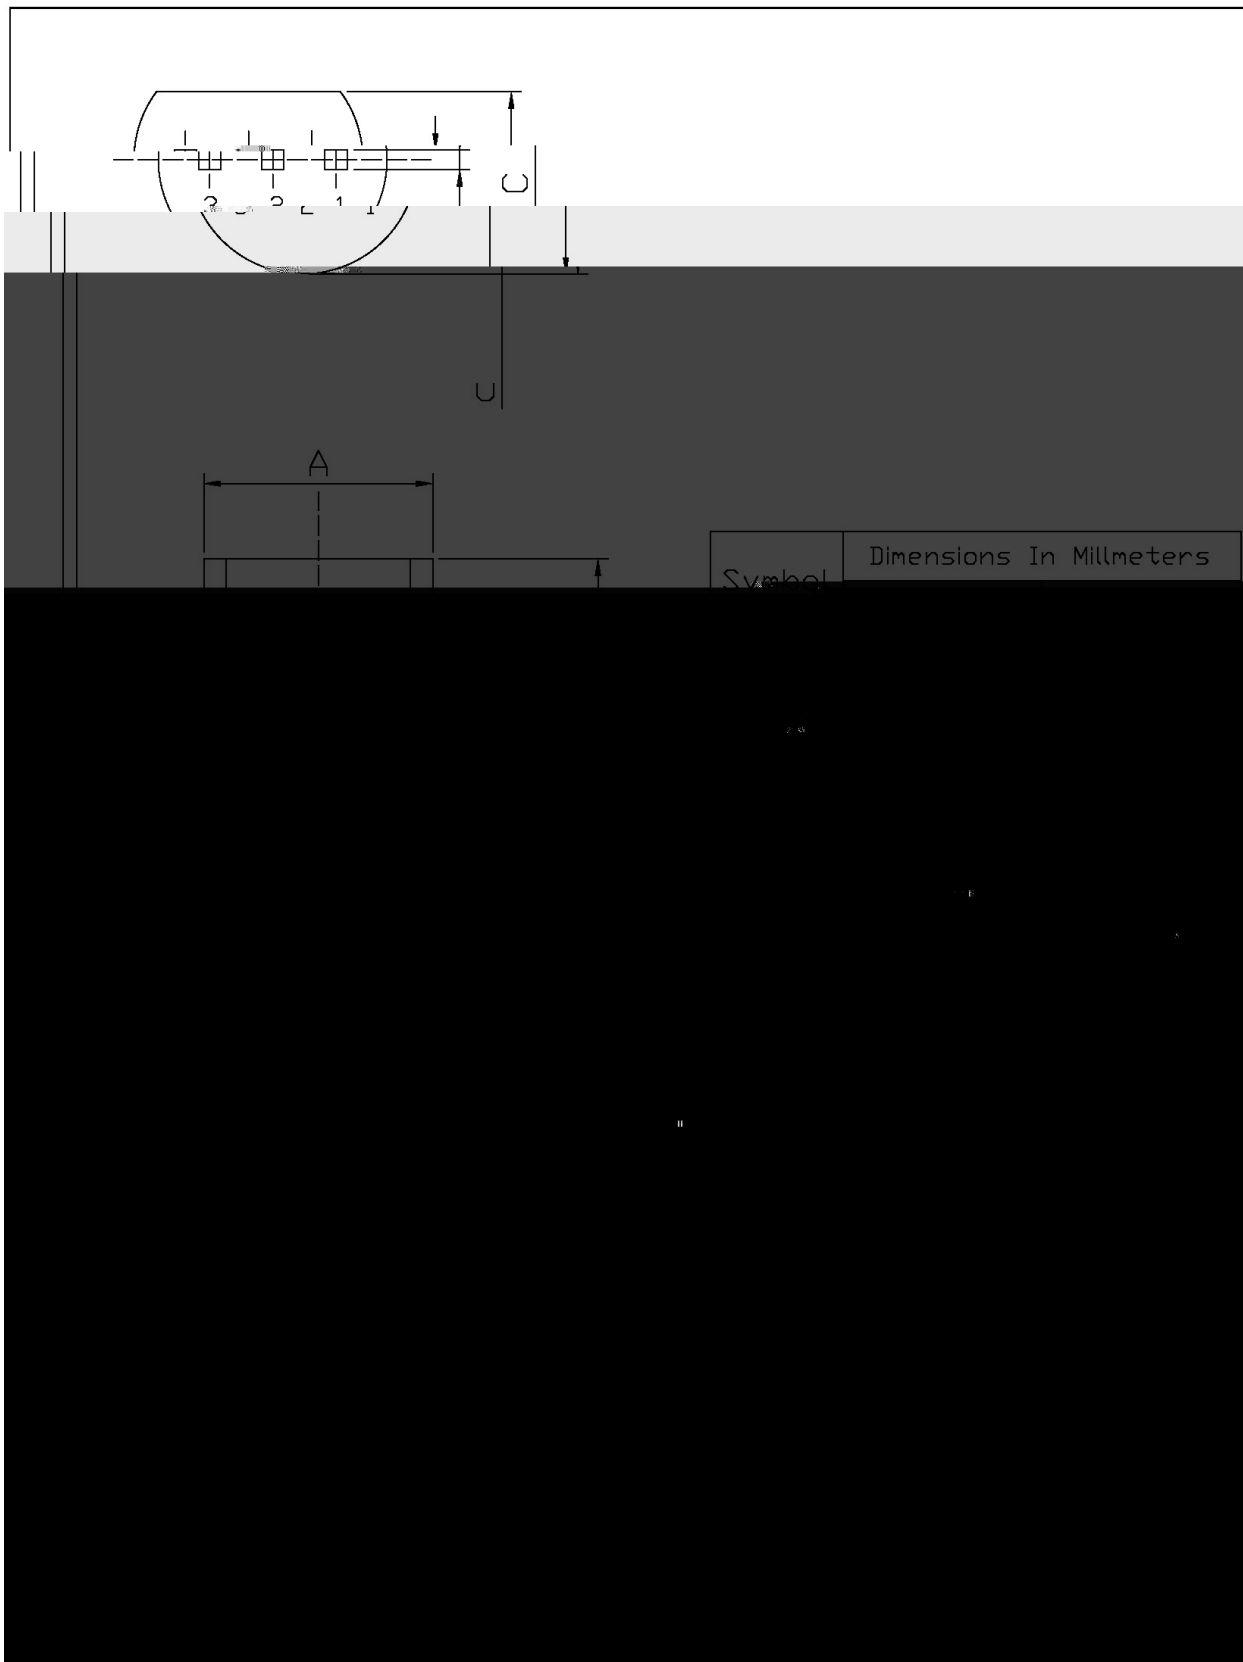


/ Marking Instructions

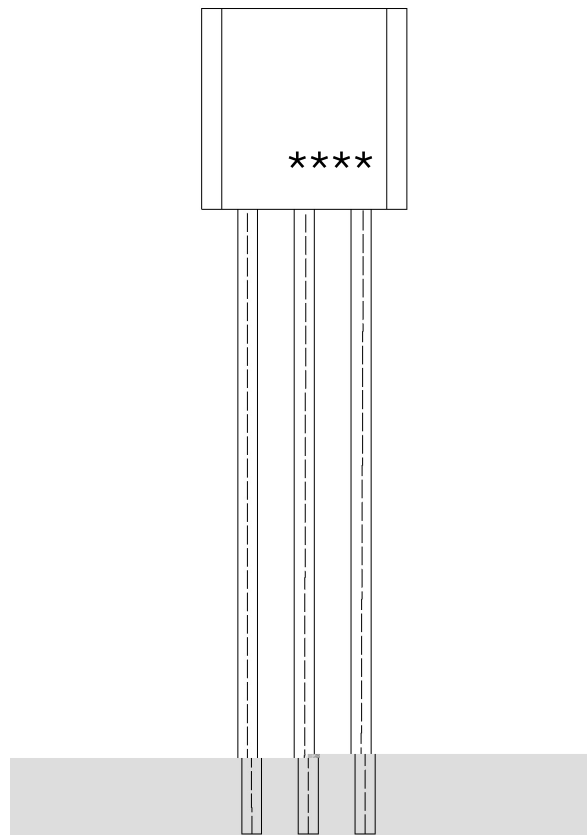

BR:  
B772S  
R:  
\*\*\*\*

( ) / Temperature Profile for Dip Soldering(Pb-Free)

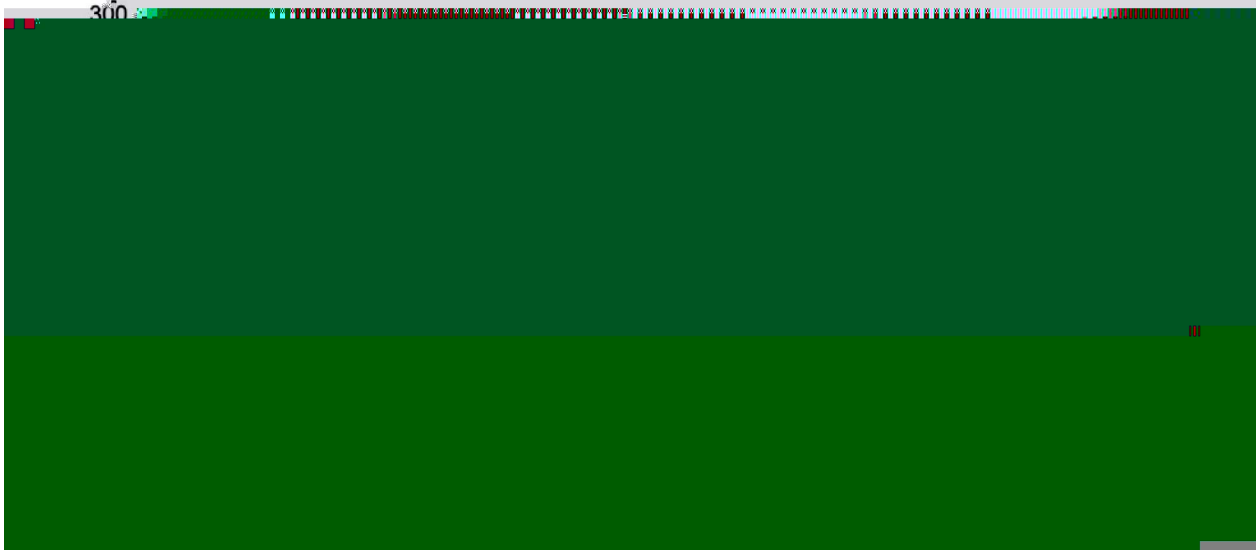

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268

/ Notices