


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit











/ Pinning




/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

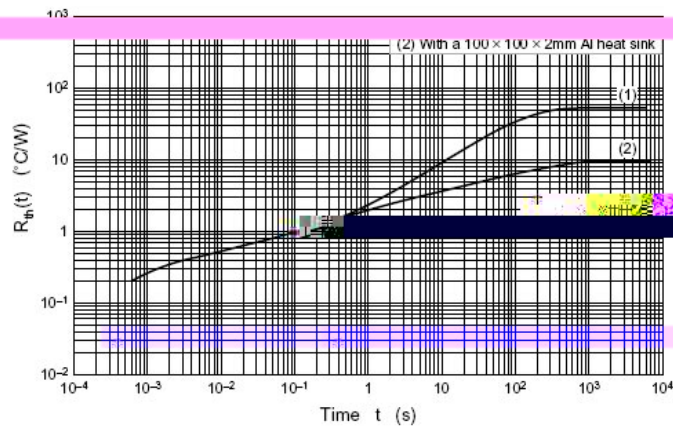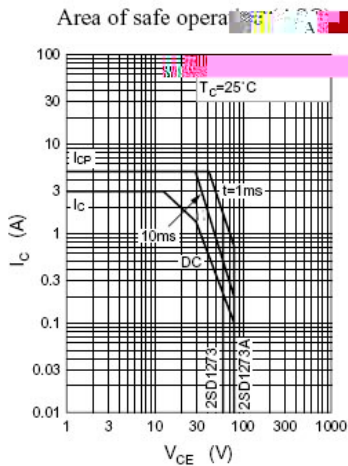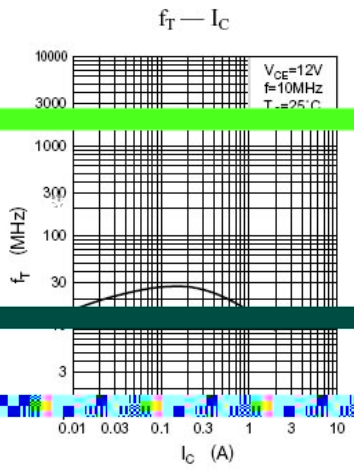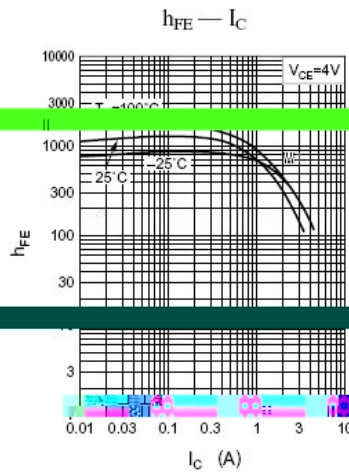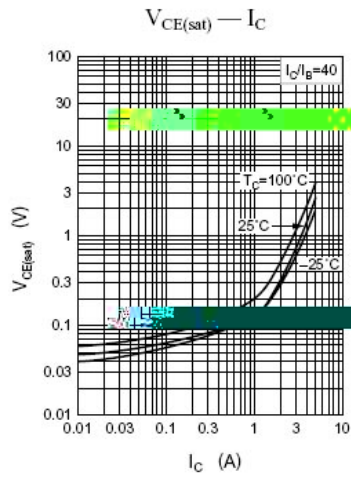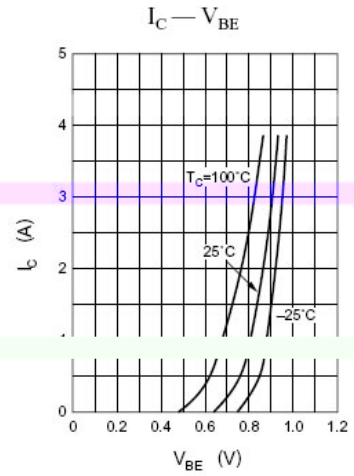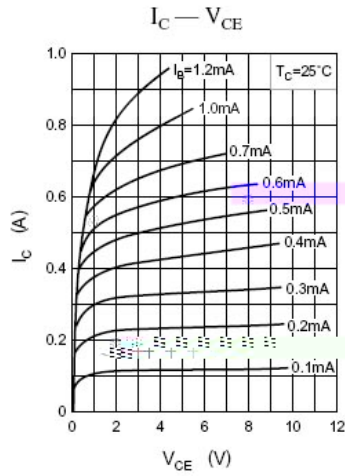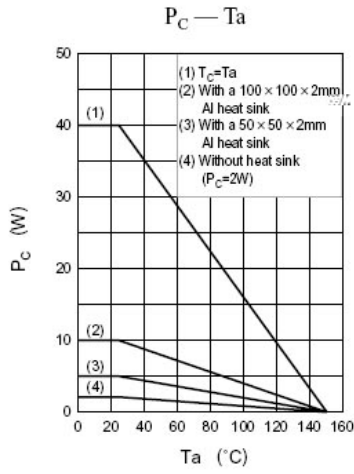


/ Package Dimensions

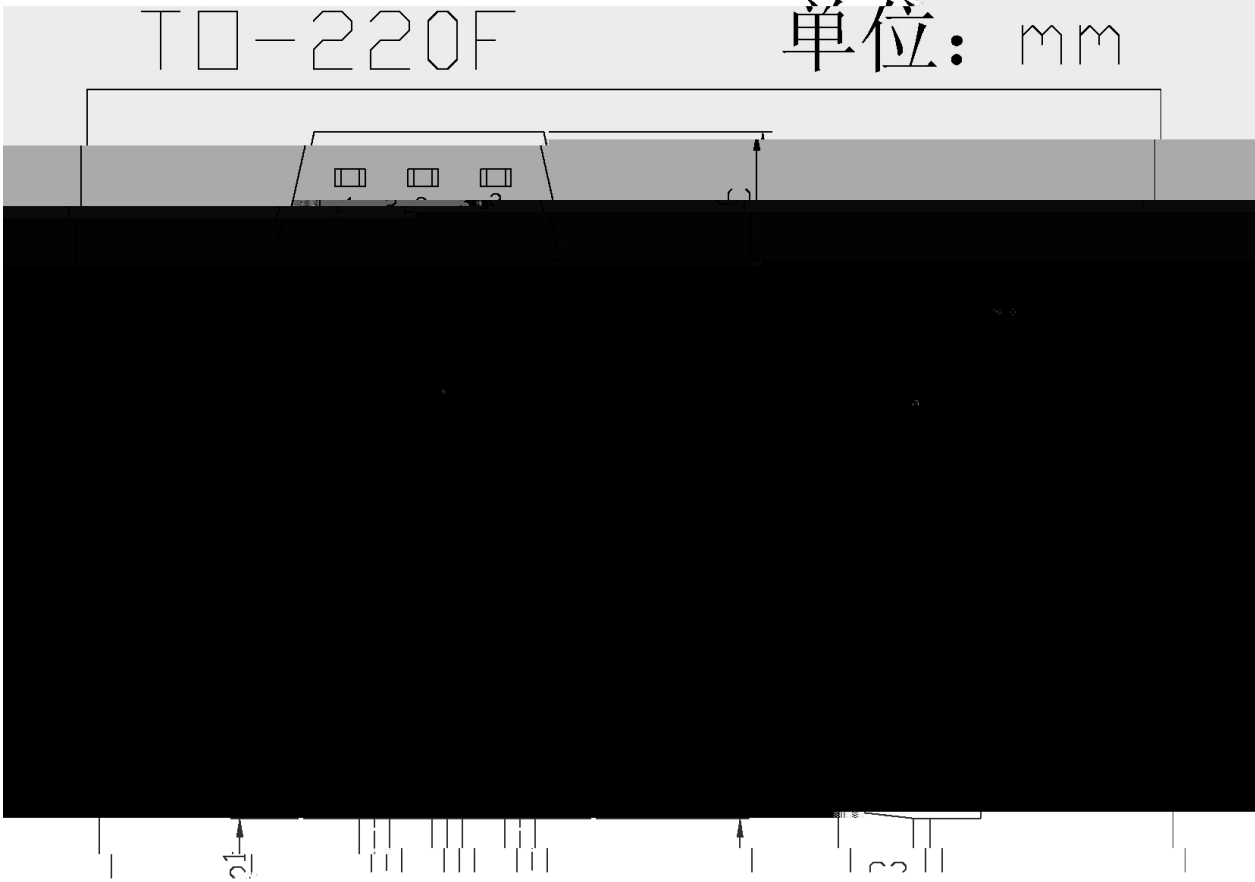


dimensions in millimeters			dimensions in millimeters		
Symbol	Min	Max	Symbol	Min	Max
C	4.3	4.7	b1	2.9	3.9
A	9.7	10.3	a	0.55	0.75
B	14.7	15.3	E	2.29	2.79
B1	3.8	4.0	E1	2.29	2.79
B2	2.9	3.1	C1	2.5	2.9
R	3.0	3.4	C2	2.5	2.7
b	12.5	13.5	c	0.5	0.7

/ Marking Instructions

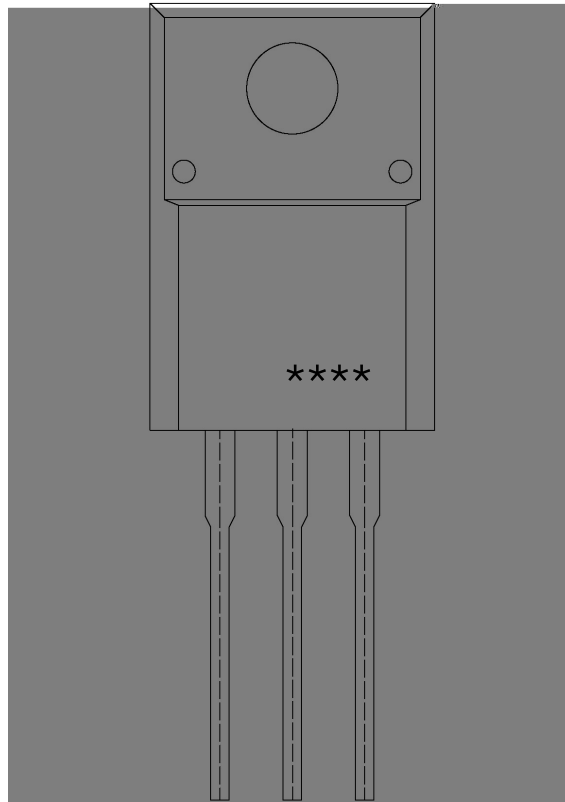

() / Temperature Profile for Dip Soldering(Pb-Free)

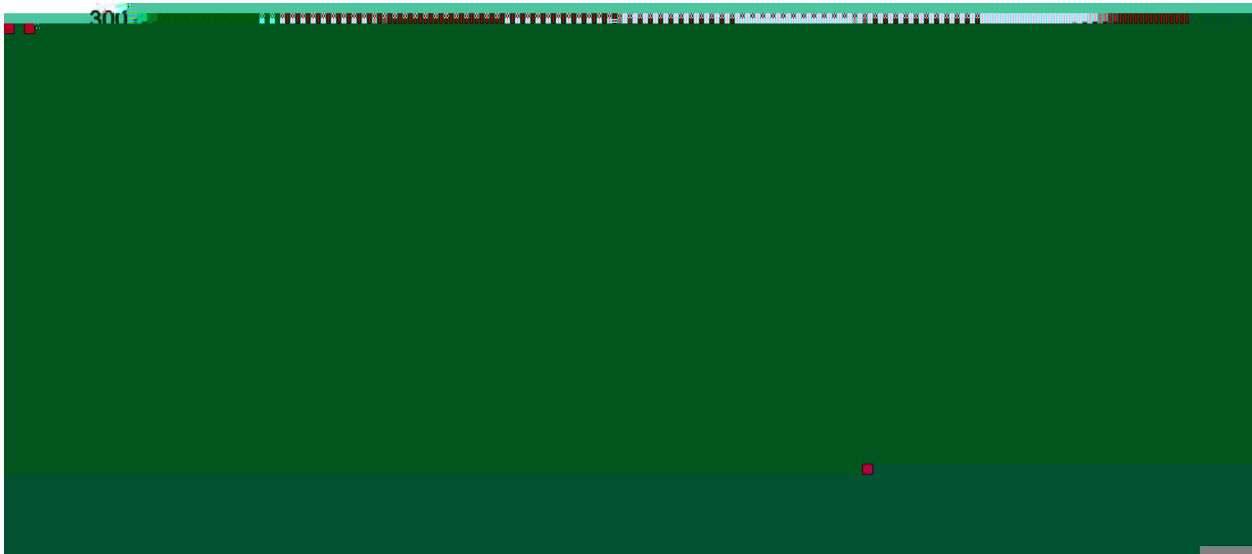

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /
--	----------------	---------------------	----------------------