

78D08


/ Descriptions




/ Features




/ Applications



/ Equivalent Circuit or Application Circuit

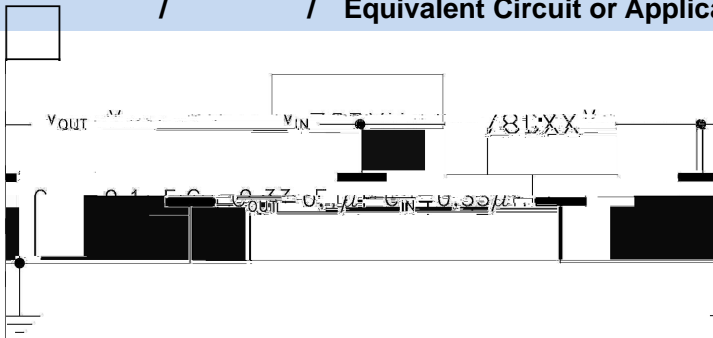

/ Pinning

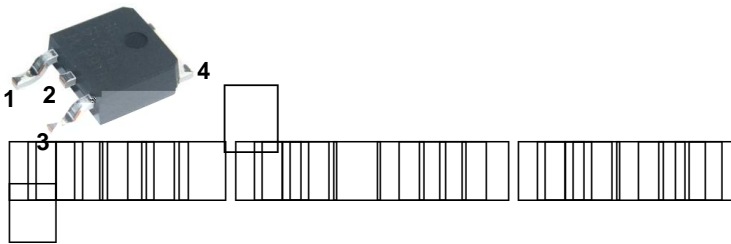

/ Marking





78D08









蓝箭电子
BLUE ROCKET ELECTRONICS


DATA SHEET

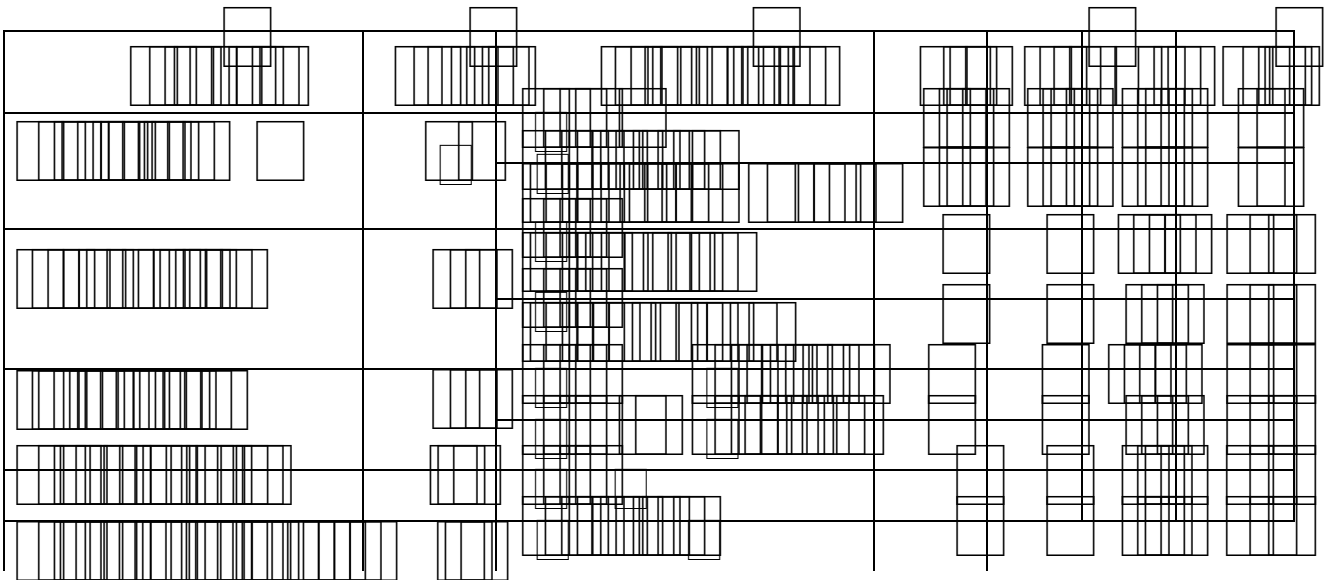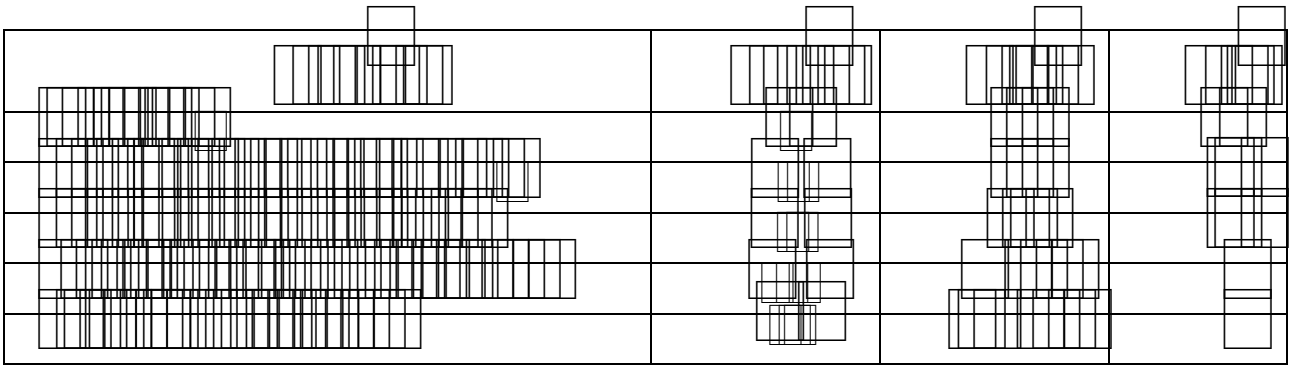

/ Electrical Characteristic Curve

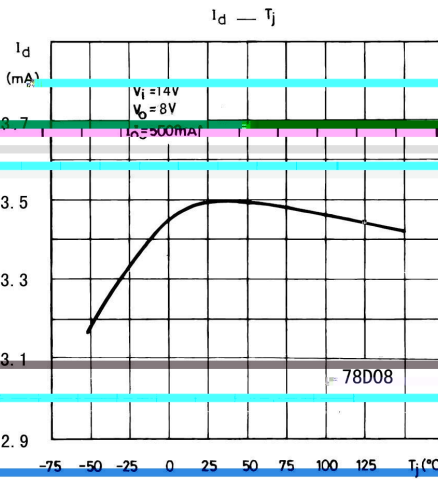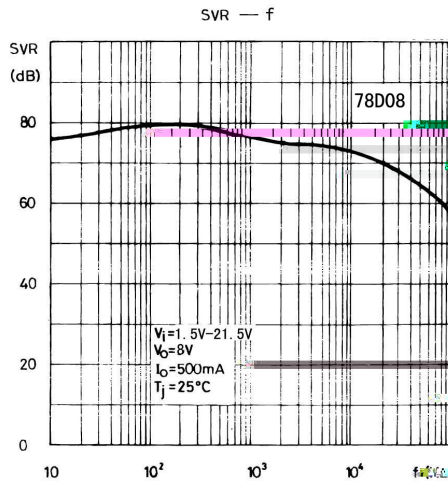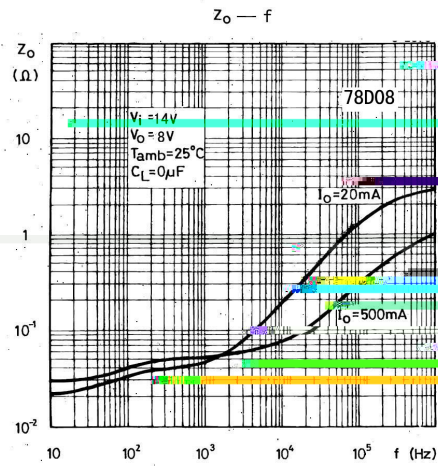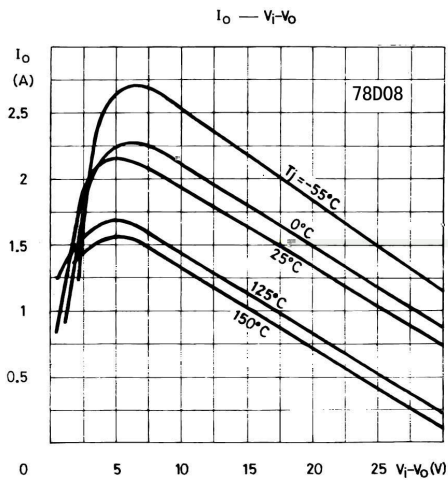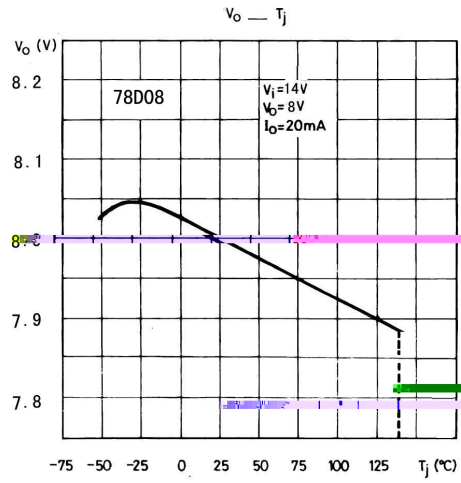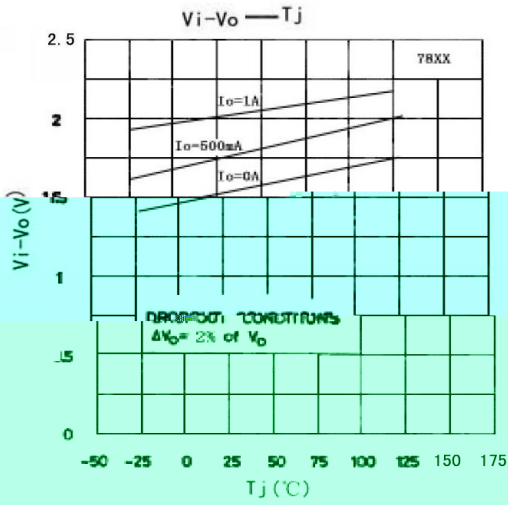

/ Package Dimensions

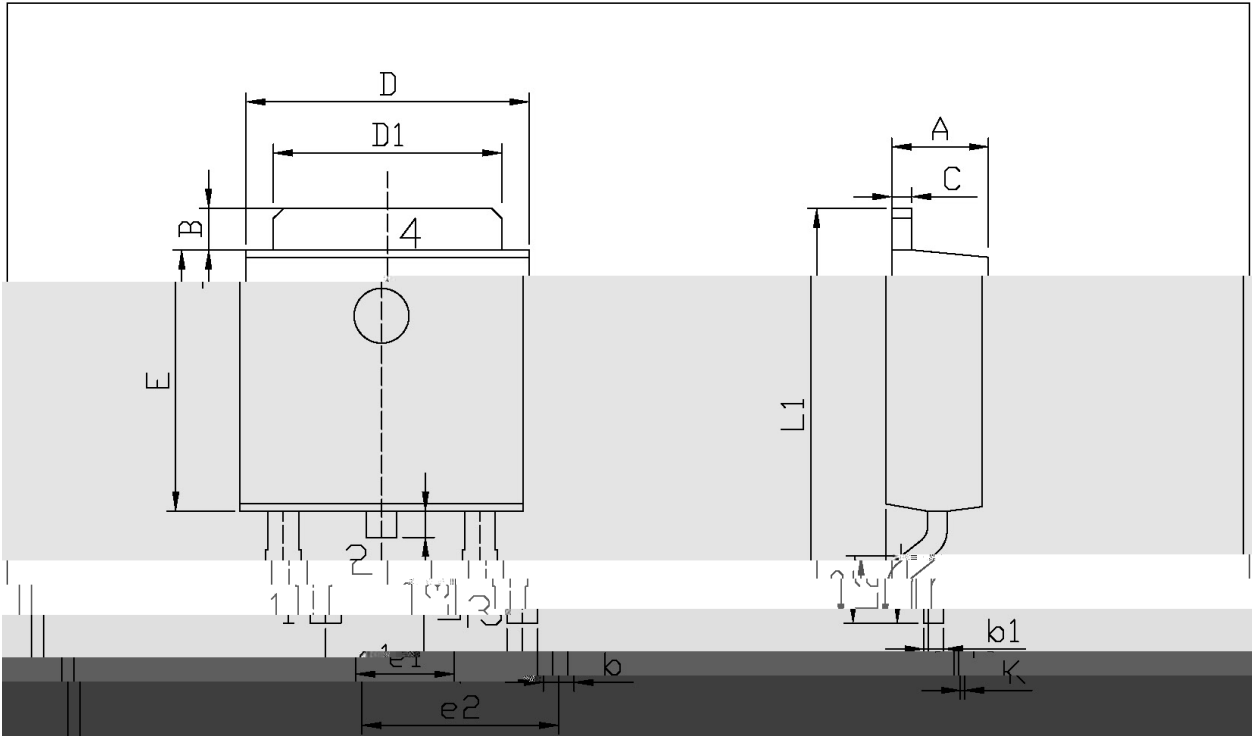

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.70	e2	4.43	4.73
b1	0.45	0.55	L1	0.45	0.55
∅	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

TO-252

78D08





蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET




/ Marking Instructions

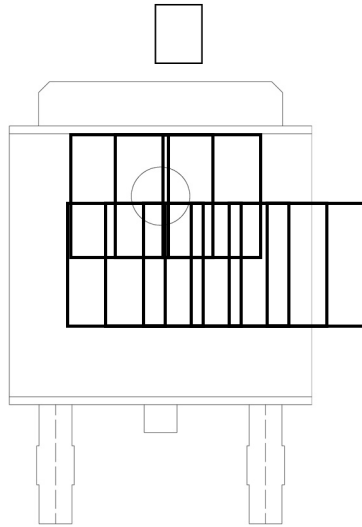



BR


78D08

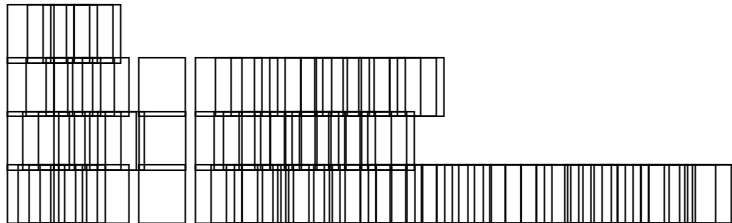

() /

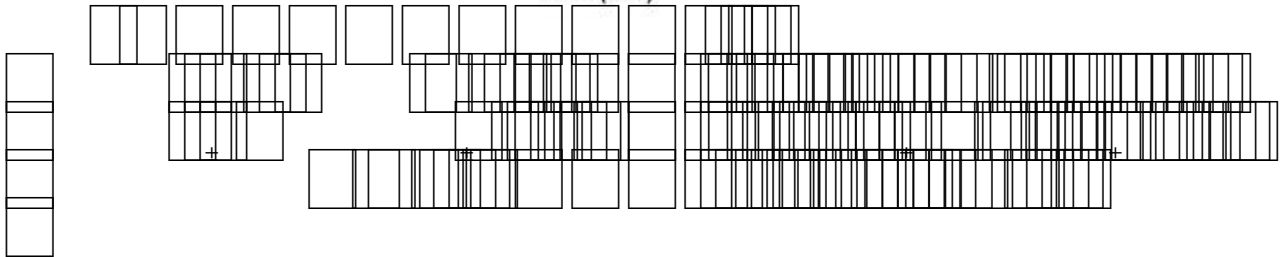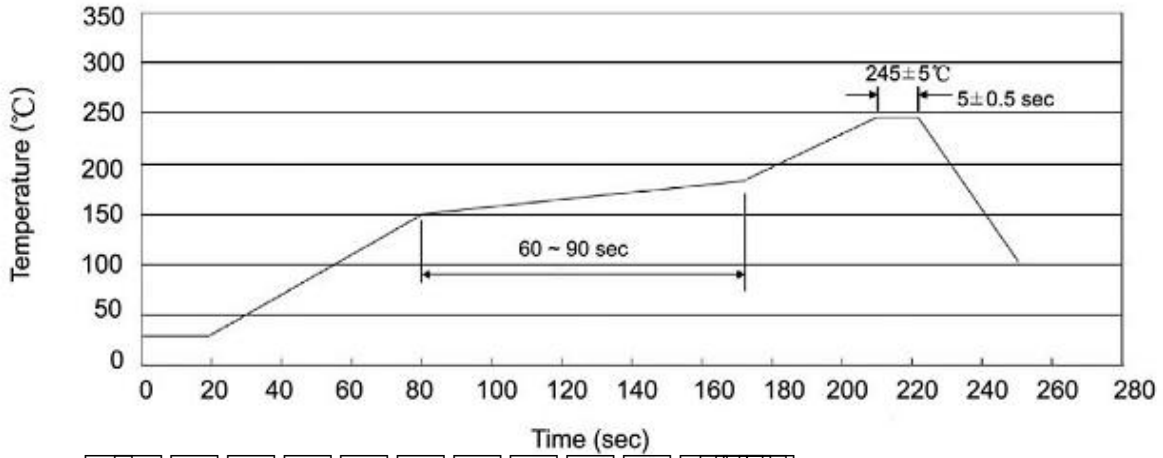

/ Resistance to Soldering Heat Test Conditions

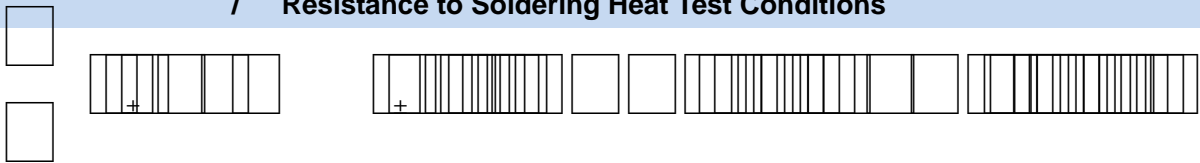

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
只卷盘	卷盘盒	只盒	盒箱	只箱		盒	箱	
只套管	套管盒	只盒	盒箱	只箱		套管	盒	箱

/ Notices

