

/ Descriptions


SOT-323 PNP

/ Features


P_C , h_{FE} , , 9014W

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

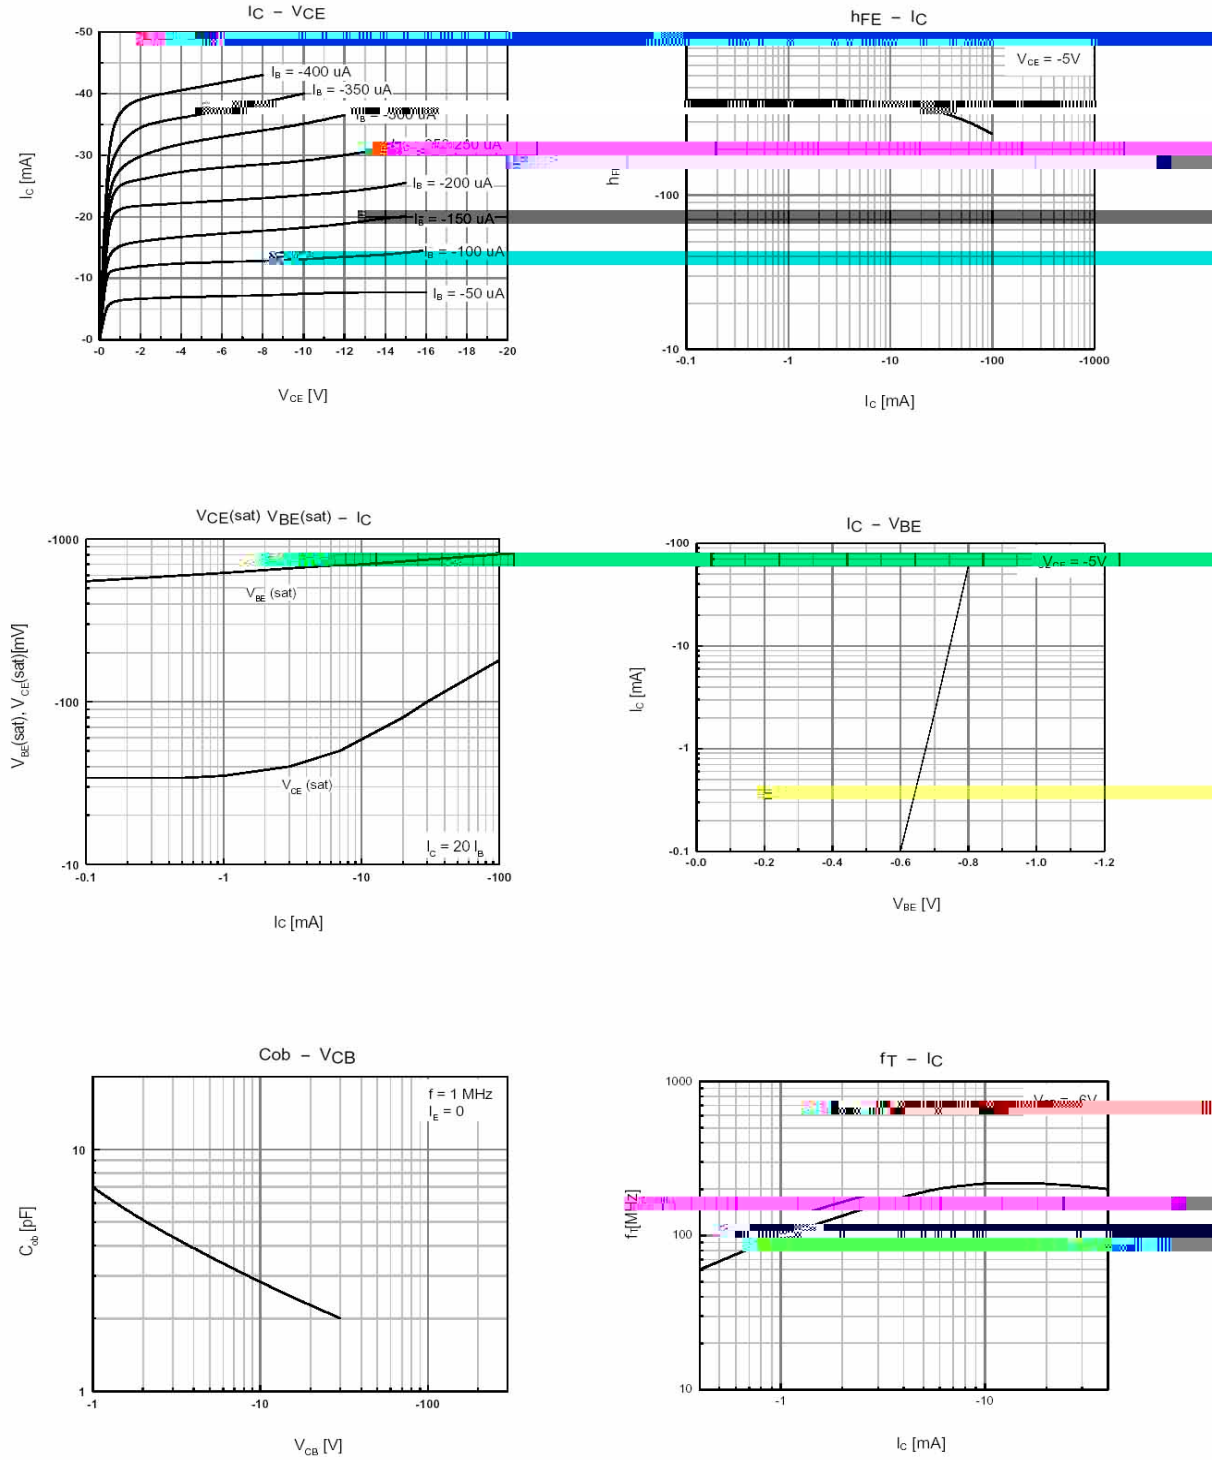

/ Package Dimensions

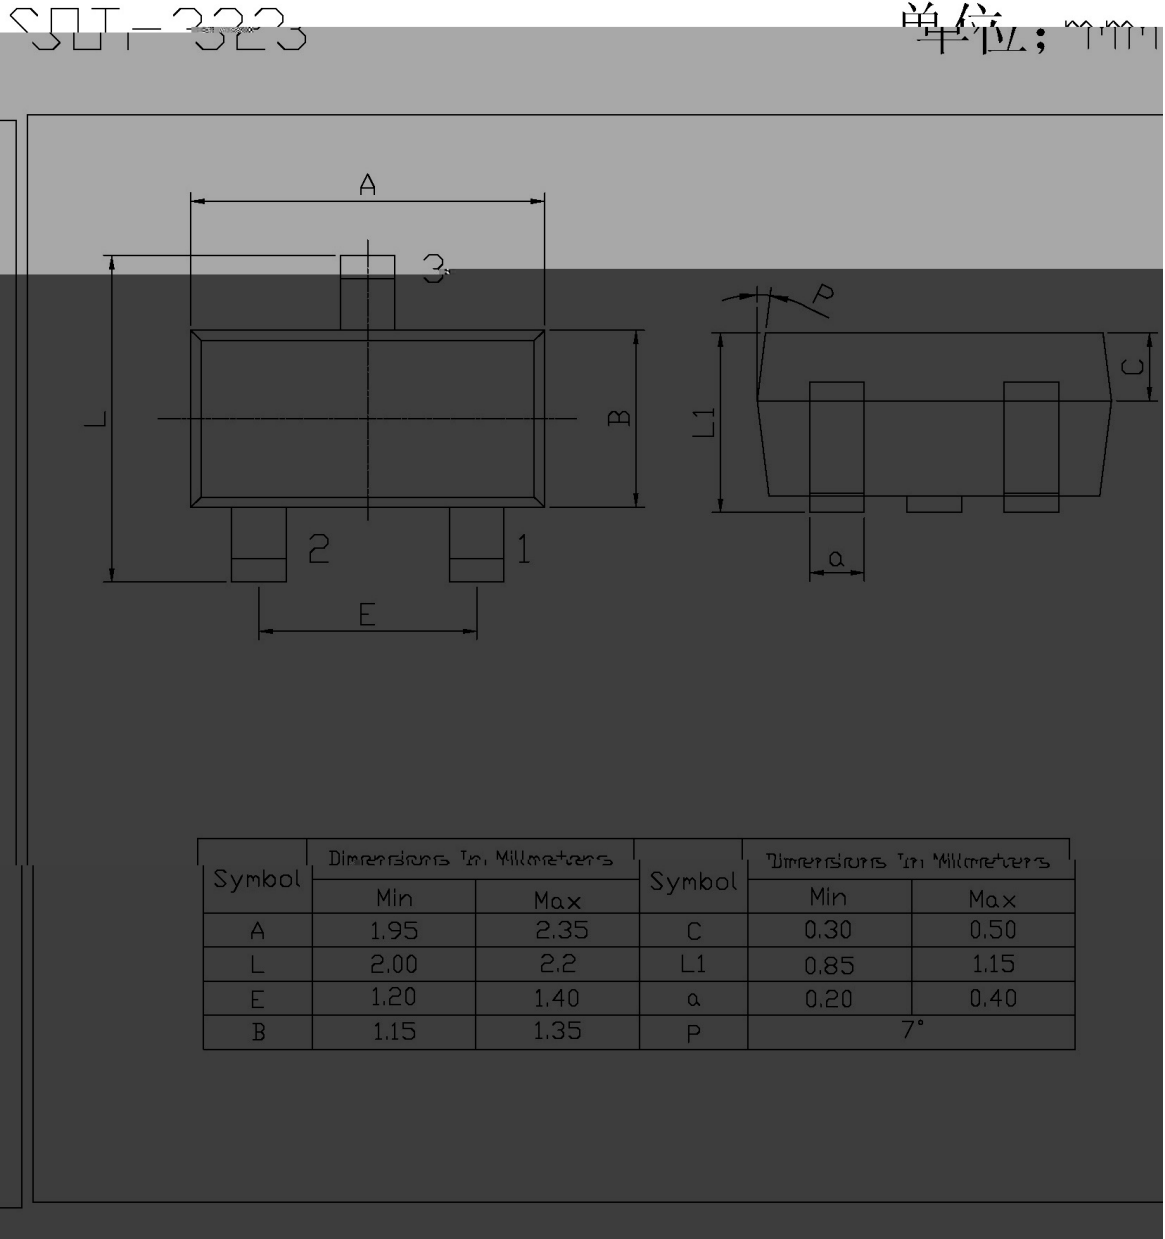

/ Marking Instructions

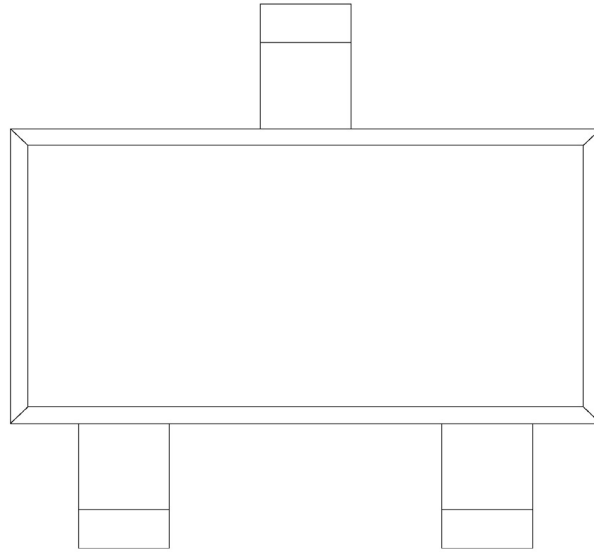


H

M6

A

h_{FE}

() / K\d g\iXk i\`Gif]`Δ`]fi`@`I`\]fn`Jfd\`i`e^ZGY\$=i\`ž

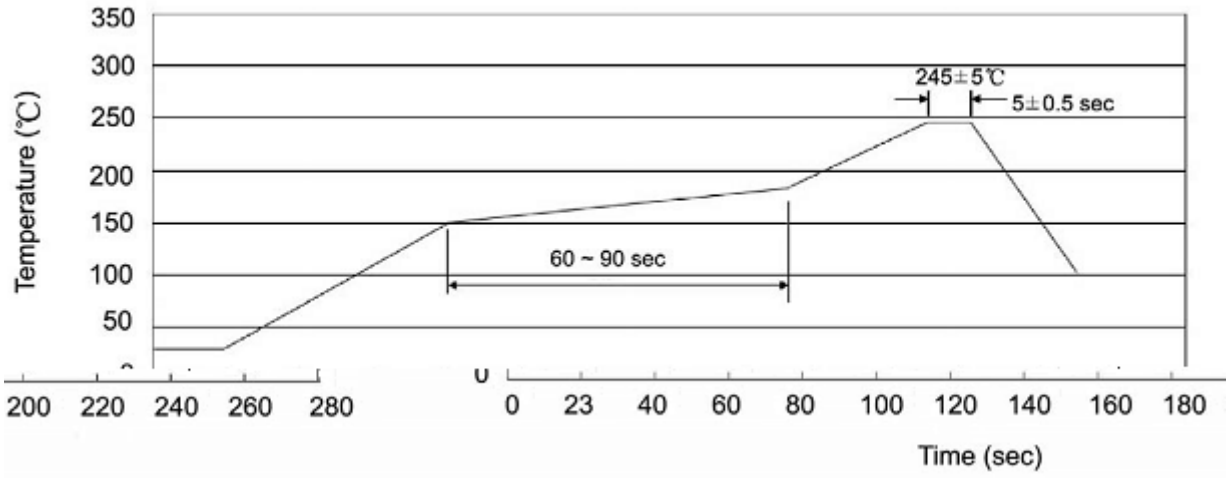

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	

/ Notices