





/ Electrical Characteristic Curve

Fig.1 Power Derating Curve

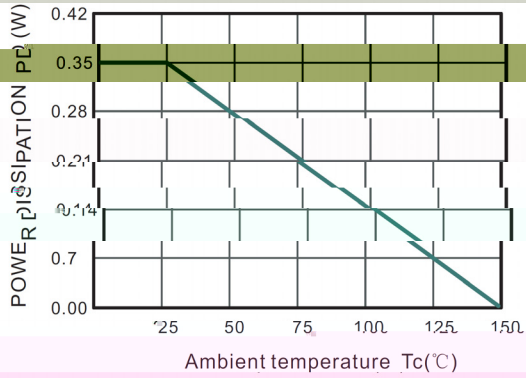


Fig.2 Typical Reverse Characteristics

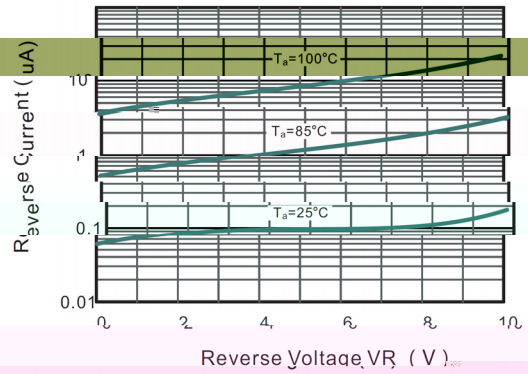


Fig.3 Typical Junction Capacitance

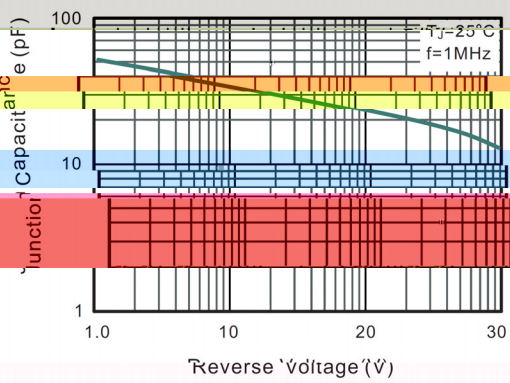


Fig.4 Typical Forward Characteristic



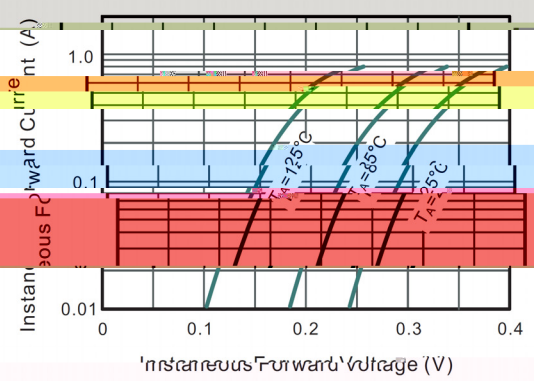


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

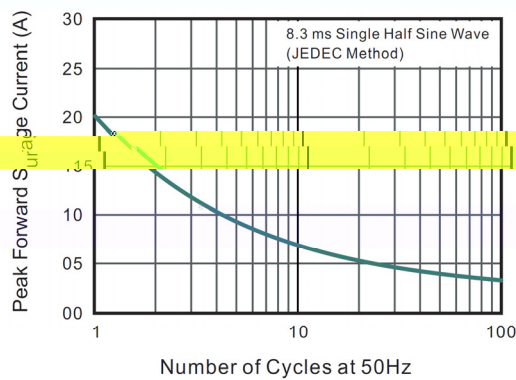

/ Package Dimensions

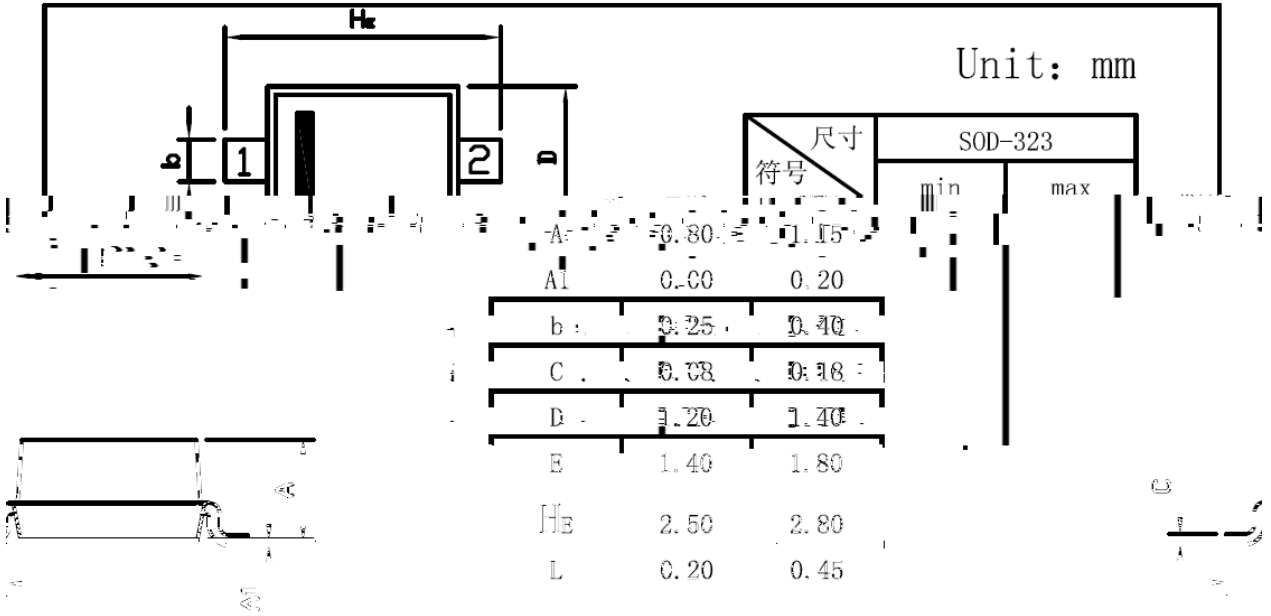


ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. PIN: 1, 2

SOD-323

**BAT60B**

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

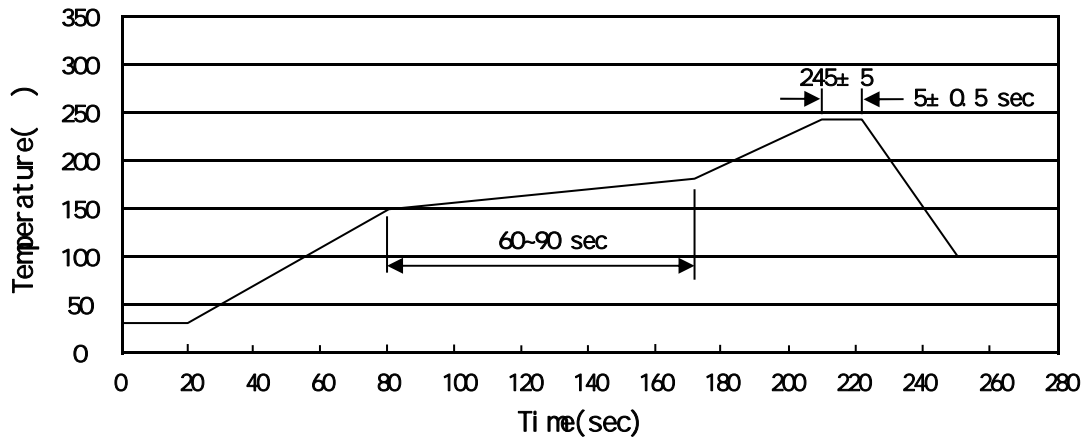

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/	"		

/ Notices