

BR2SC1815WQ

Rev.A Nov.-2023

/ Descriptions

SOT-323 NPN

Silicon NPN transistor in a SOT-323 Plastic Package.

/ Features


h_{FE} AEC-Q101

High voltage and high current, excellent h_{FE} linearity ,low noise, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


/ Applications

Audio frequency general purpose, driver stage amplifier applications, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit



/ Pinning

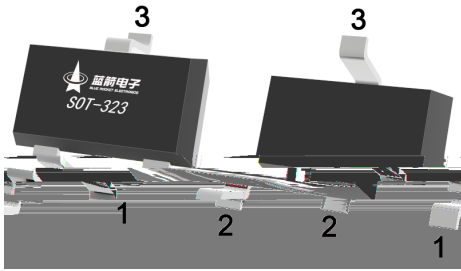

PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	O	Y	GR	BL
h_{FE} Range	70 140	120 240	200 400	350 700
Marking	QHFO	QHFY	QHFG	QHFB


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current	I_C	150	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=60V$ $I_E=0$			0.1	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=5.0V$ $I_C=0$			0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=6.0V$ $I_C=2.0mA$	70		700	
	$h_{FE(2)}$	$V_{CE}=6.0V$ $I_C=150mA$	25	100		
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA$ $I_B=10mA$		0.1	0.25	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=100mA$ $I_B=10mA$			1.0	V
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=1.0mA$	80			MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V$ $I_E=0$ $f=1.0MHz$		2.0	3.5	pF
Base Intrinsic Resistance	$r_{bb'}$	$V_{CB}=10V$ $I_C=1.0mA$ $f=30MHz$		50		
Noise Figure	NF	$V_{CE}=6.0V$ $I_C=0.1mA$ $R_g=10K$ $f=1.0KHz$		1.0	10	dB


/ Electrical Characteristic Curve

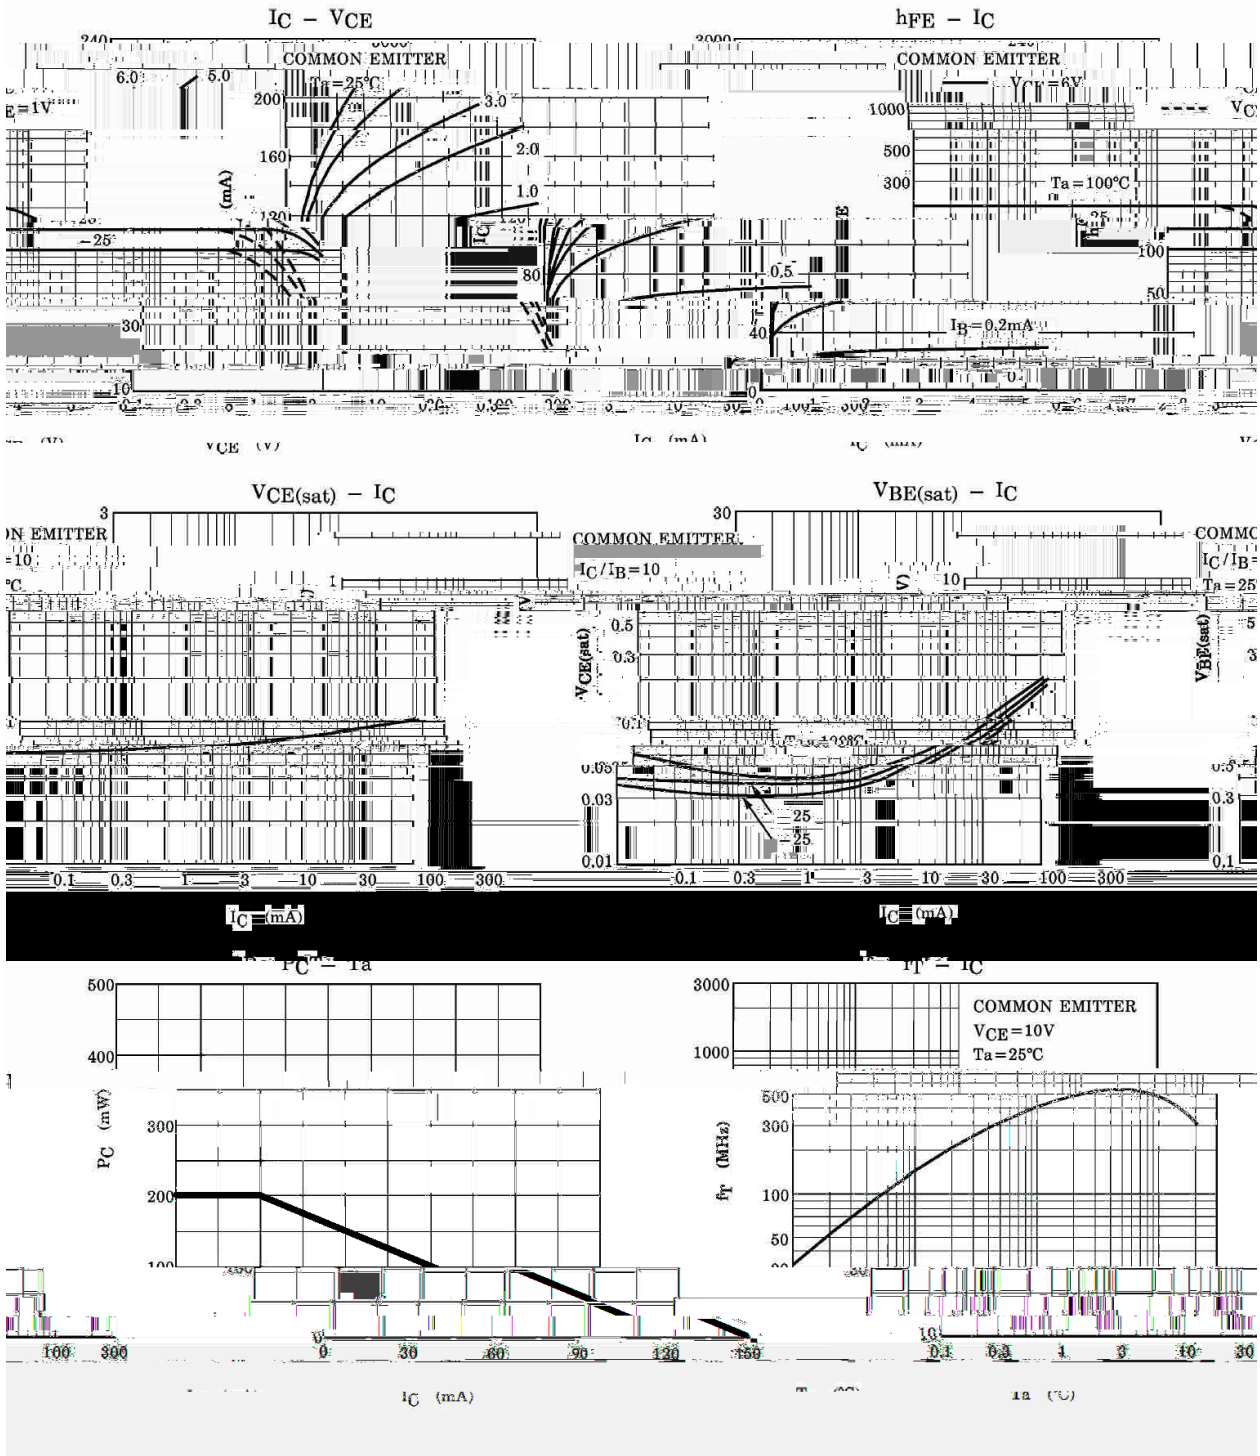


/ Package Dimensions

SOT-323

单位: mm

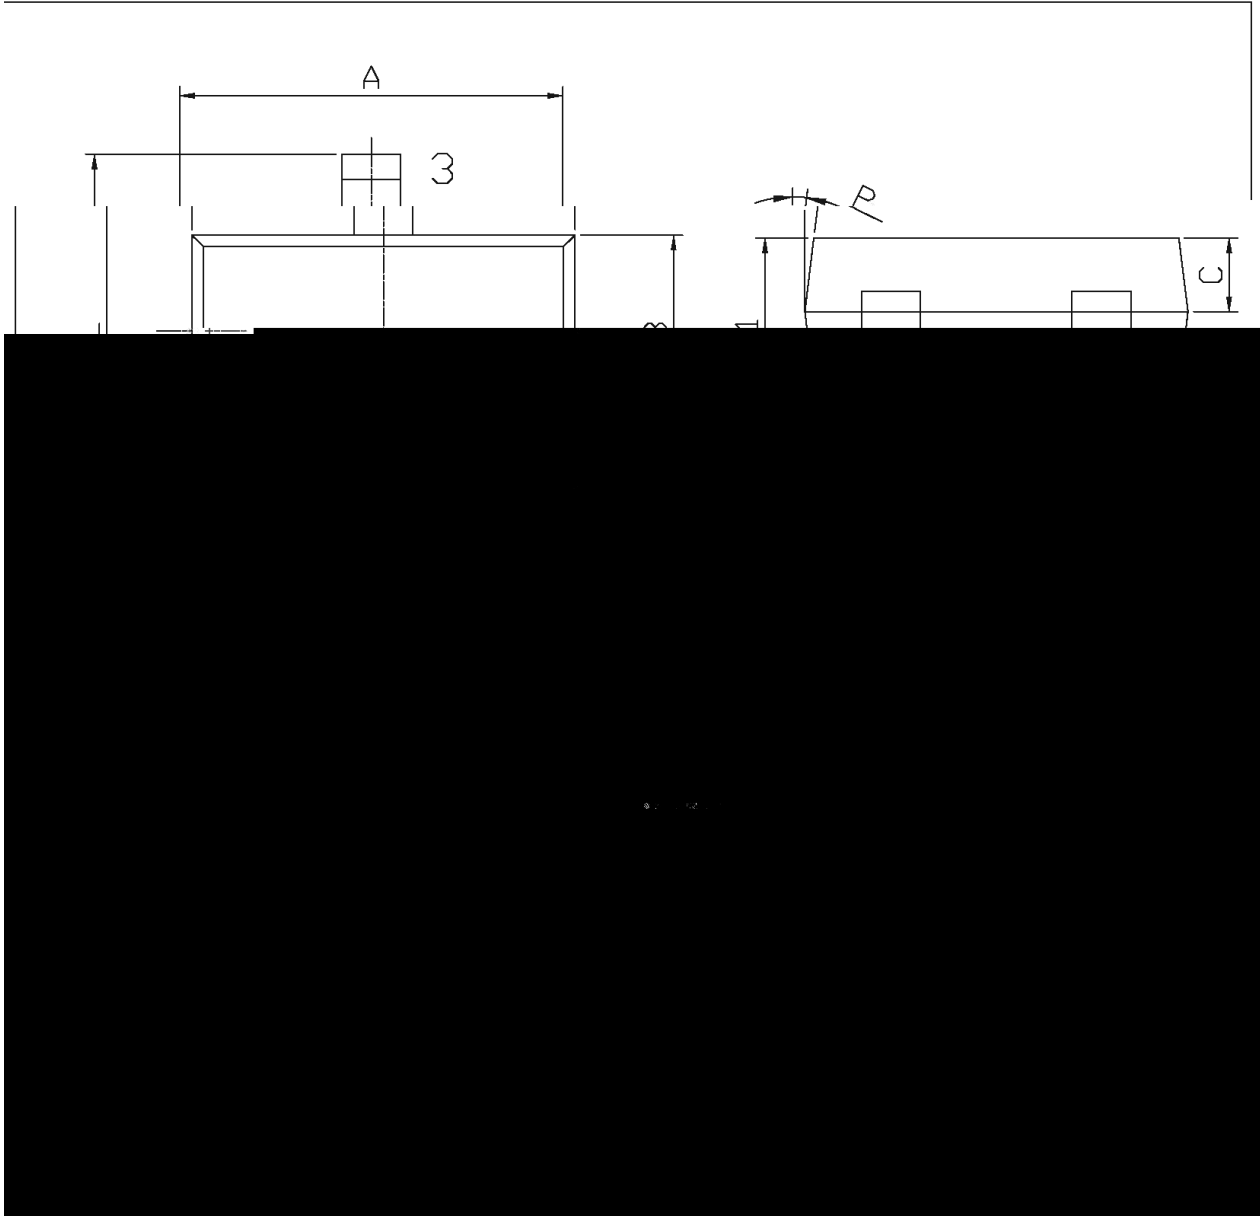

/ Marking Instructions

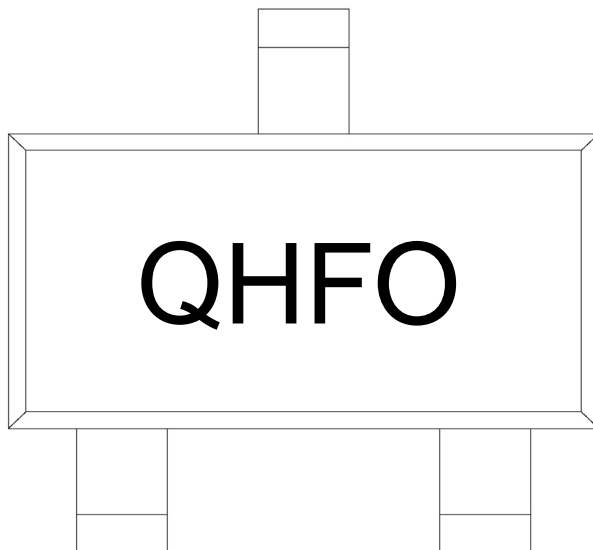

Q

HF

O: h_{FE}


Note:

Q: Automobile halogen-free product Code

HF: Product Type Code

O: h_{FE} Classifications Symbol Code

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

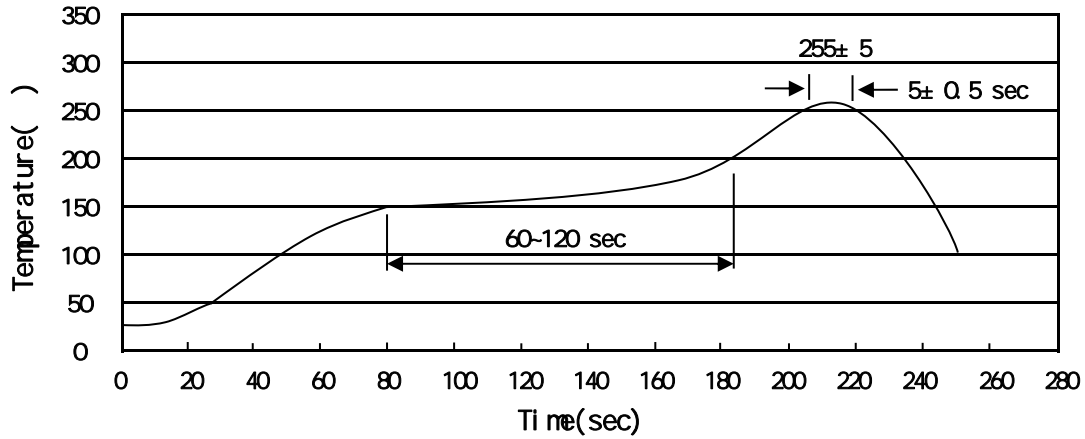

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 x8	180x120x180	390x385x205

/ Notices