


/ Descriptions

/ Features

/ Applications

DC/DC

/ Equivalent Circuit









/ Pinning





/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

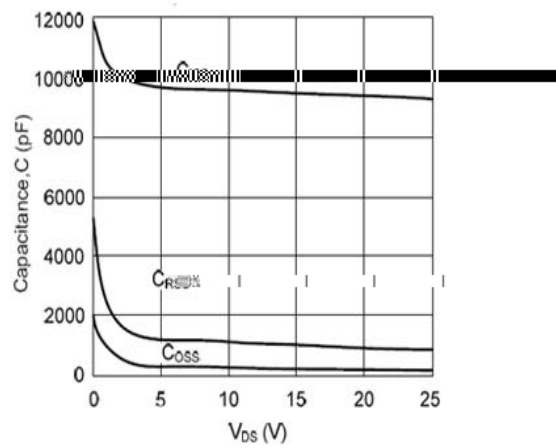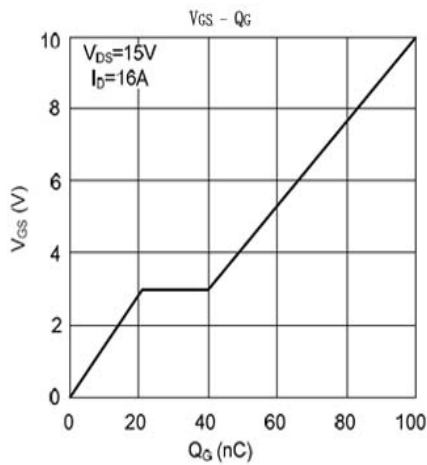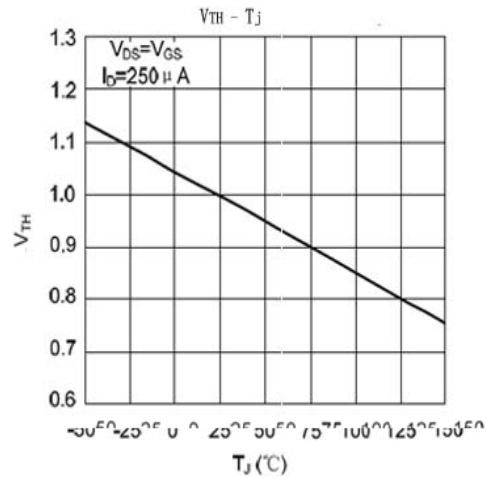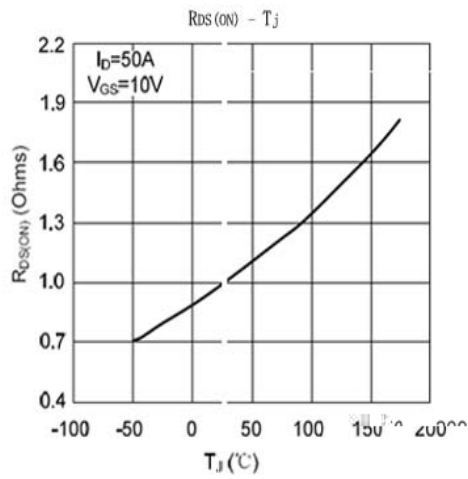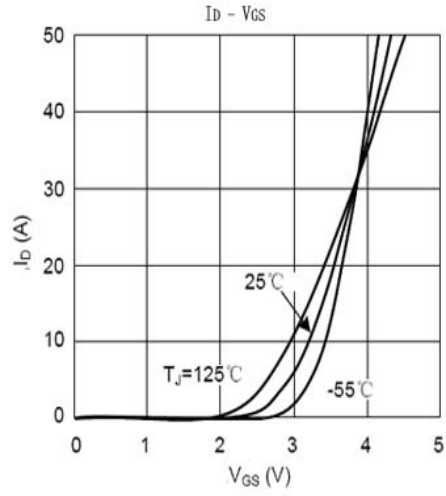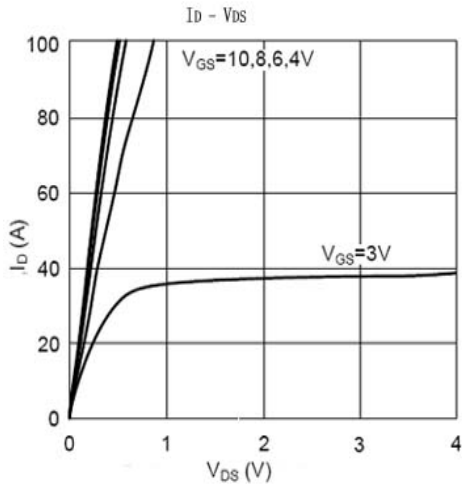

/ Package Dimensions

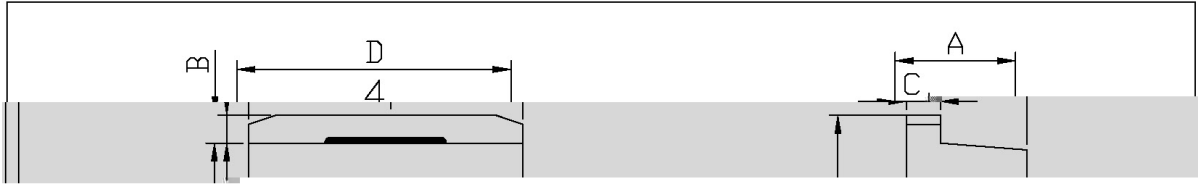


单位: mm

Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.24	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.40	0.60	L2	2.24	2.74
C	1.20	1.40	L3	1.20	1.60
D	9.80	10.20			


TO-263

/ Marking Instructions

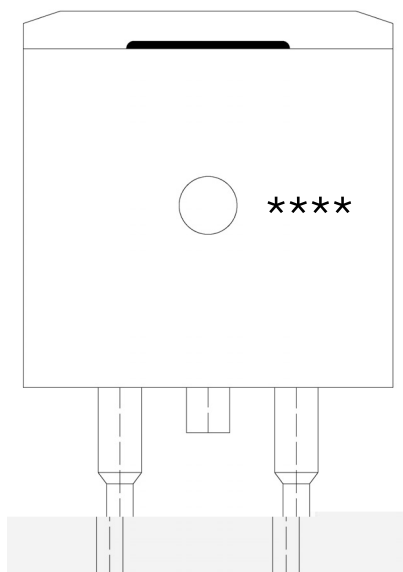

100N03

() / Temperature Profile for Dip Soldering(Pb-Free)

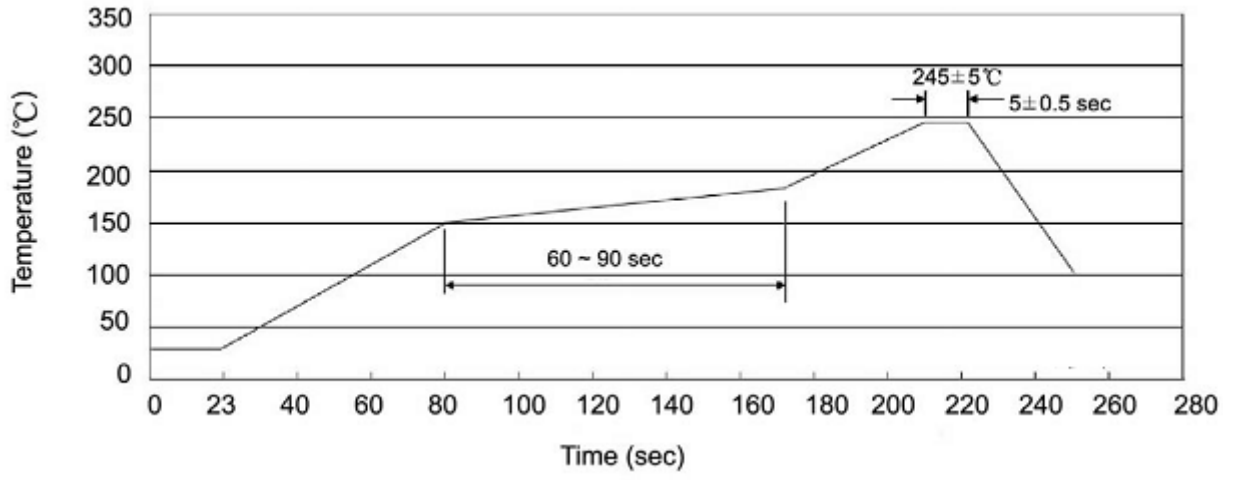

± ± ± ±

± 2