



/ Revised record


A	2022.1.13	ALL	AOS-AOD2144		




BRCS016N03DP



塑封封装 沟道场效应管。




BRCS016N03DP





DATA SHEET




/ Electrical Characteristics(Ta=25)



		Ω	Ω			











/ Electrical Characteristic Curve

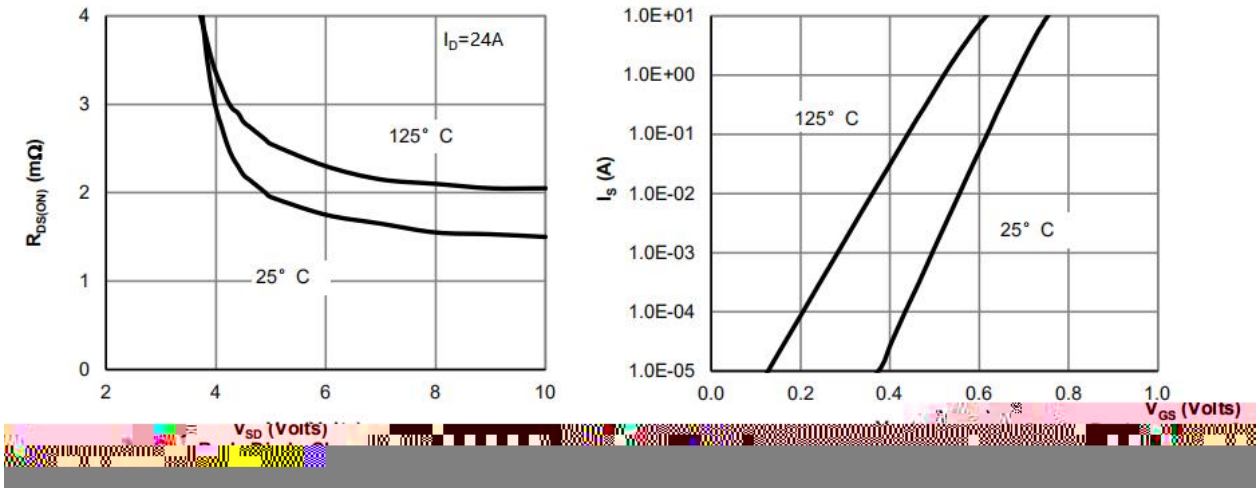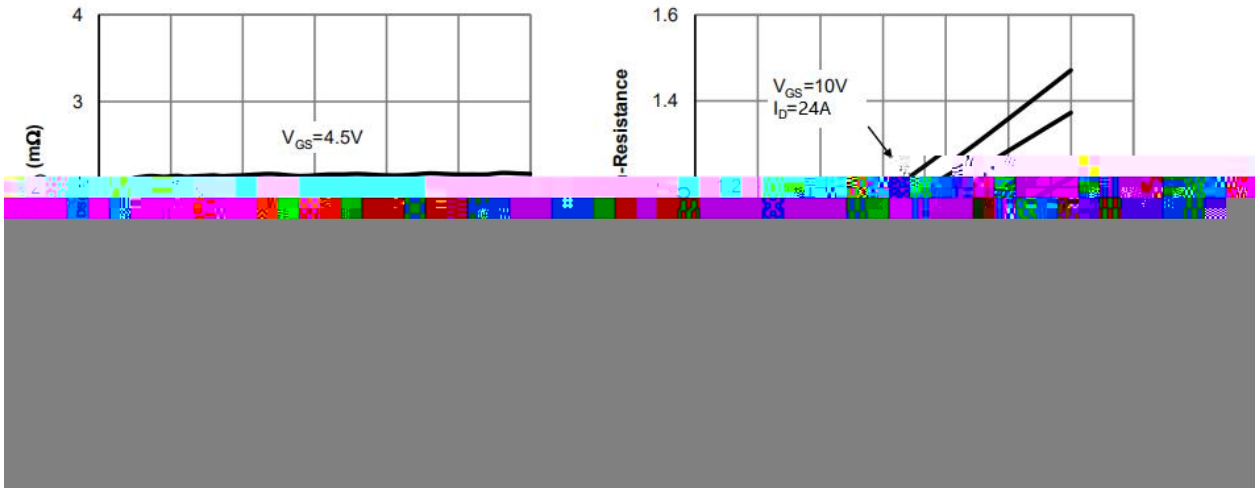




/ Electrical Characteristic Curve

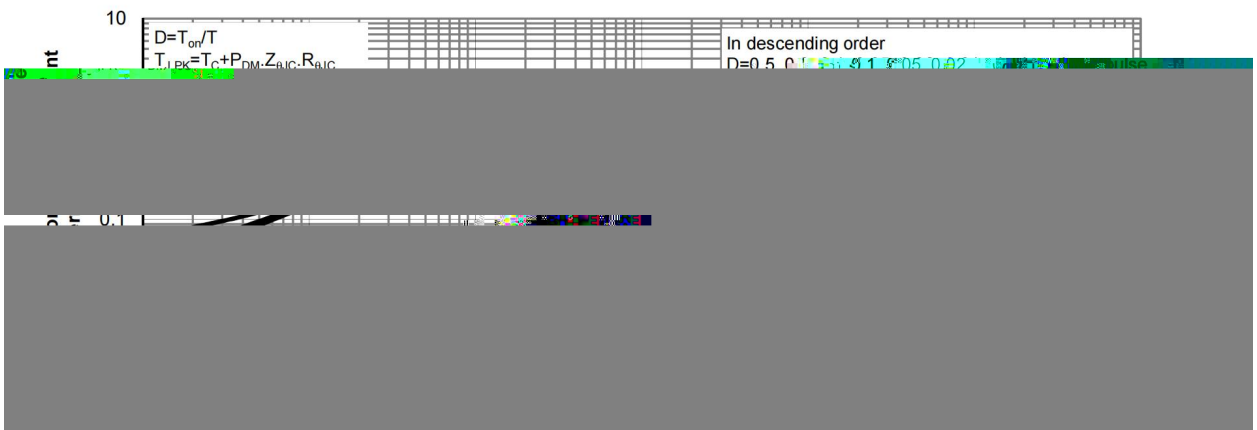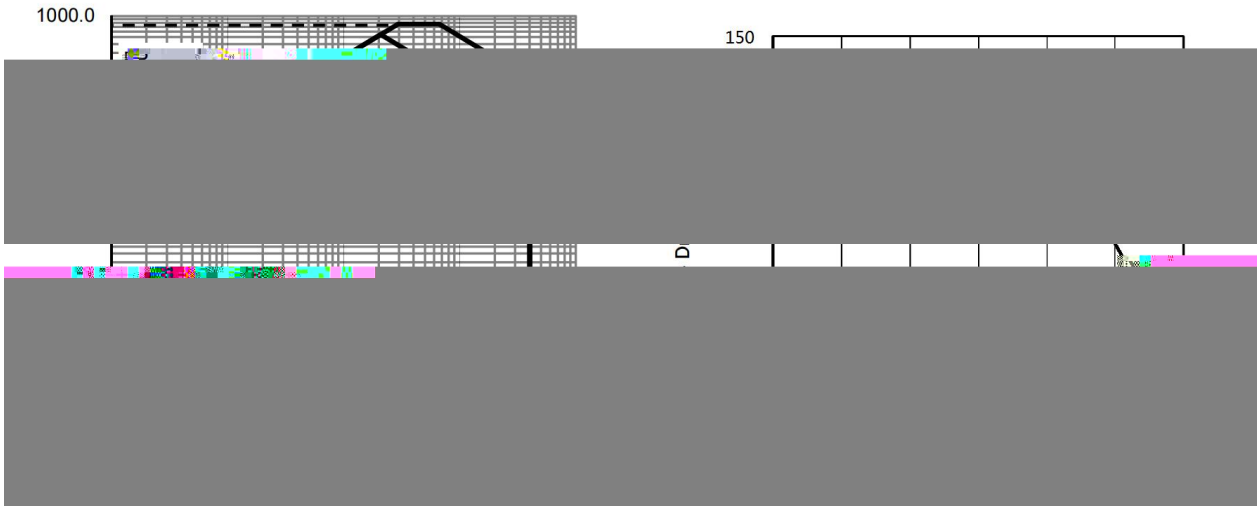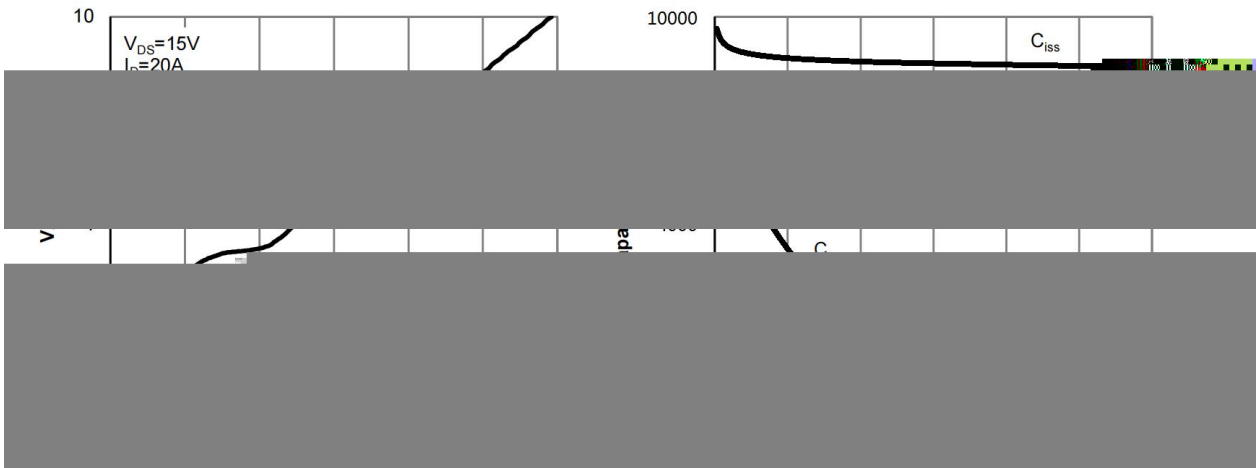




/ Package Dimensions

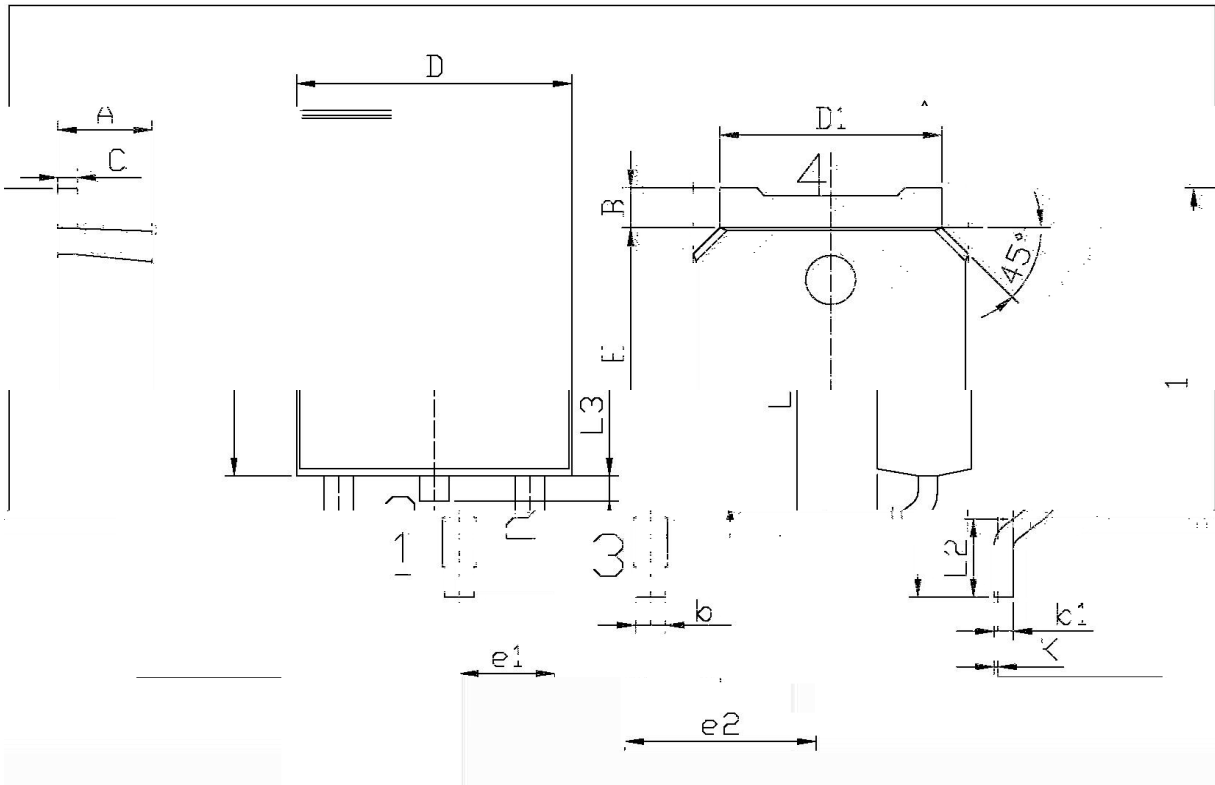


单位: mm


Symbol	Dimensions	Symbol	Dimensions
e1	2.24	A	2.20
e2	2.34	B	0.95
e3	2.00	C	0.45
e4	1.10	D	6.45
e5	0.55	L1	0.60
e6	9.85	L2	0.90
e7	10.35	L3	5.15
e8	0.70	L4	3.00
e9	0.70	L5	3.00
e10	0.45	L6	3.00



T0-252







/ Marking Instructions

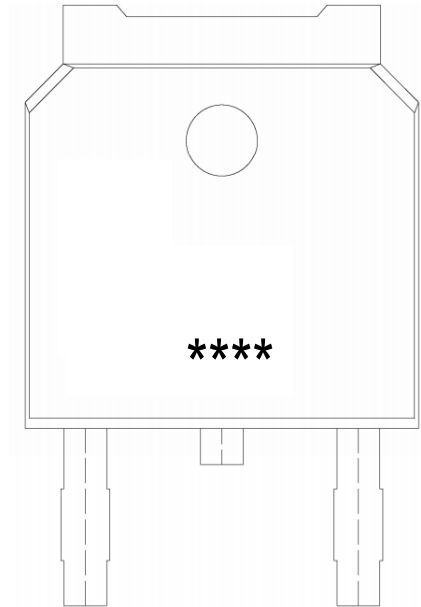

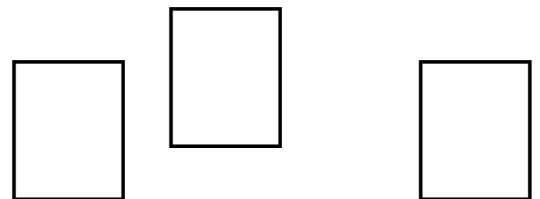




() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±


±

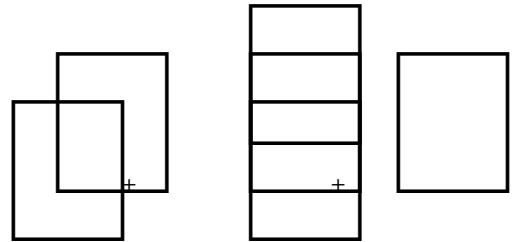

/ Resistance to Soldering Heat Test Conditions

±

±

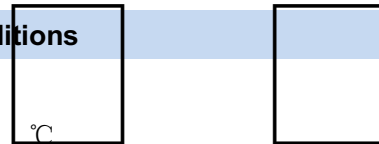

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

封装形式	包装数量					包装尺寸 :		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box	Reel	Inner Box 盒	Outer Box 箱

