



		°C	
		0	
		0	



/ Electrical Characteristics(Ta=25)


		Ω	Ω			
		μ				

/ Electrical Characteristic Curve

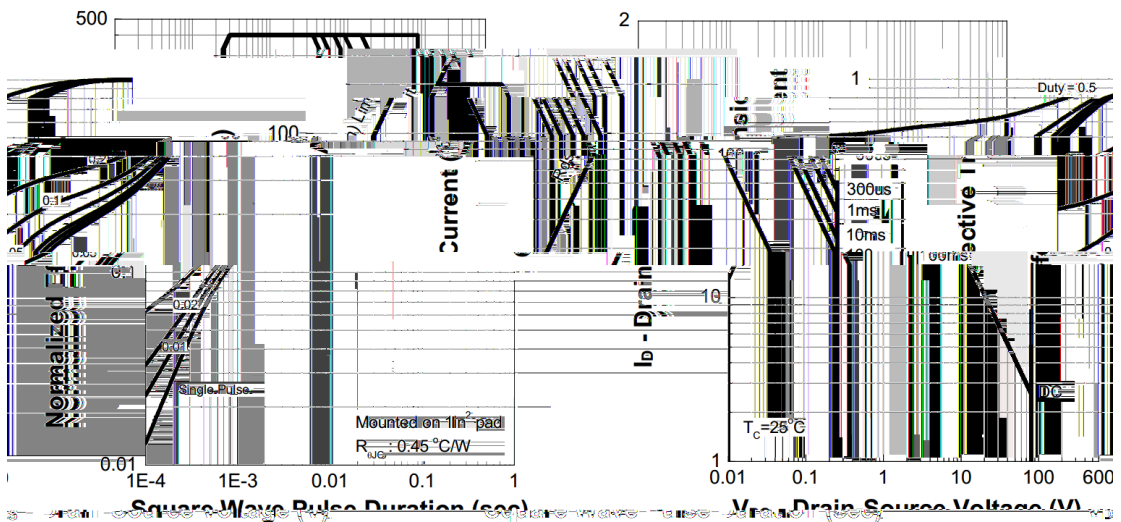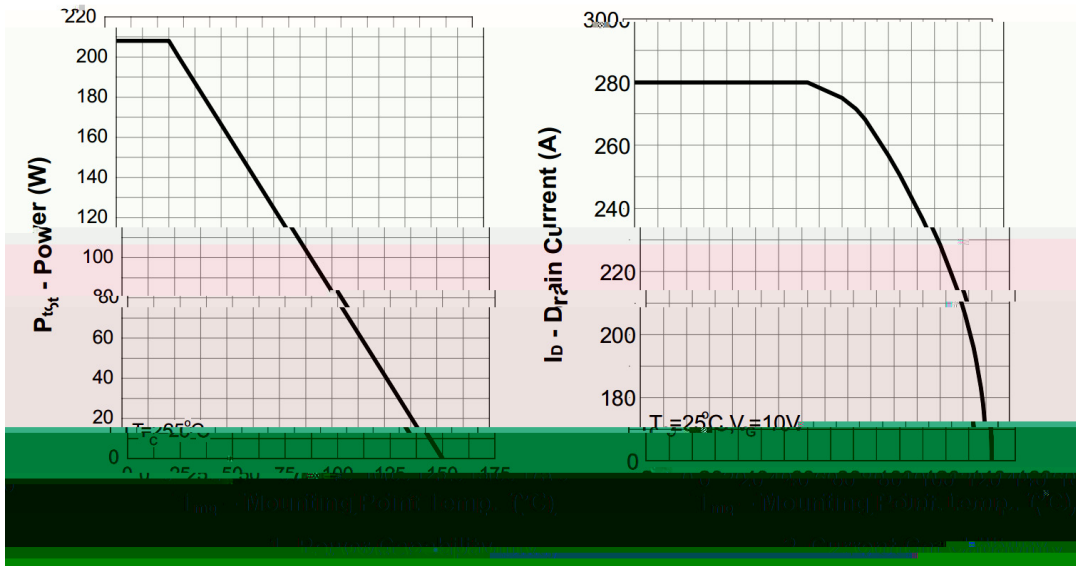

3. Safe Operating Area


4. Transient Thermal Impedance

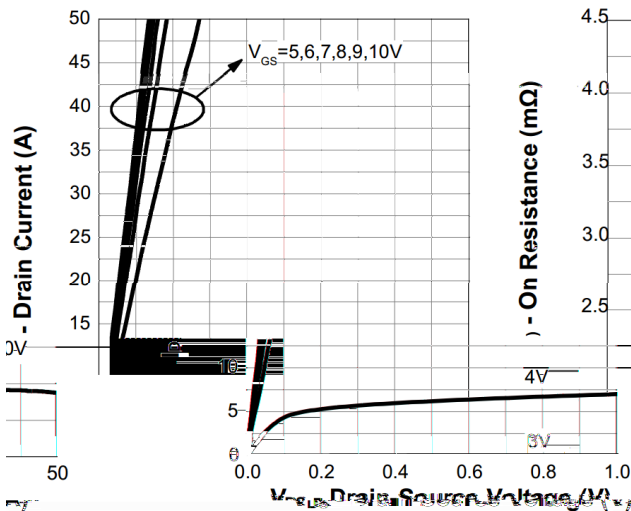


5. Output Characteristics

6. On Resistance


/ Electrical Characteristic Curve

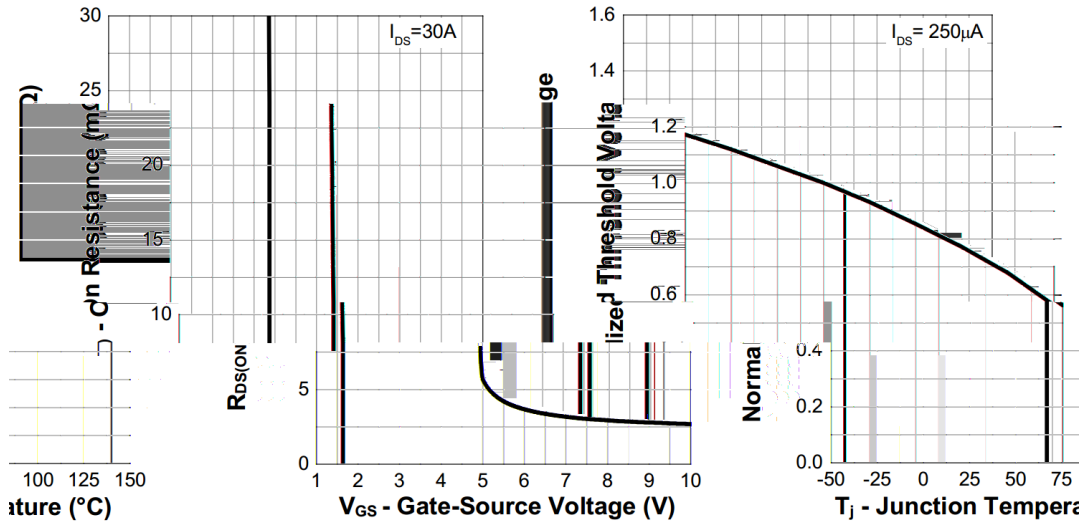

7. $R_{DS(on)}$ vs T_j for Characteristic 8. Normalized Threshold Voltage

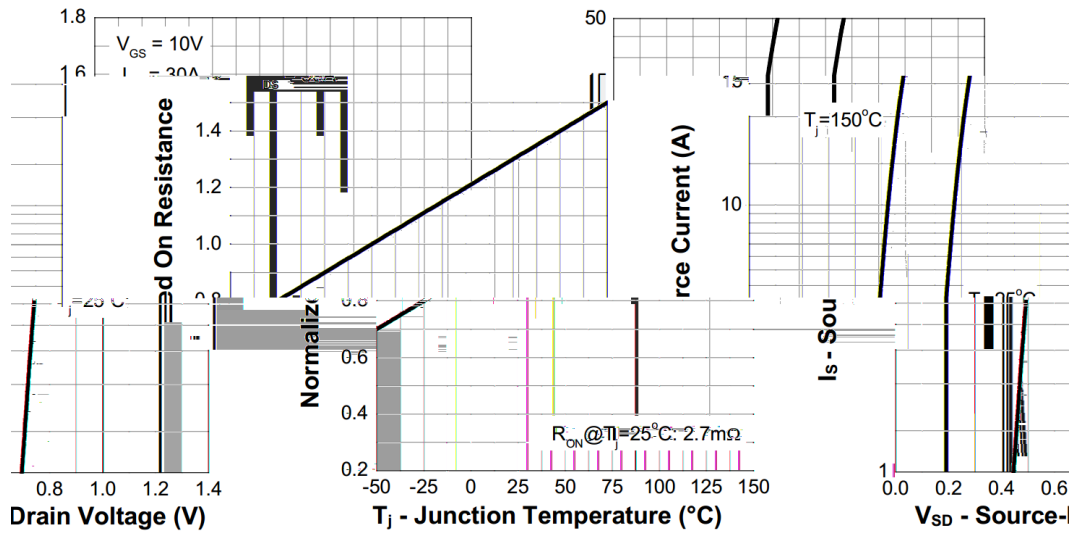


9. Forward Current 9. Normalized On Resistance 10. Diode Forward Current

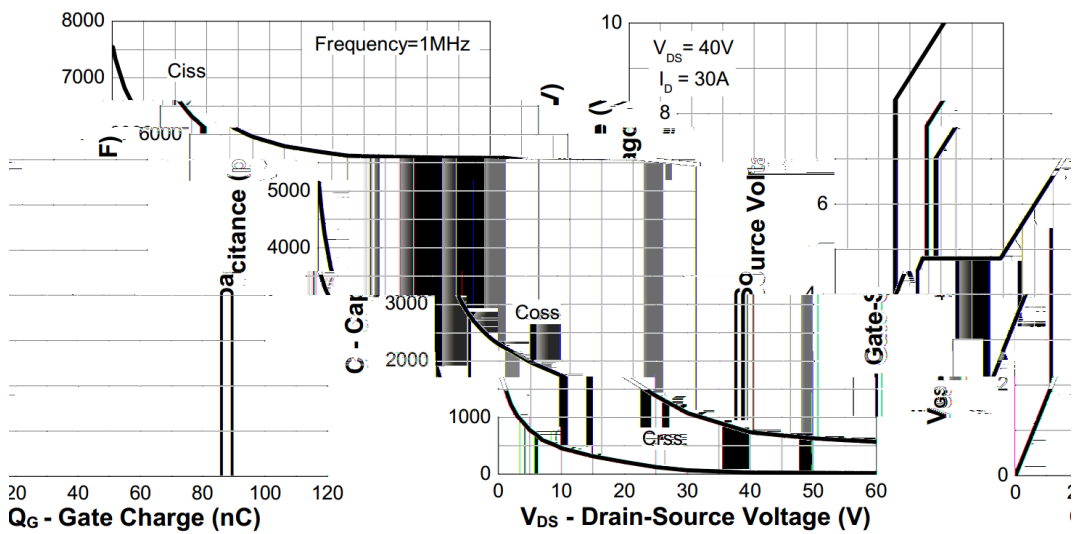



11. Capacitance 12. Gate Charge

/ Package Dimensions

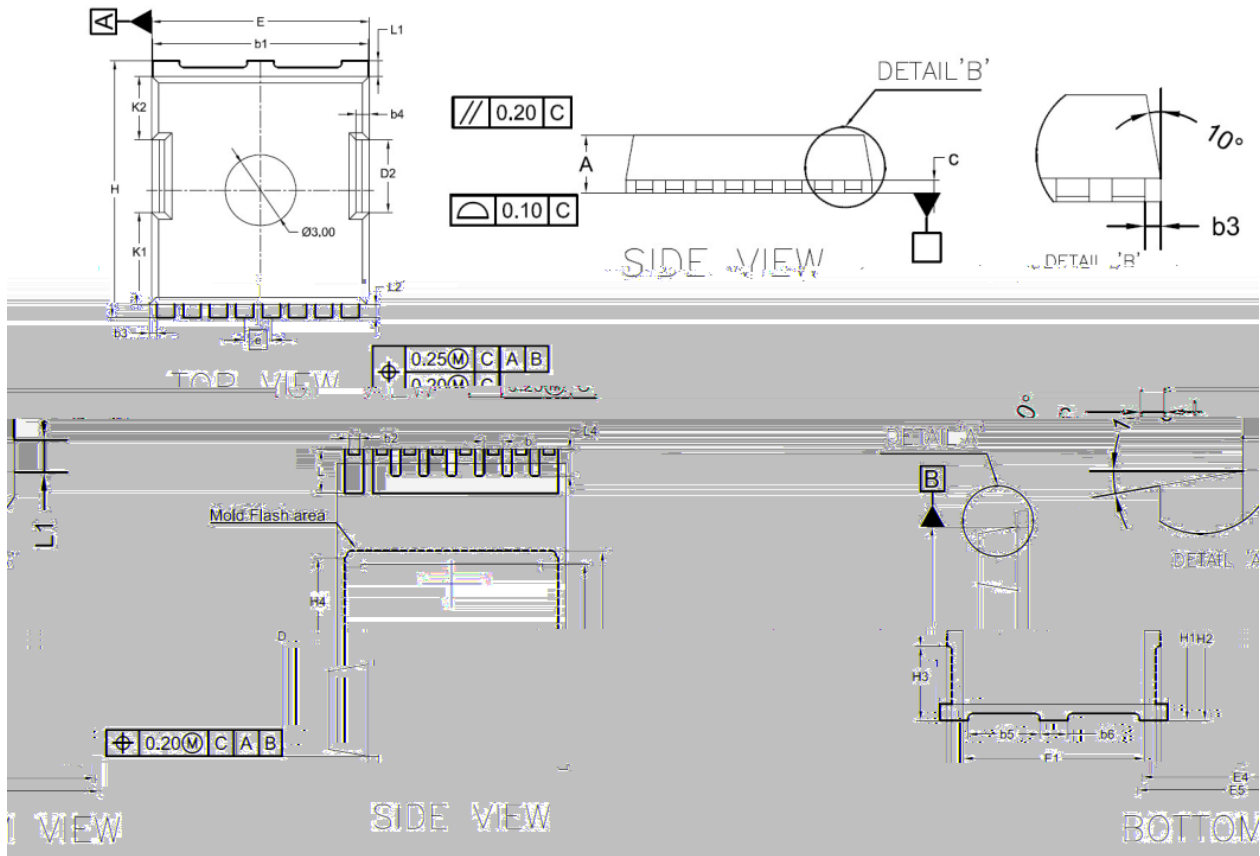


Symbol	Dimension 1			Symbol	Dimension 2		
	2.200	2.300	2.400		b1	9.700	9.800
A	2.200	2.300	2.400	b1	9.700	9.800	9.900
c	0.492	0.500	0.508	b1	0.420	0.460	0.500
D	10.280	10.380	10.480	b3	0.350		
E	9.800	9.900	10.000	b4	0.600		
e	1.20 BSC			b5	3.100		
H	11.580	11.680	11.780	b6	1.200		
H1	6.650	6.750	6.850	L	1.700	1.900	2.100
H2	7.300			L1	0.700		
H3	3.200			L2	0.600		
H4	3.800			L4	1.050	1.150	1.250
K1	4.180			L5	0.500	0.600	0.700
K2	2.900			E1	7.800		
D2	3.300			E4	8.800		
b	0.700	0.800	0.900	E5	9.200		

/ Marking Instructions



BR

() /

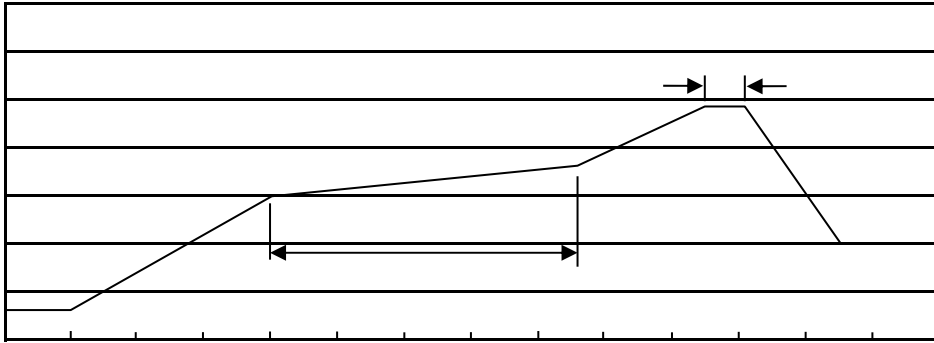

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	包装数量					包装尺寸 :		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices