

A	2021.07.21	All	AOS-AON6242		
B	2021.09.02	2	RDSON@10V	3.0mR	

Q

AEC-Q101

A 2022-7-2

all

5°C

Q

245±

5±0.5sec


/ Descriptions

× .


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

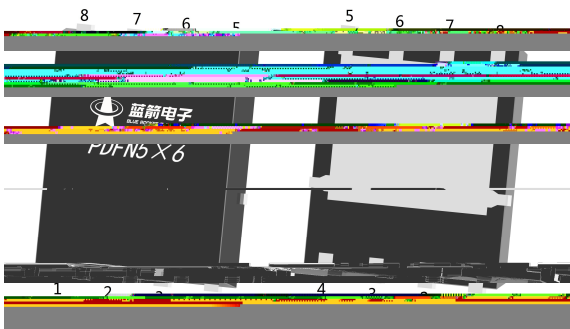


Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

见印章说明。



BRCS035N06SZCQ





/ Electrical Characteristics(Ta=25)


		Ω	Ω			

/ Electrical Characteristic Curve

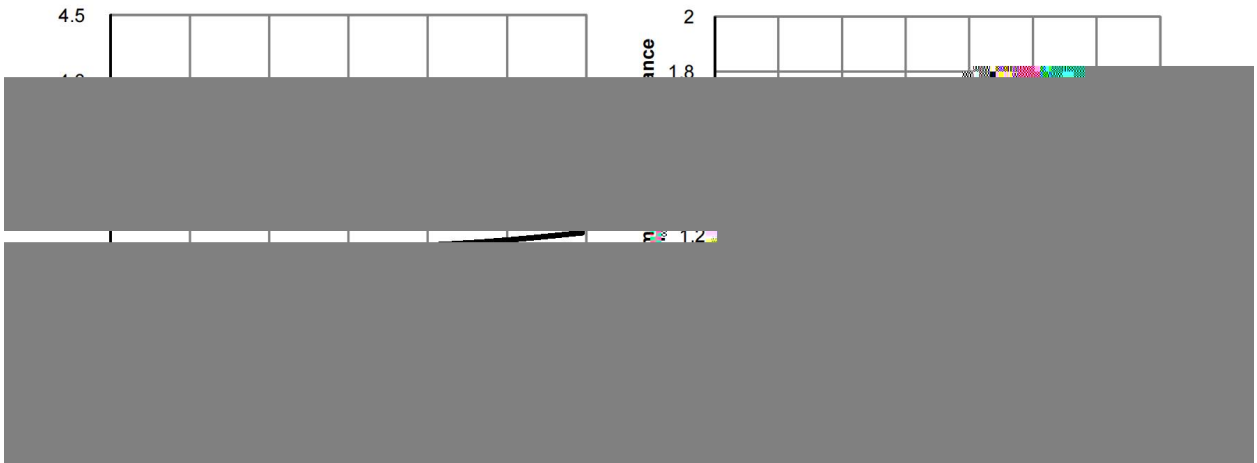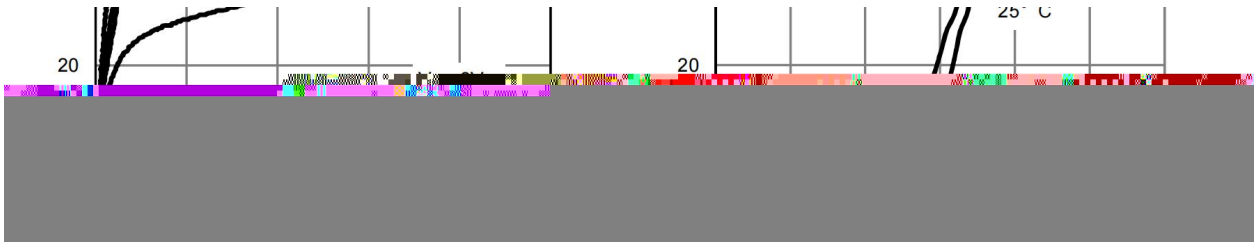


/ Electrical Characteristic Curve

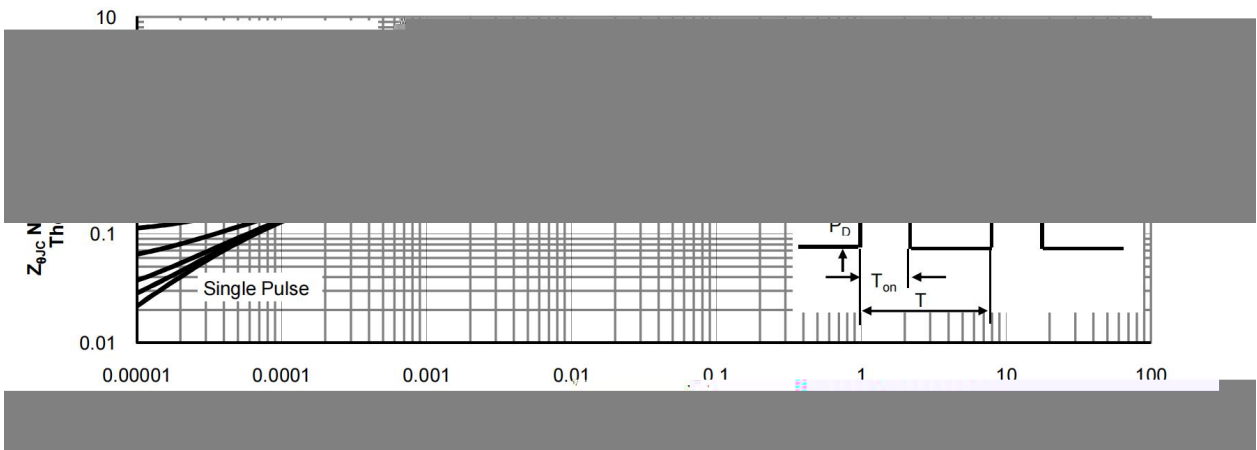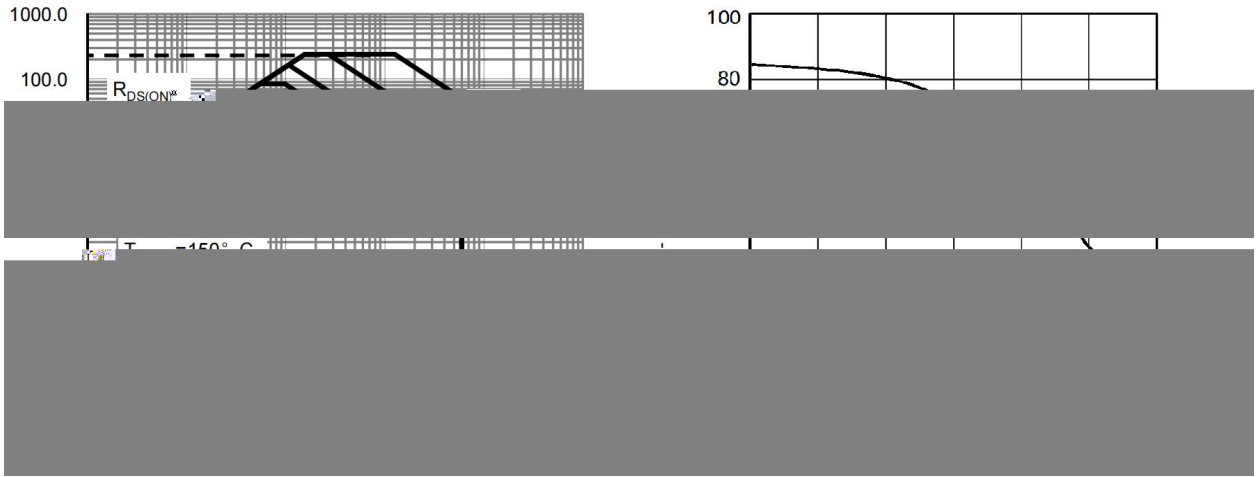




/ Package Dimensions

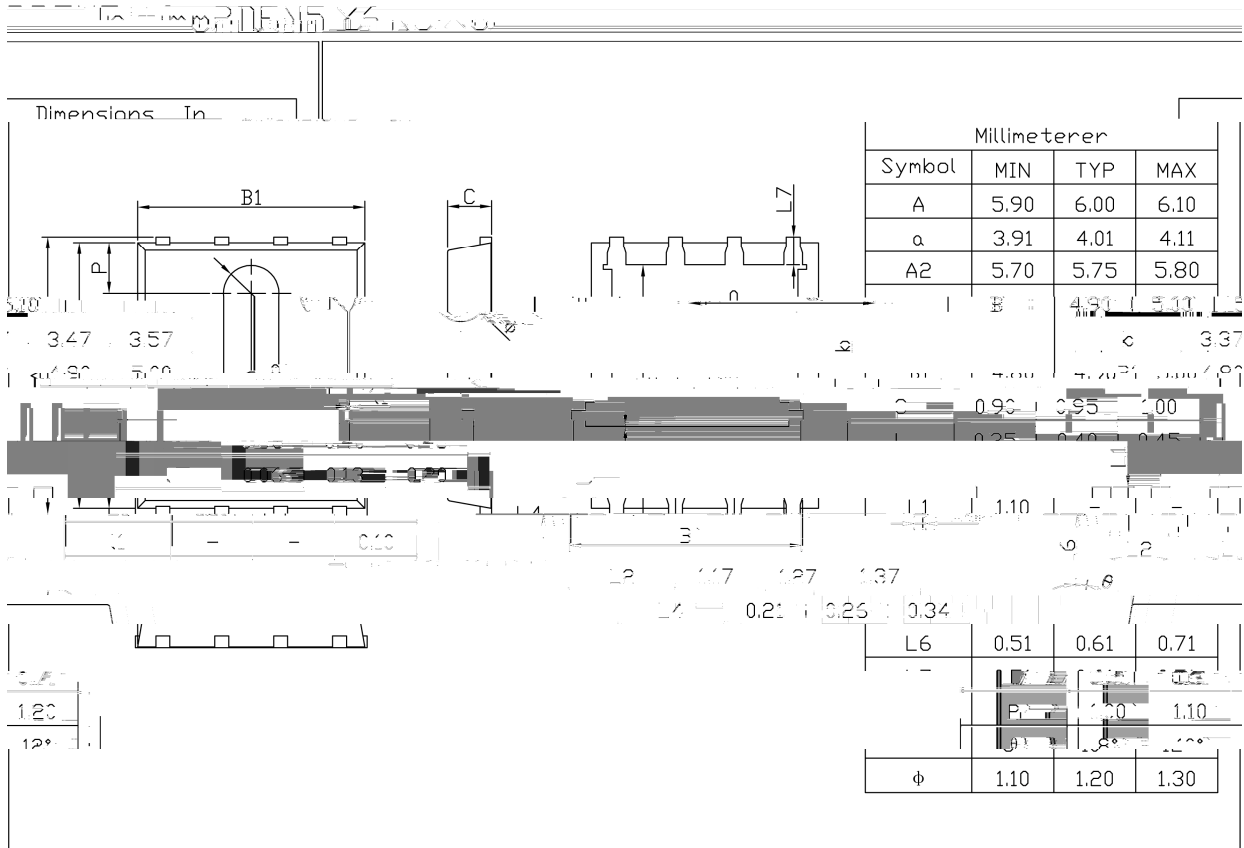

Rev.00 201812


/ Marking Instructions

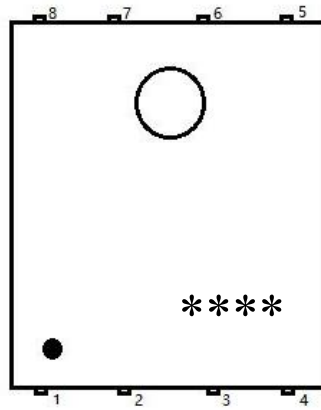

BR

Q

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

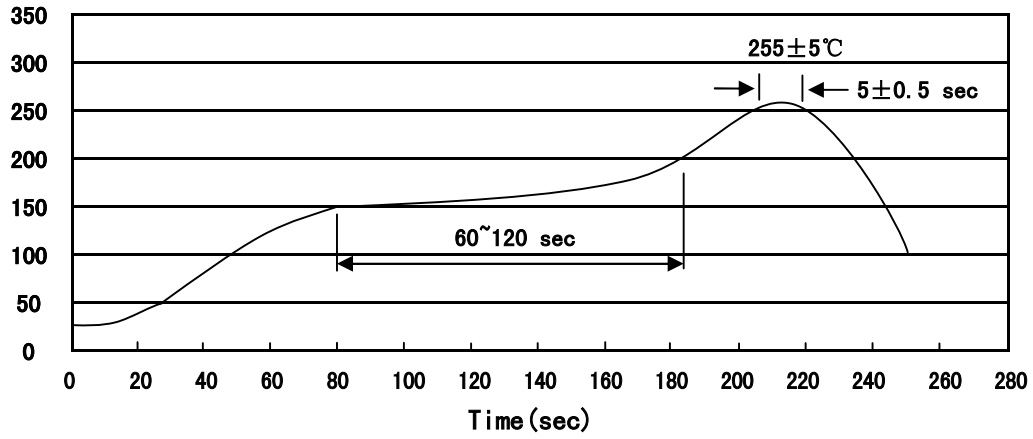

/ Resistance to Soldering Heat Test Conditions

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
×						×	× ×	× ×

/ Notices