

Fig 1: On-Region Characteristics

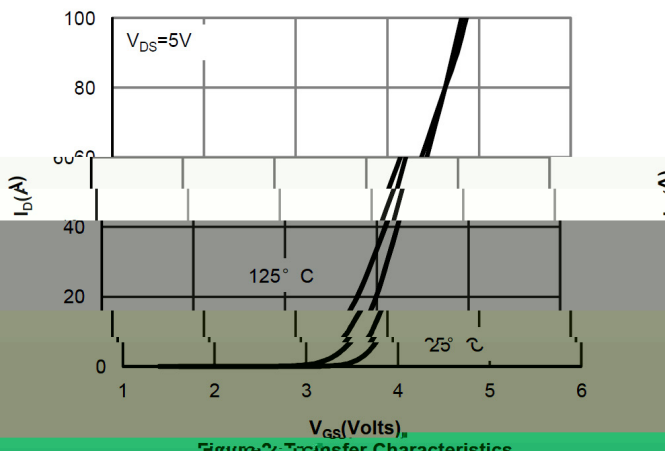


Figure 2: Transfer Characteristics

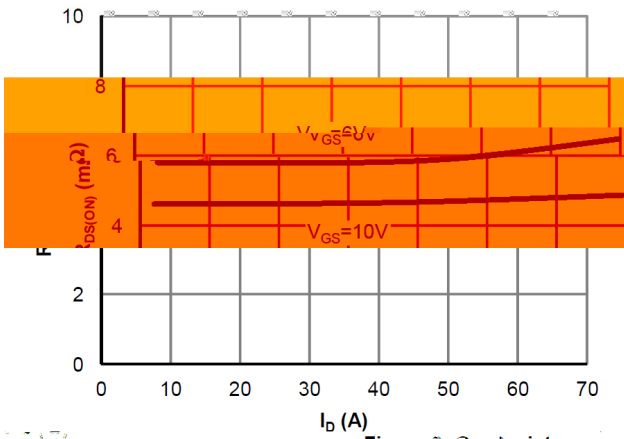


Figure 3: On-resistance vs. Drain Current and Gate Voltage

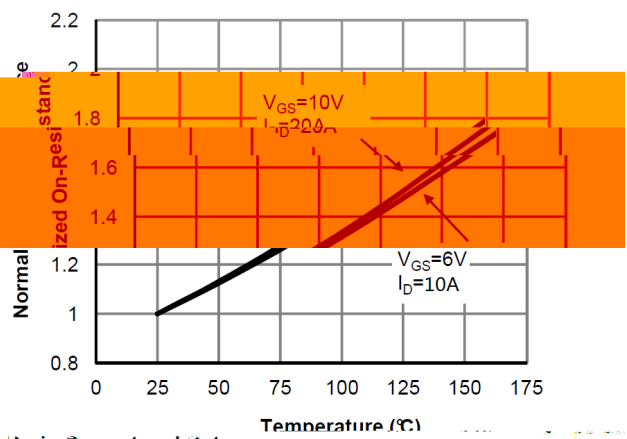


Figure 4: On-resistance vs. Temperature

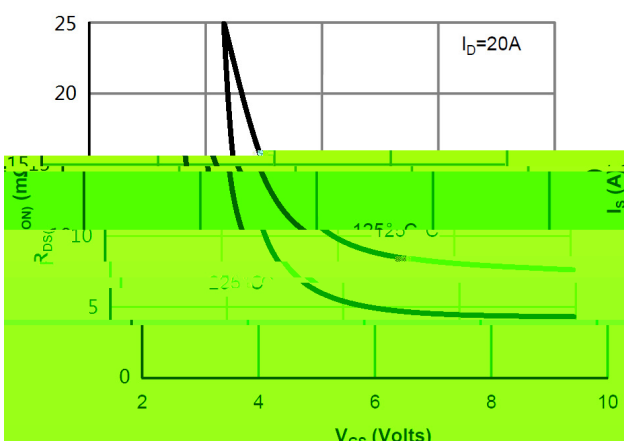


Figure 5: On-resistance vs. Gate-Source Voltage

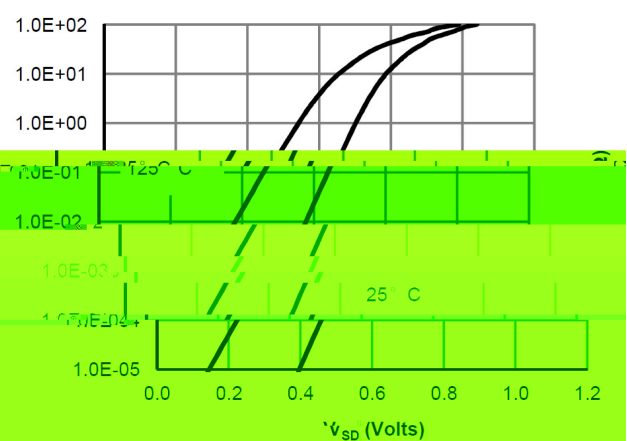


Figure 6: Output Characteristics

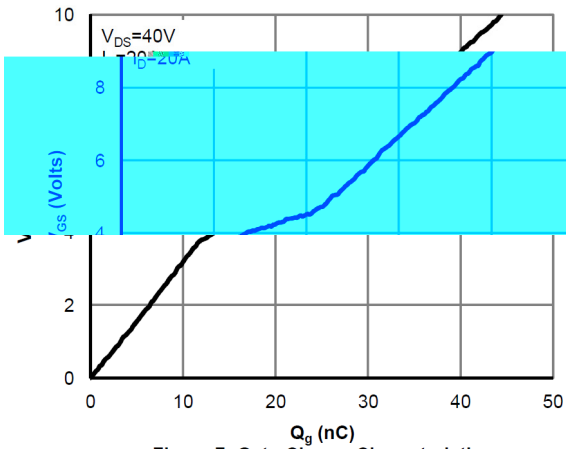


Figure 7: Gate-Charge Characteristics

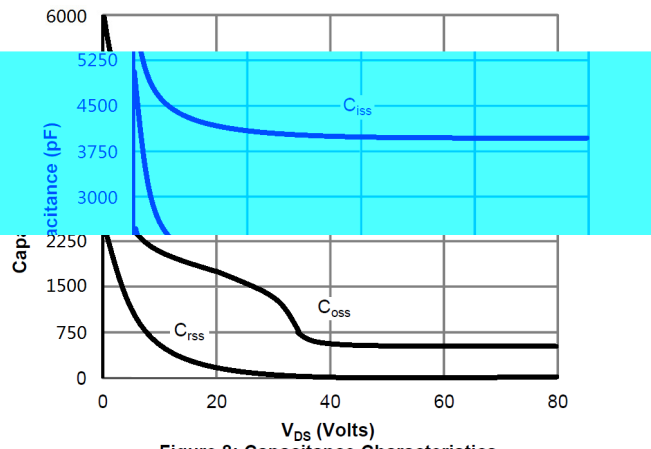


Figure 8: Capacitance Characteristics

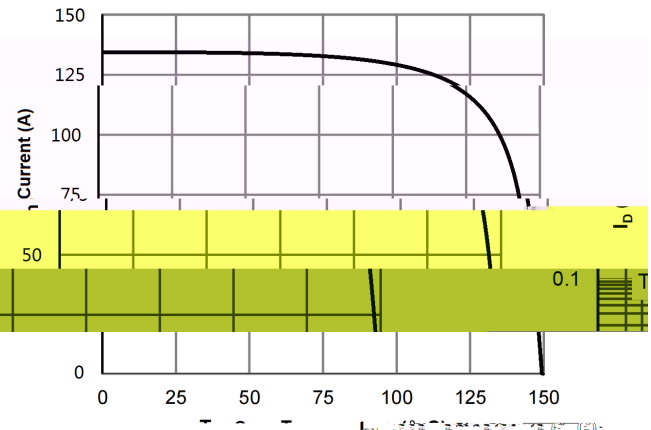
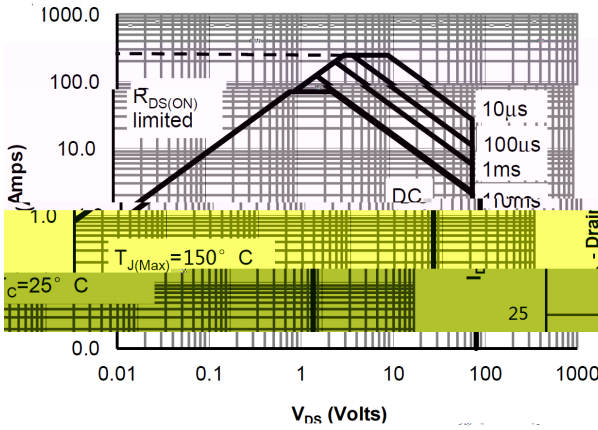


Figure 9: Maximum Continuous Drain Current


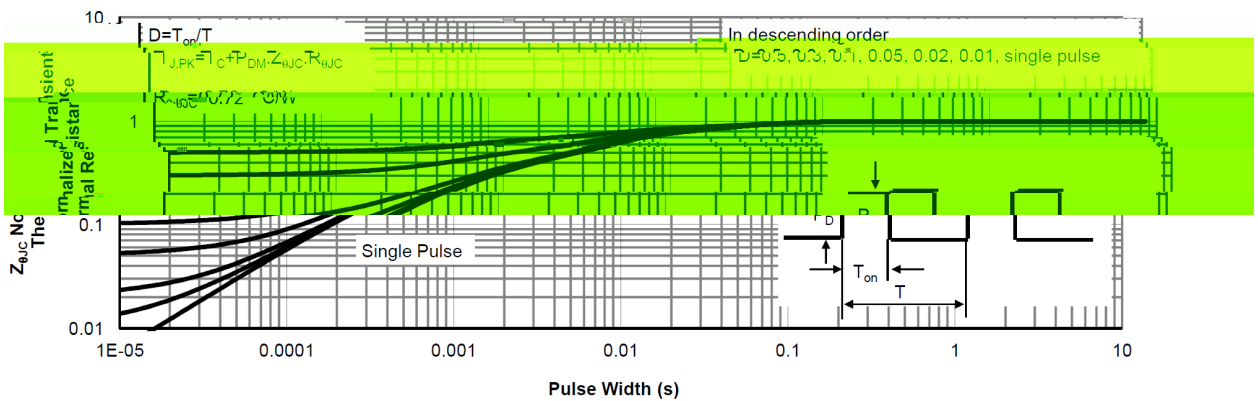



Figure 11: Normalized Maximum Transient Thermal Impedance

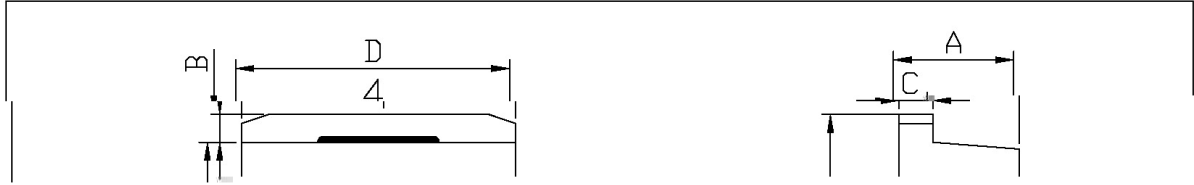

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	0.00	0.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.40	0.60	L2	2.24	2.84
C	1.20	1.40	L3	1.20	1.60
D	9.80	10.20			

TP-263

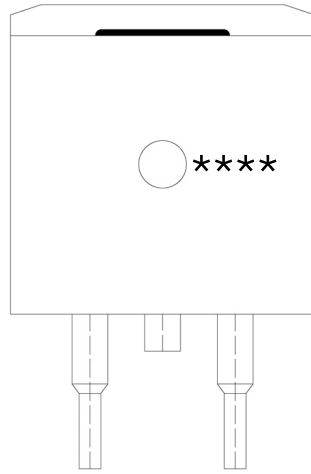

91

' , , E' /J?

!!!!

