
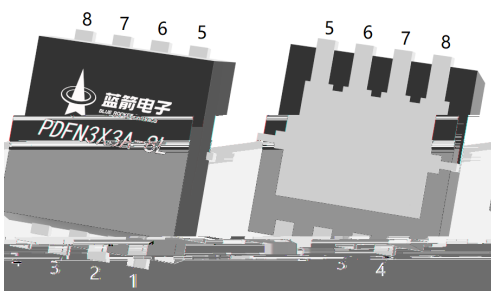


±



出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

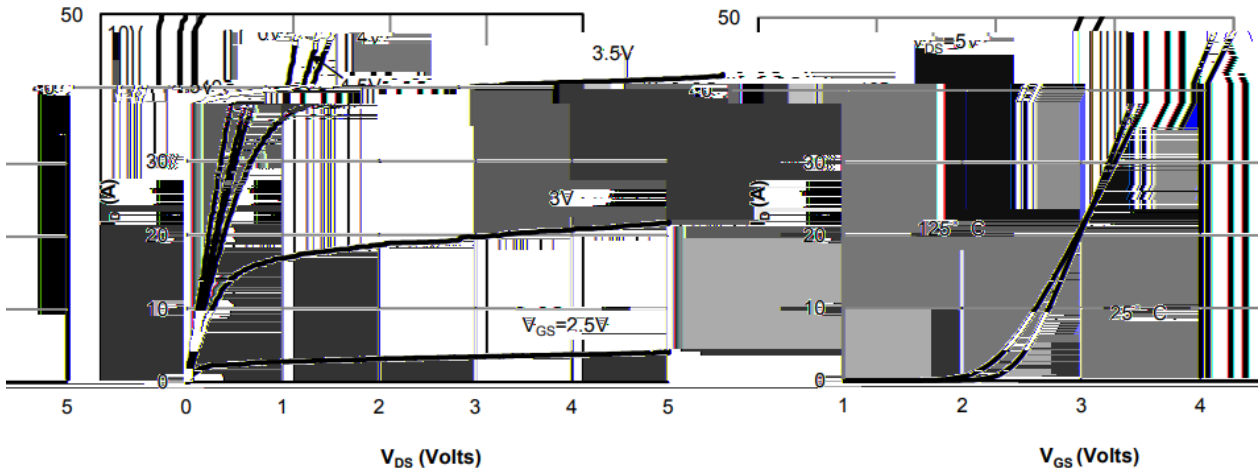


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

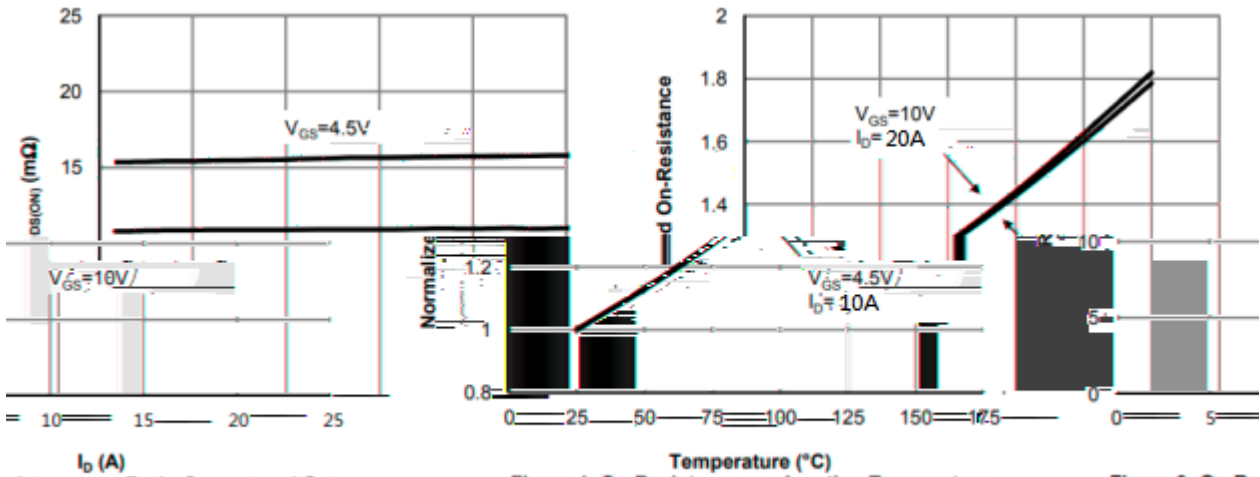


Figure 4: On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

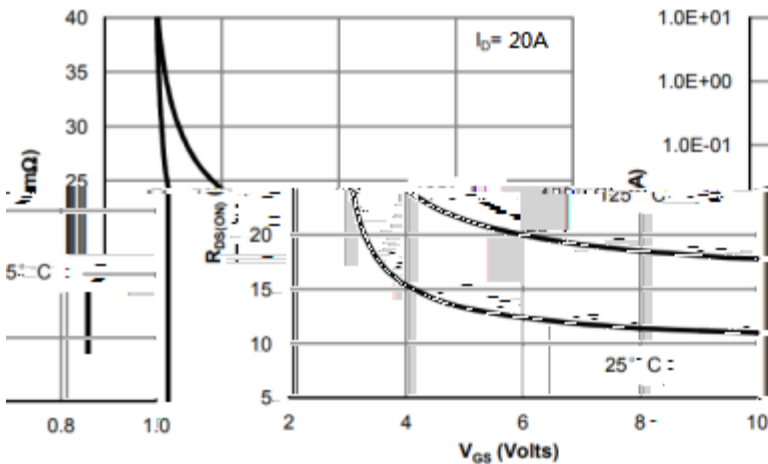


Figure 5: On-Resistance vs. Gate-Source Voltage

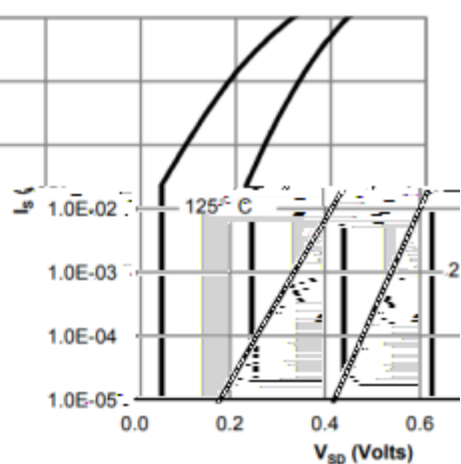


Figure 6: Body-Diode Characteristics

Characteristics




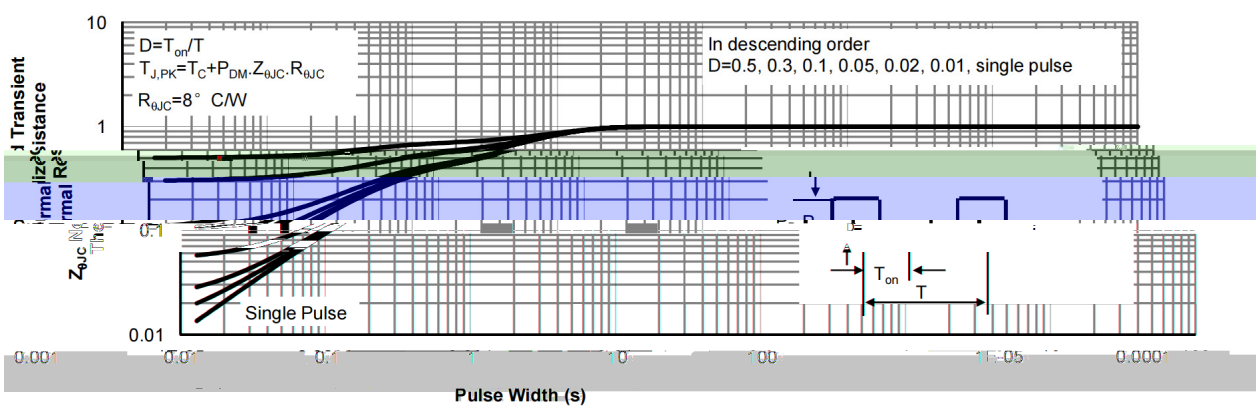


Figure 11: Normalized Maximum Transient Thermal Impedance

PDFN3X3A-8L

Unit:mm

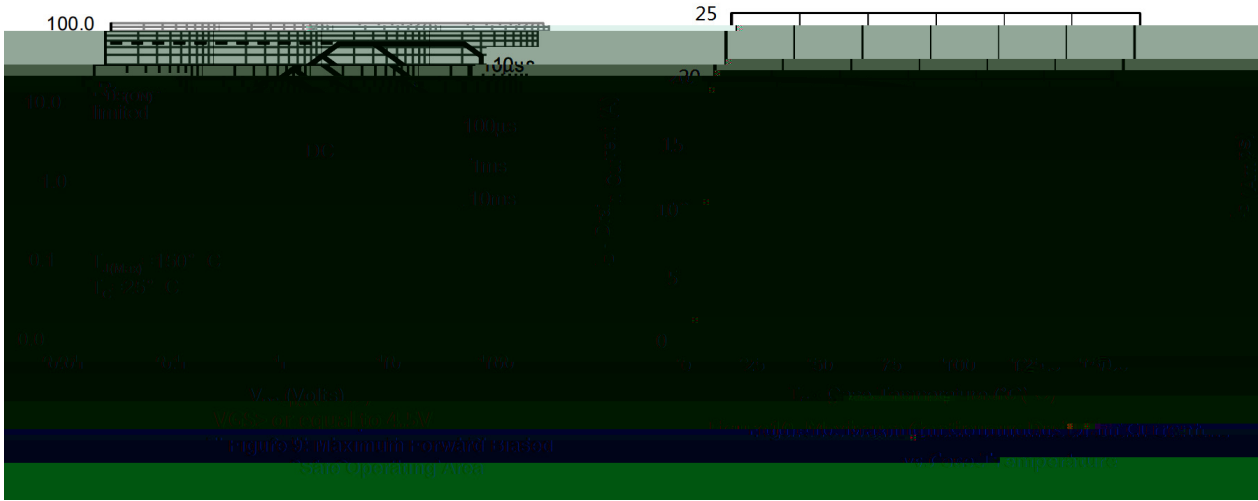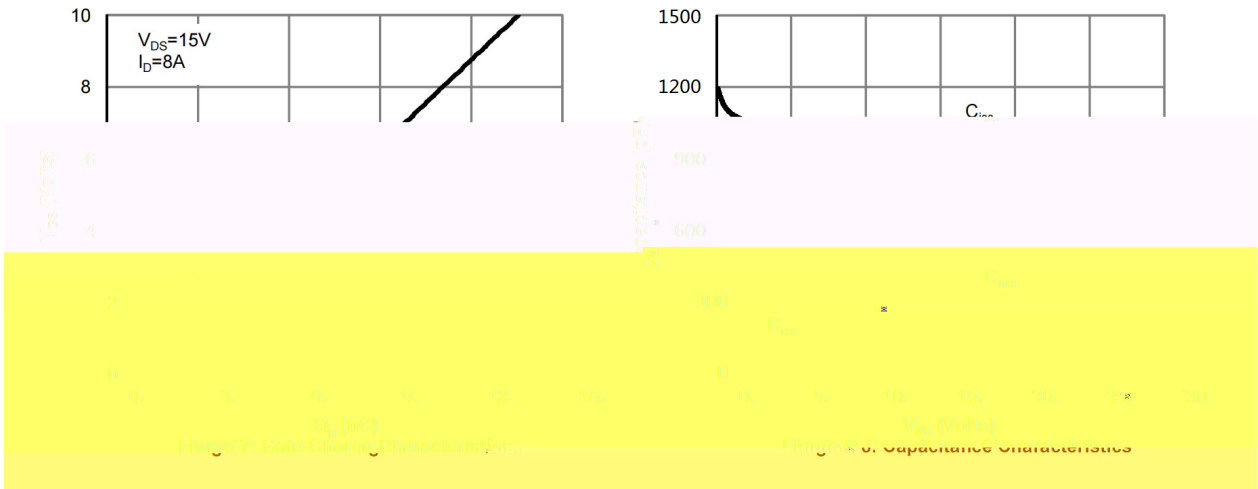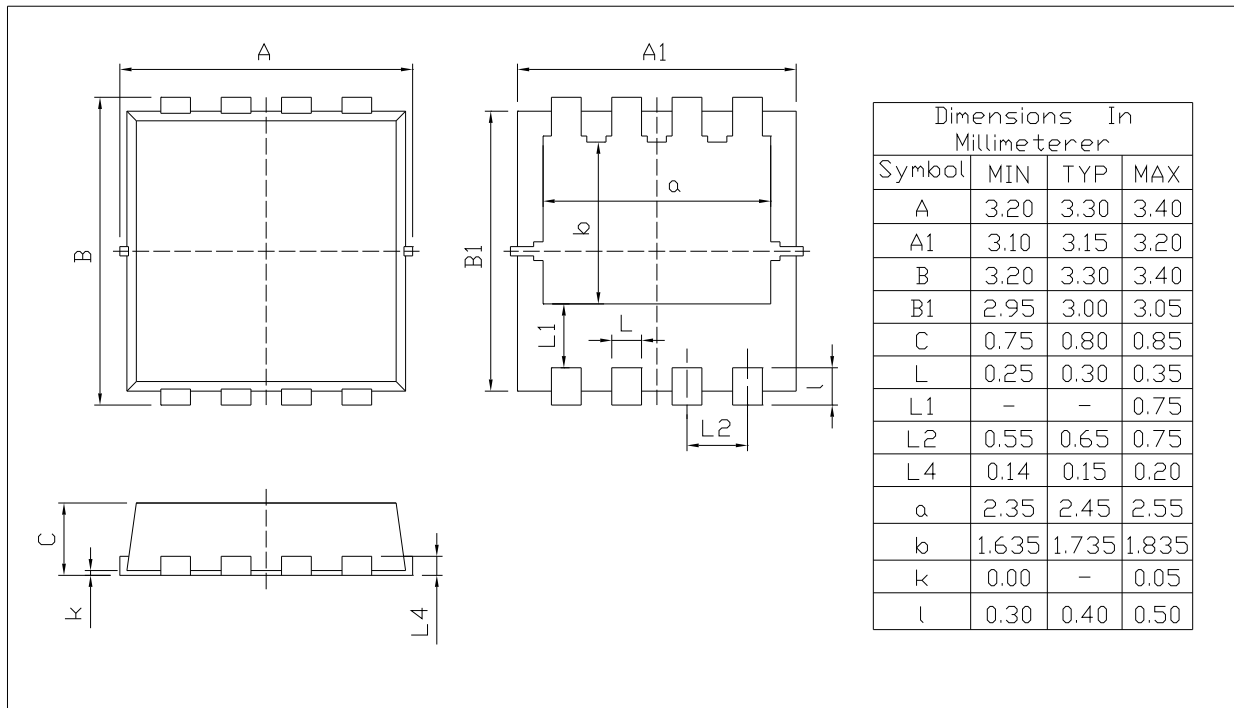

Rev.00 202011

