
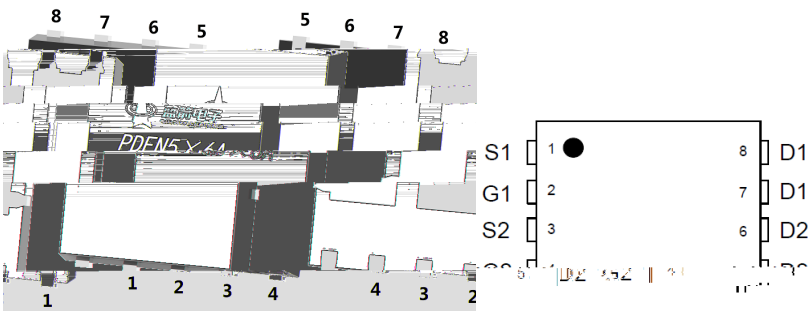



×

×

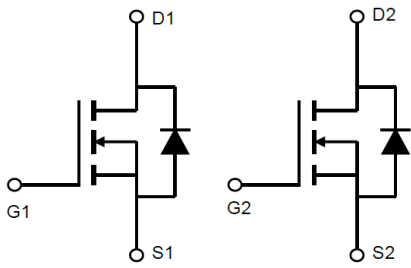

。





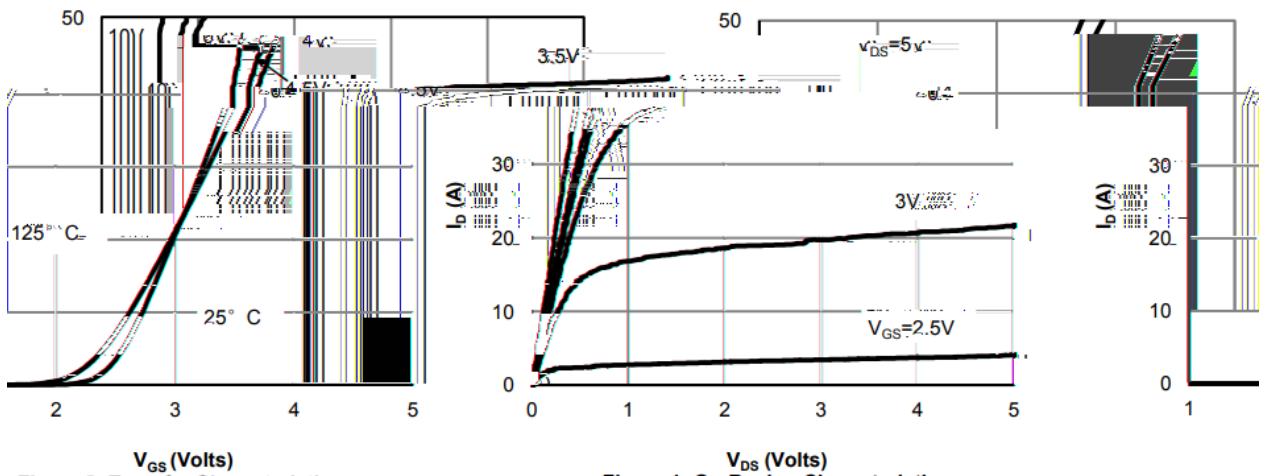


Figure 2: Transfer Characteristics

Figure 1: On-Region Characteristics

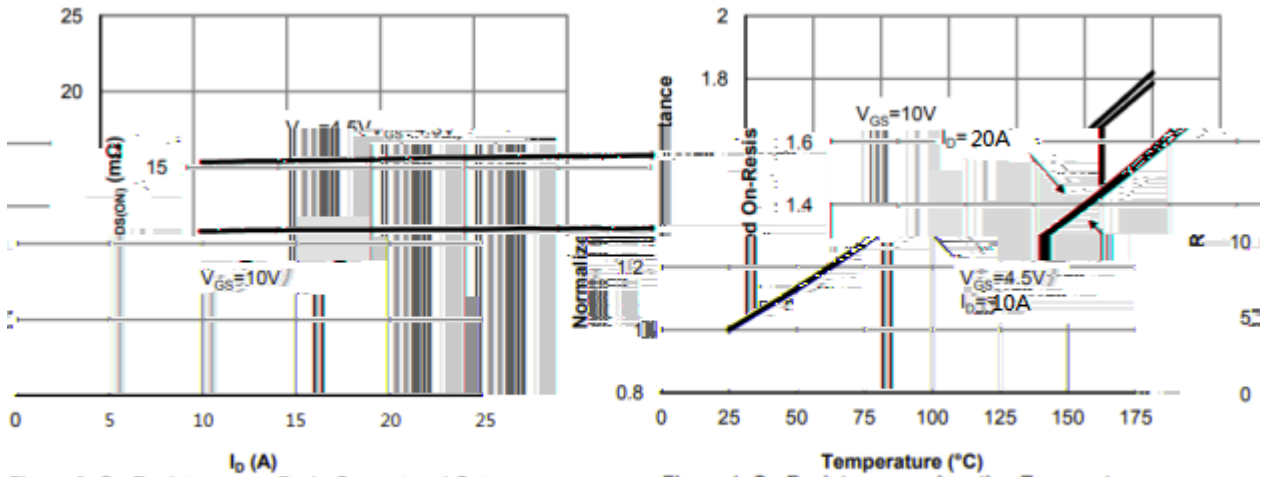


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Junction Temperature

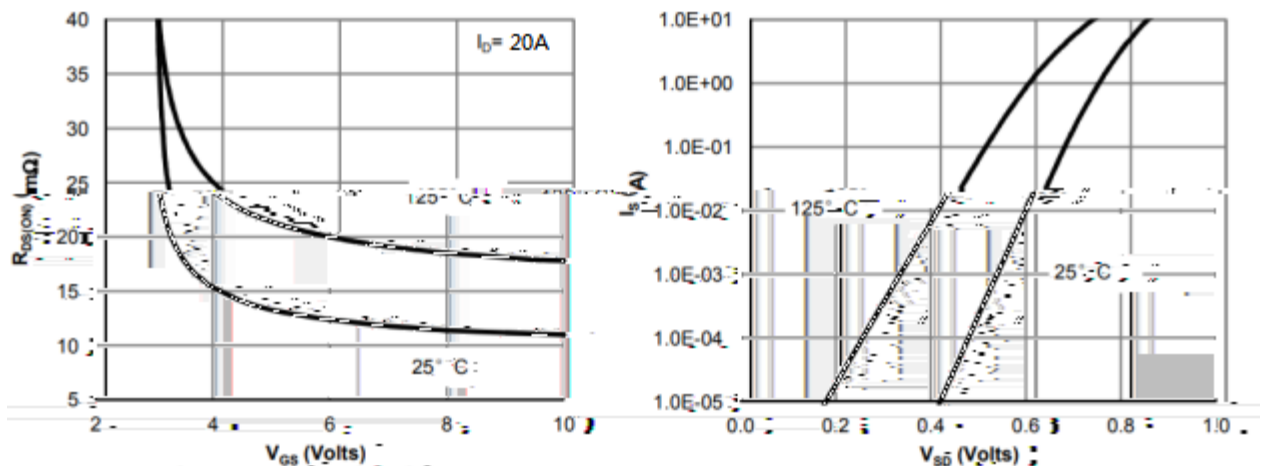


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

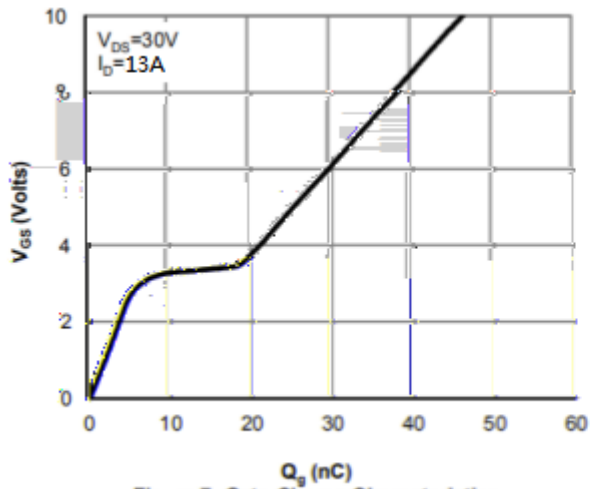


Figure 7: Gate Charge Characteristics

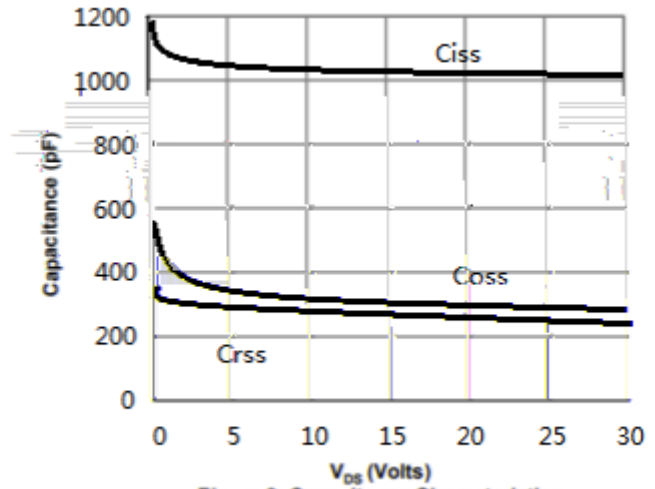


Figure 8: Capacitance Characteristics

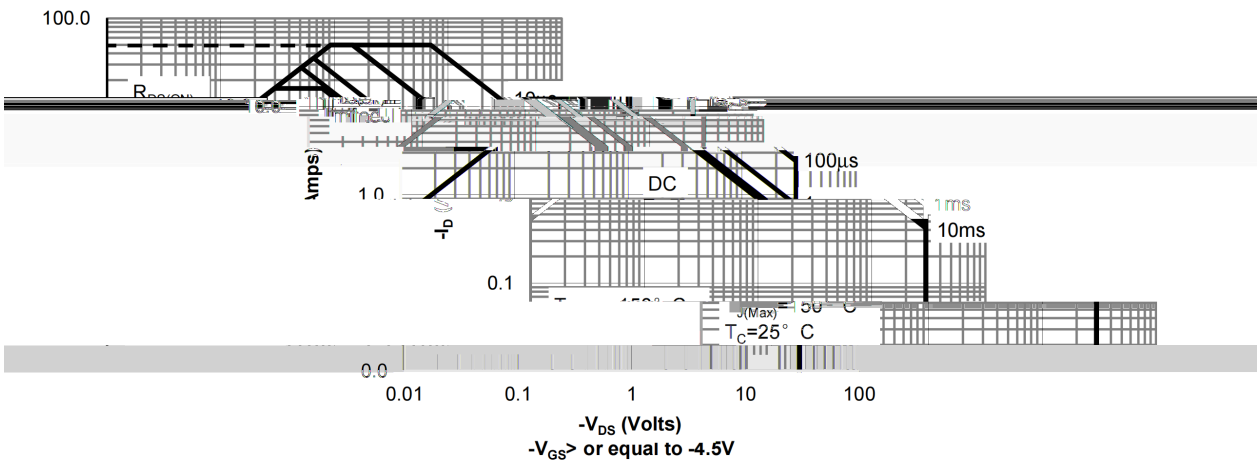


Figure 9: Maximum Permitted Peak Current Operating Area


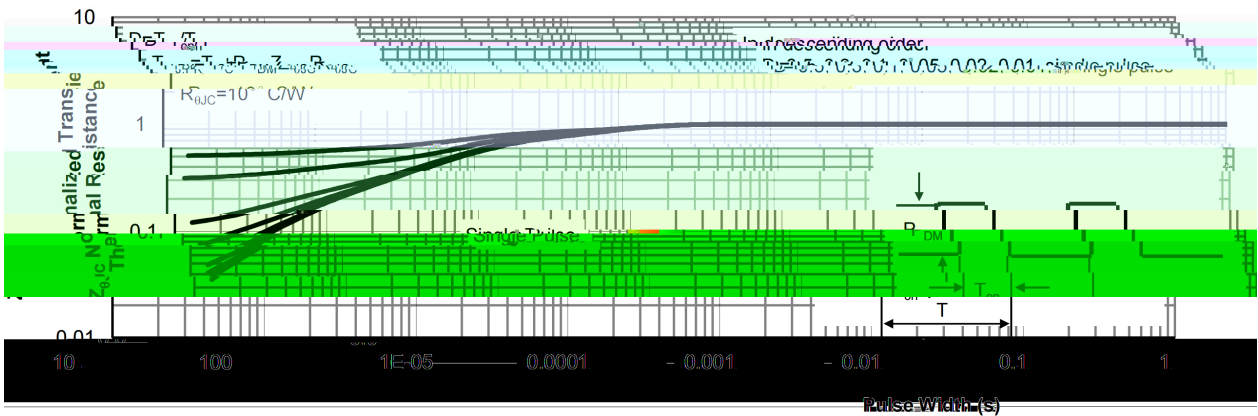



Figure 10: Normalized Maximum Transient Thermal Impedance

PDFN5 X6A

Unit:mm

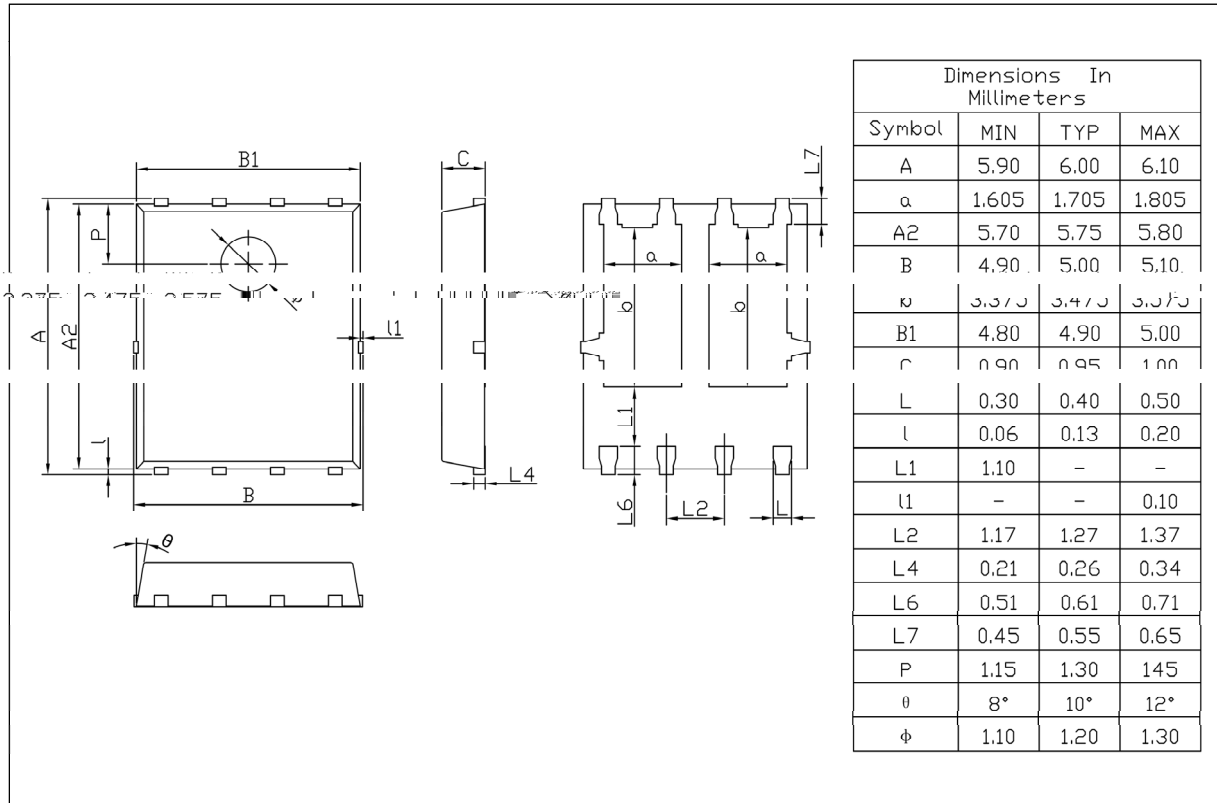

Rev.01 202209

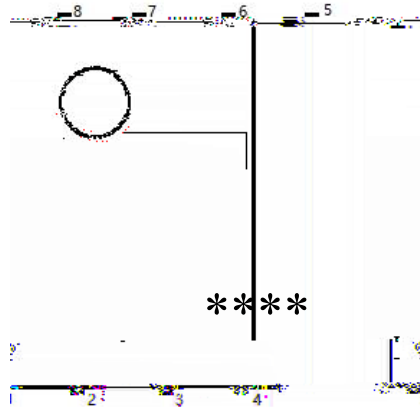

BR
