



P

。

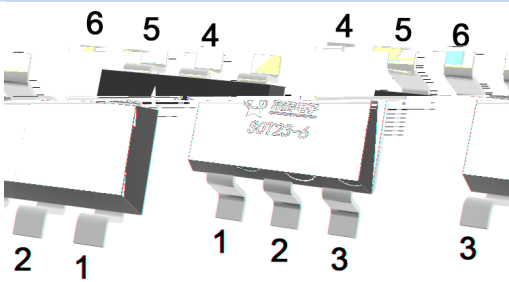



--	--	--	--	--	--	--

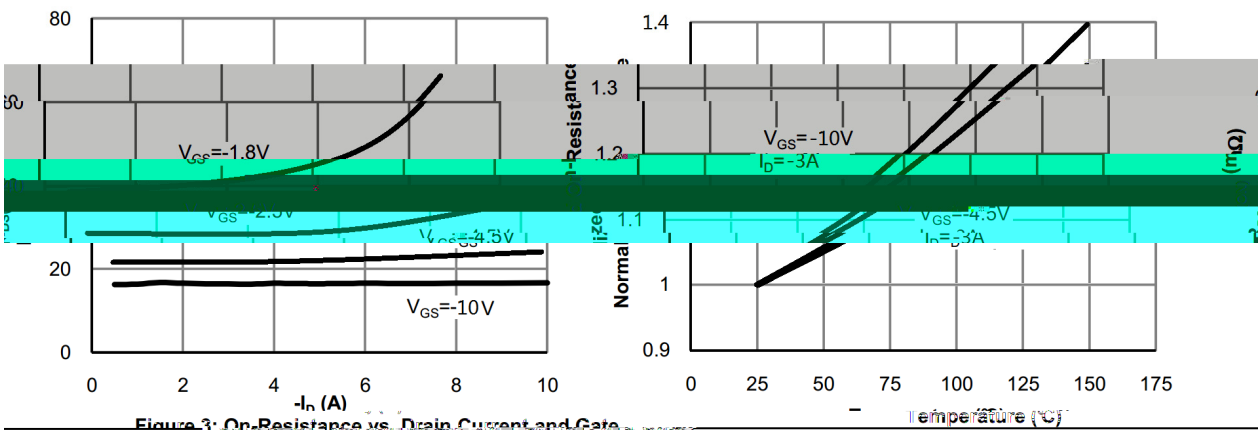
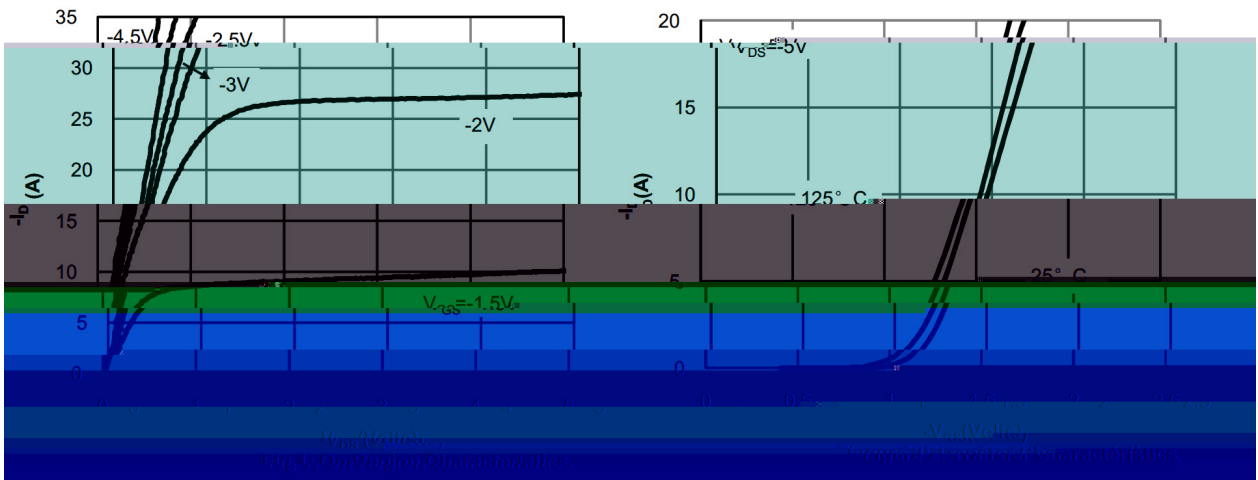


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

Figure 4. On-Resistance vs. Junction Temperature





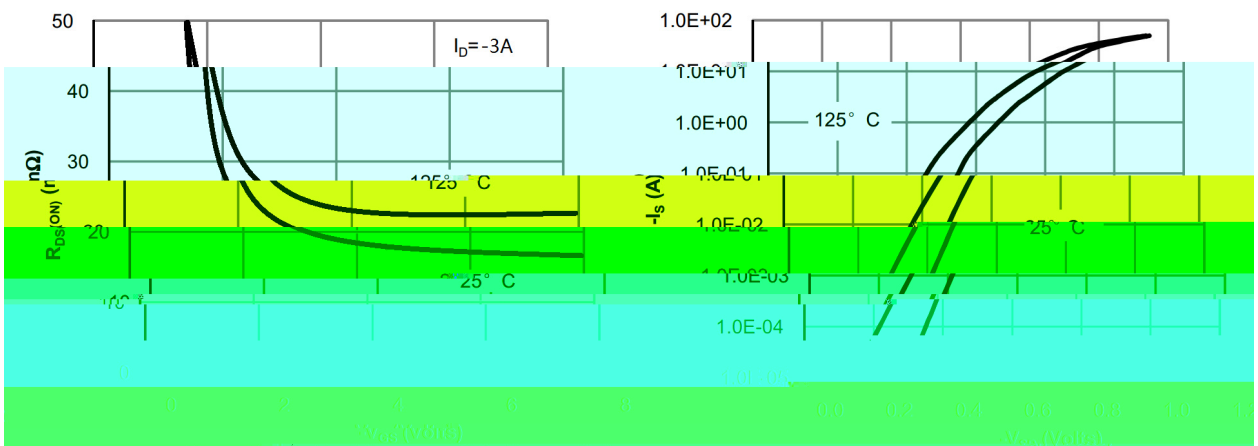


Figure 5. Reverse Recovery Characteristics

Figure 6. Body Diode Characteristics

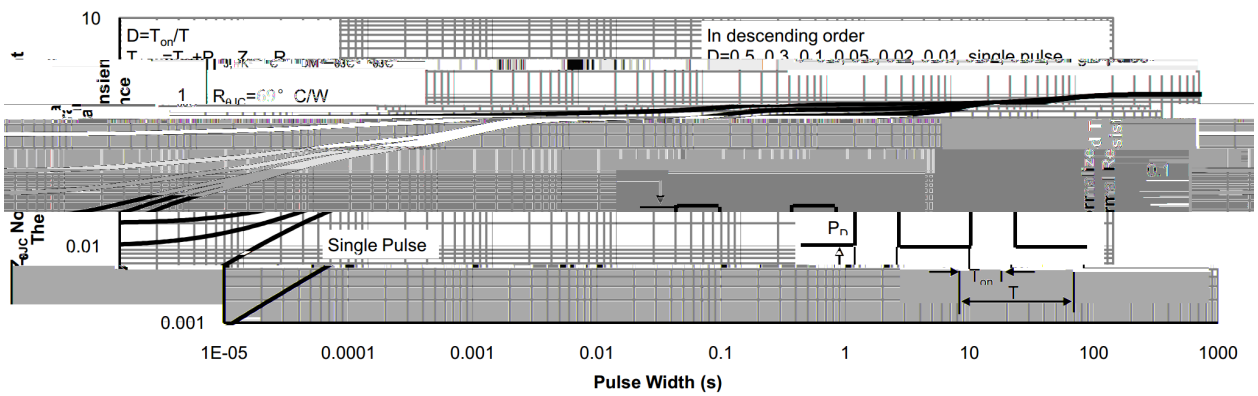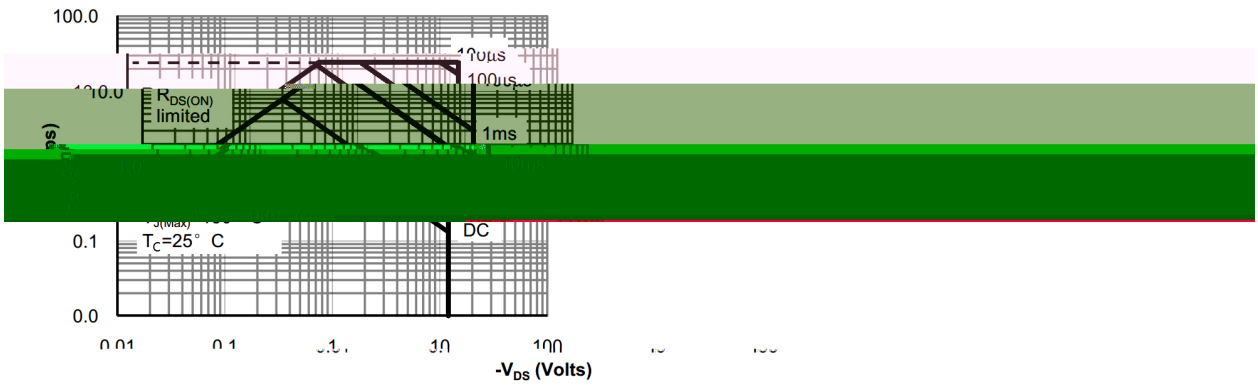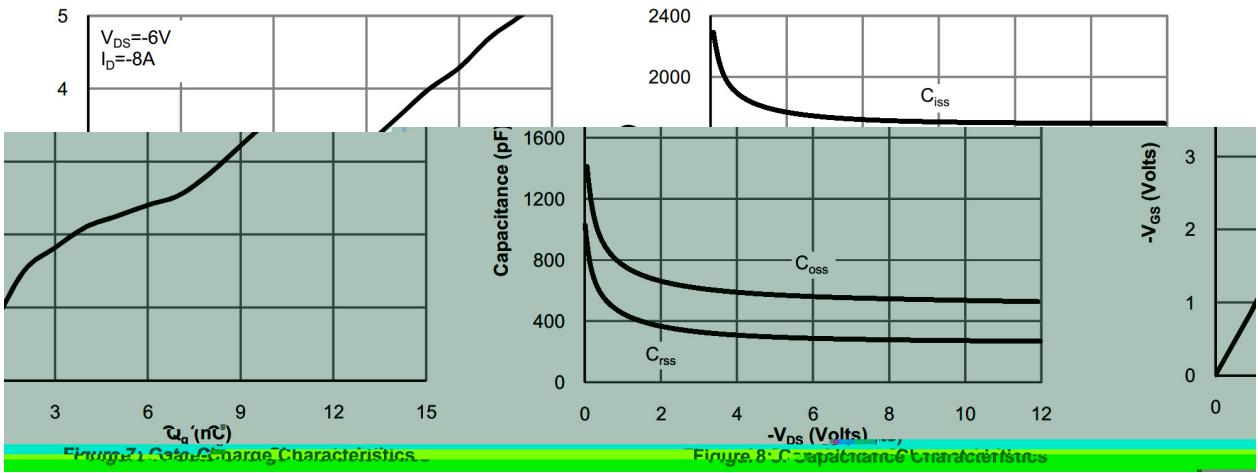

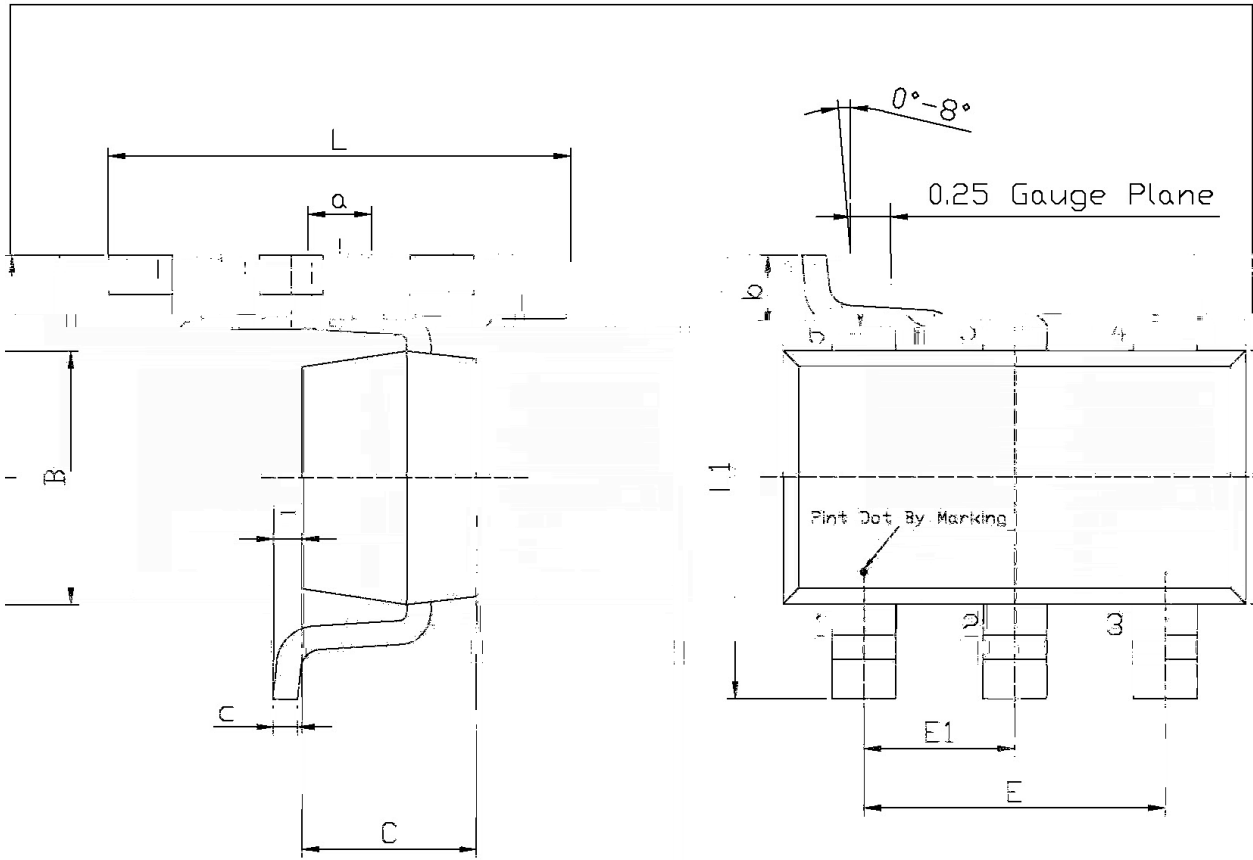

Unit: mm

Symbol	Dimensions In Millimeters	
	Min	Max
E1	0.85	1.05
a	0.35	0.50
c	0.10	0.20
b	0.35	0.55
F	0	0.15

Symbol	Dimensions In Millimeter	
	Min	Max
L	2.82	3.32
B	1.50	1.70
C	0.90	1.30
L1	2.60	3.00
E	1.80	2.00

23-6

SOT-23

