


/ Descriptions

/ Features


$\Omega$   
 $\Omega$

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking





--	--





/ Electrical Characteristics(Ta=25 )

		Ω Ω				


/ Electrical Characteristic Curve

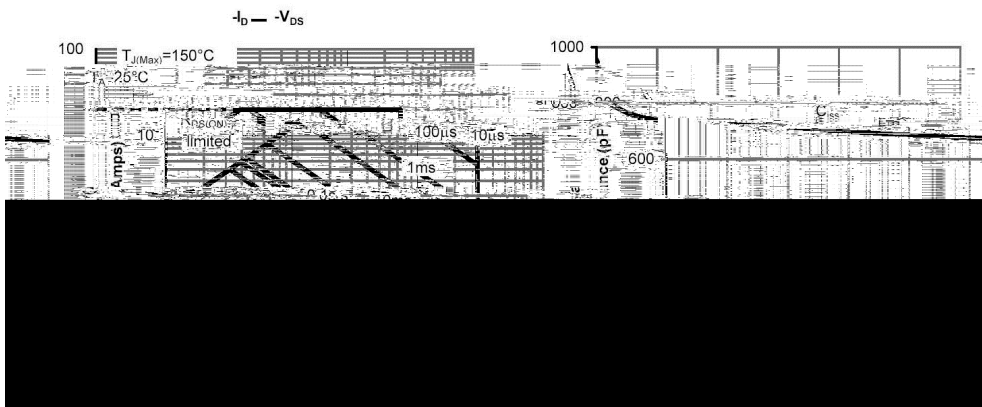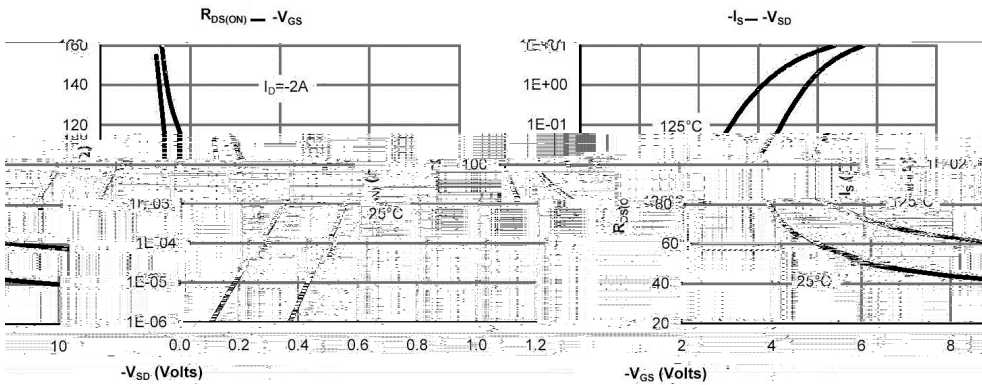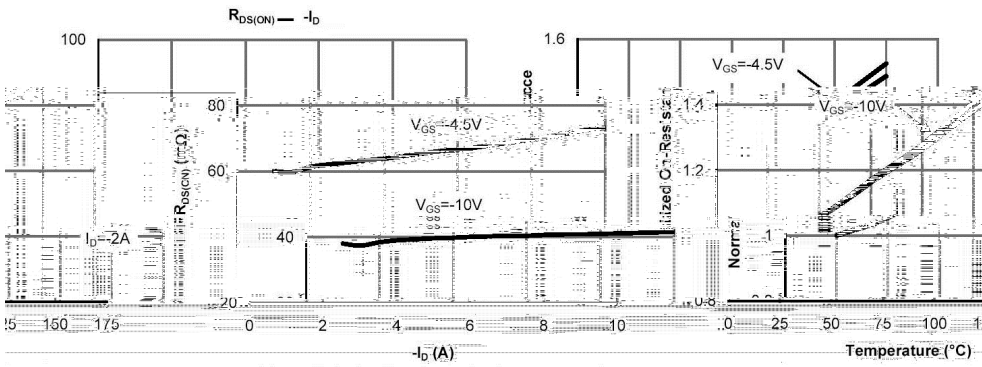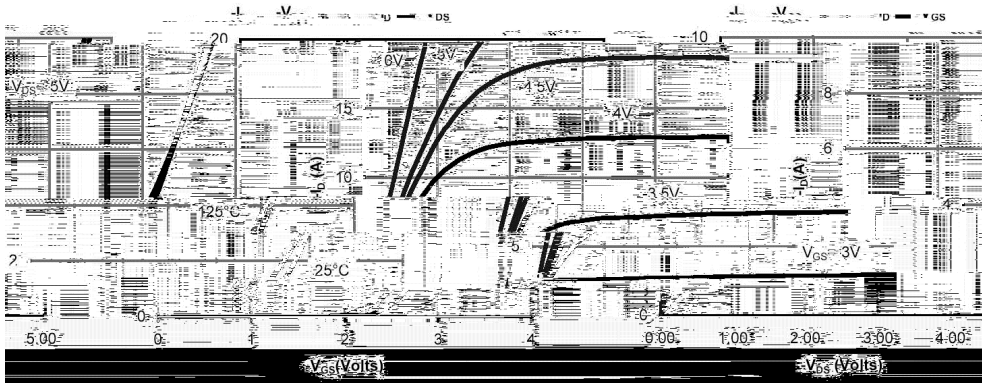

/ Electrical Characteristic Curve

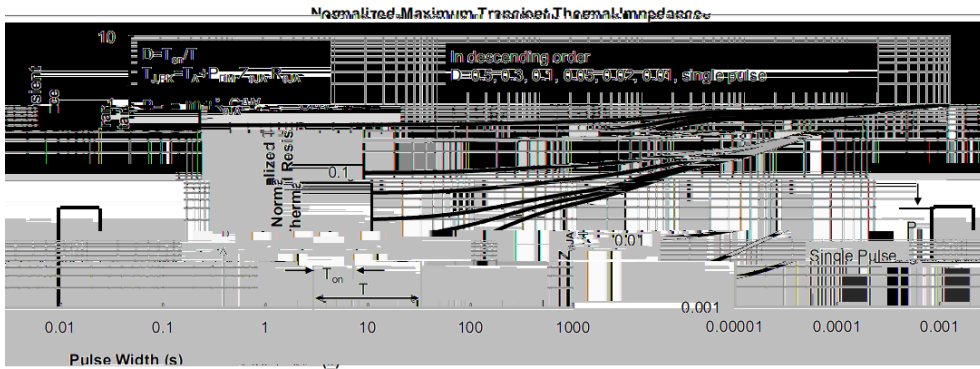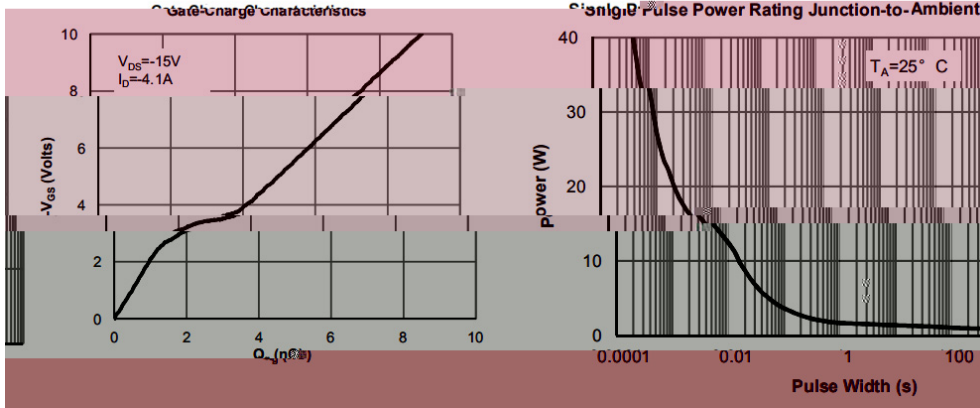


/ Package Dimensions

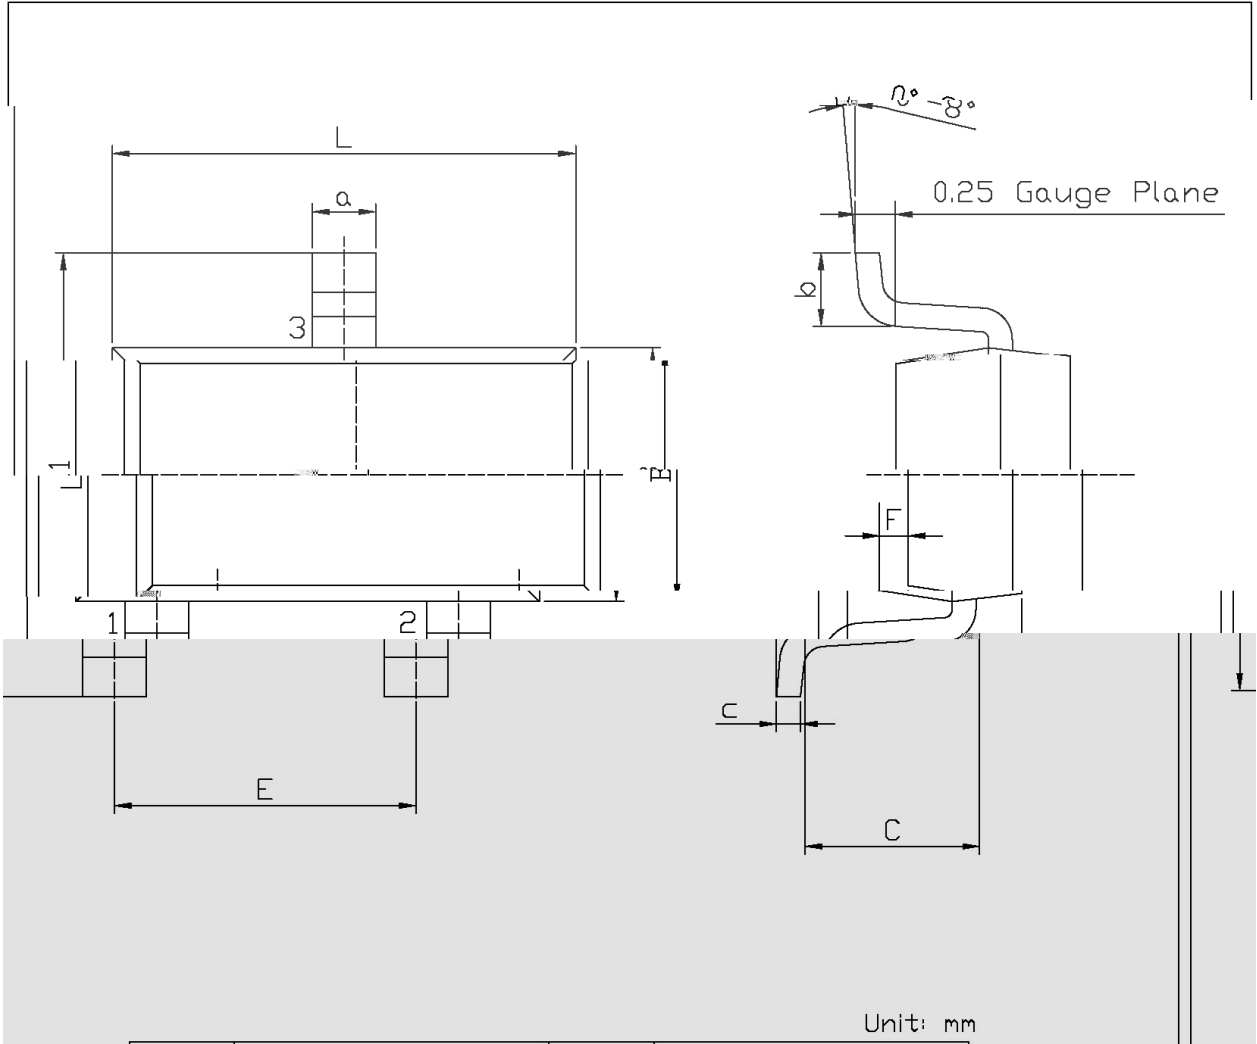


Unit: mm

Dimension	Symbol	Value
Lead thickness	F	0.25
Lead width	C	0.50
Lead angle		2°-8°
Lead length		2.00
Lead pitch		2.82

/ Marking Instructions

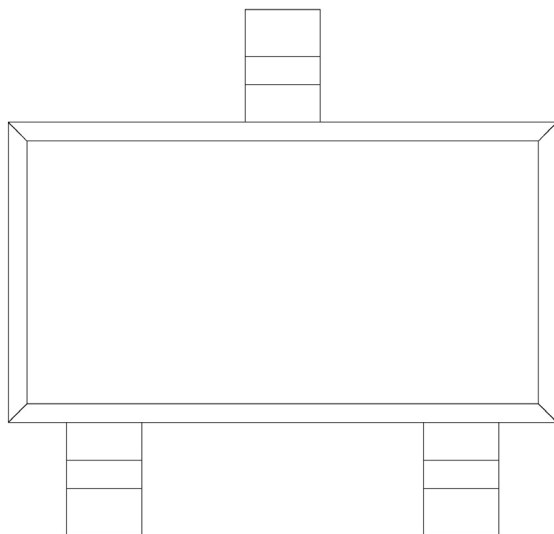

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

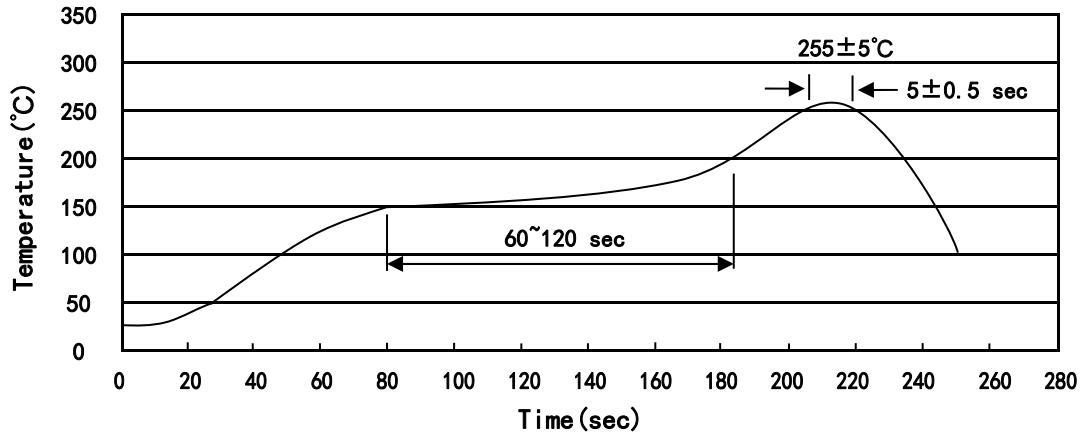

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices