


/ Descriptions

/ Features


/ Applications

DC/DC

/ Equivalent Circuit










/ Pinning

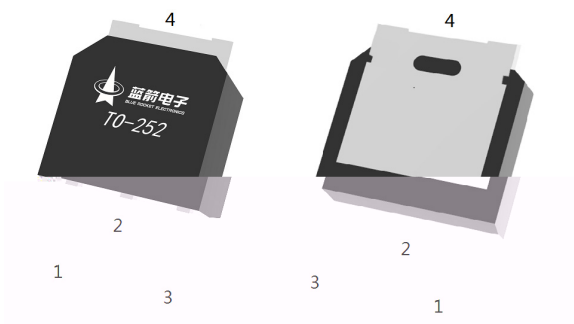


/ Marking

/ Electrical Characteristic Curve

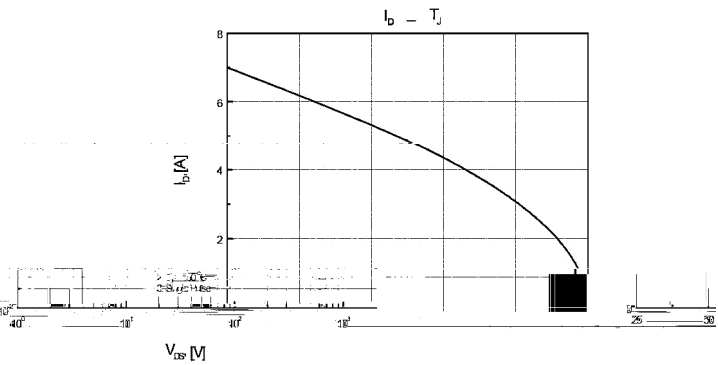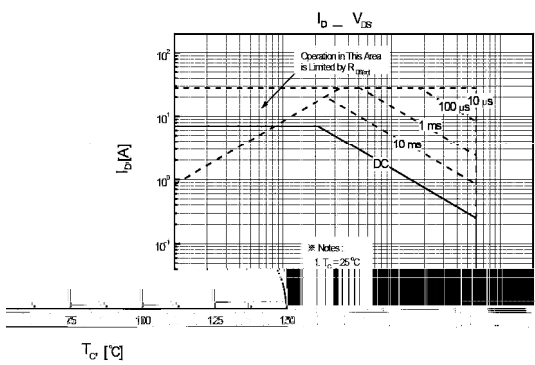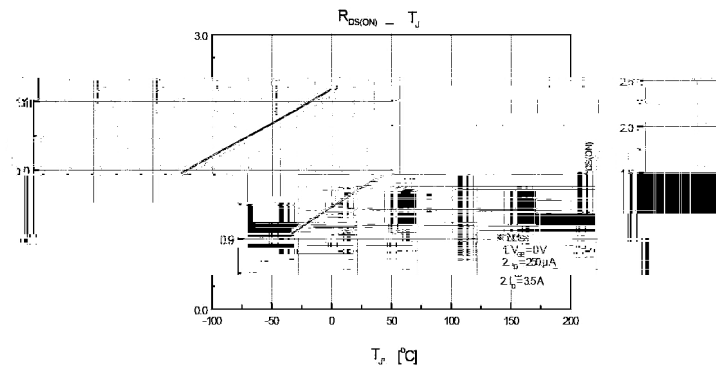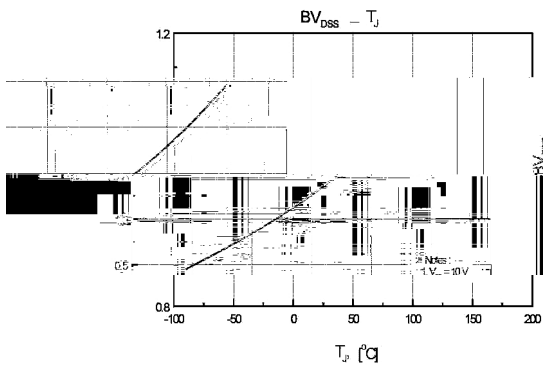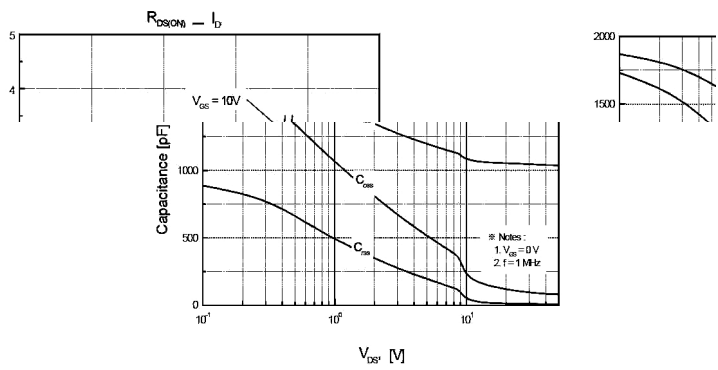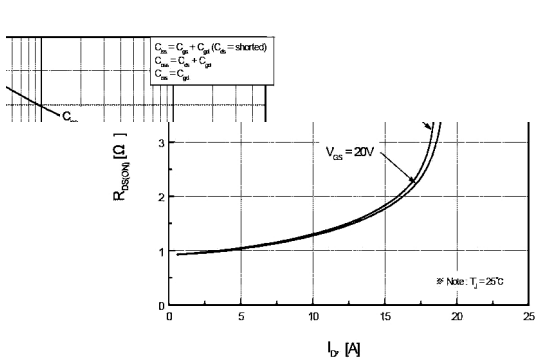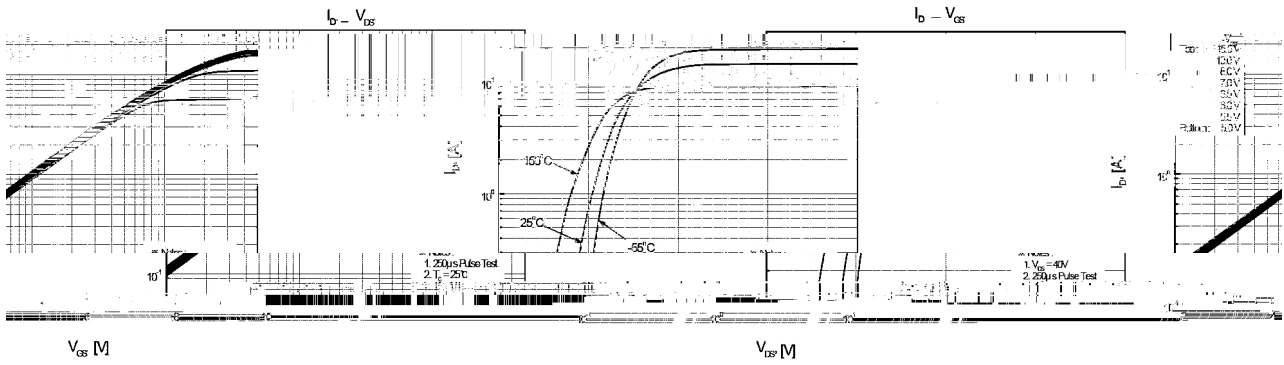


BRD7N65

/ Marking Instructions

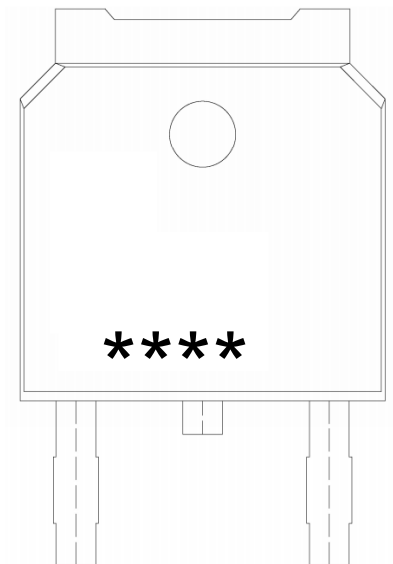

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

7HP SHUDW XUH

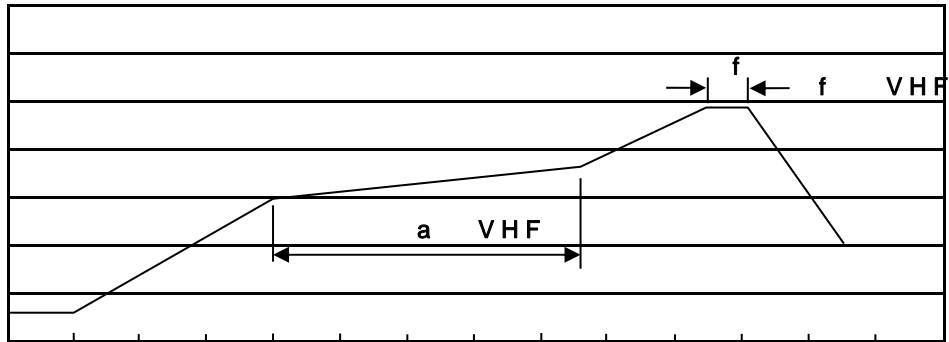

7LPH VHF

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

7>û ~ E	;>û iH					;>û p .			Æ
	Units/Reel / --	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç	
						S			

7>û ~ E	;>û iH					;>û p .			Æ
	Units/Tube /•1x	Tubes/Inner Box •1x /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Tube•1x	Inner Box	Outer Boxç	

/ Notices