


/ Descriptions

650V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



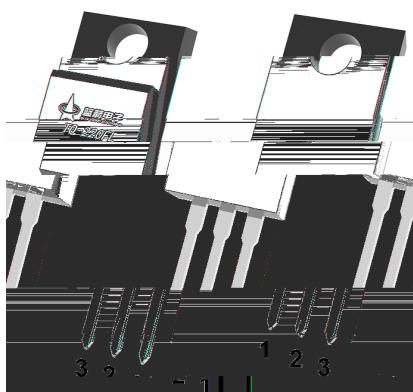


/ Marking

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

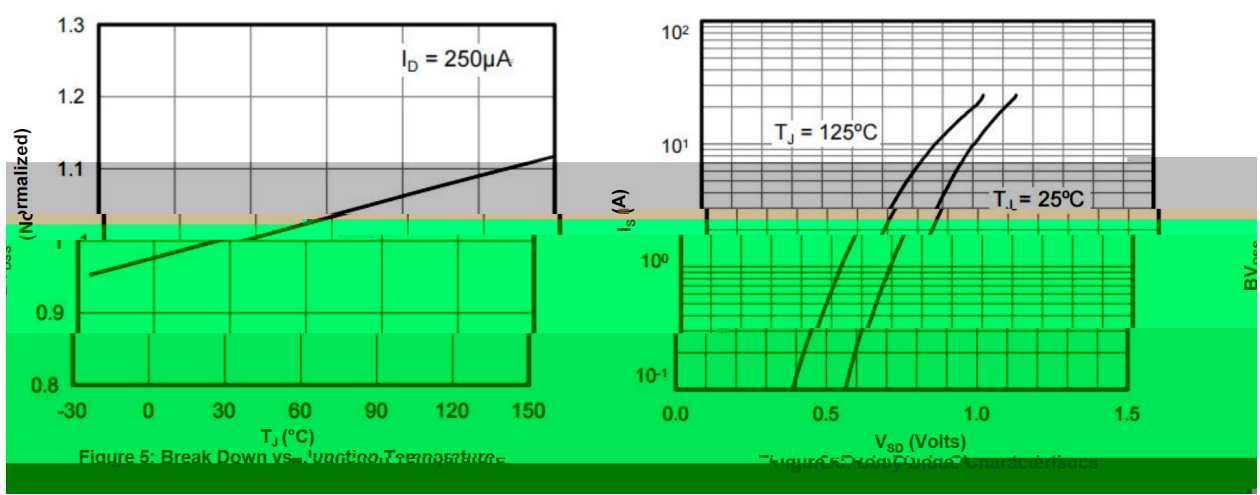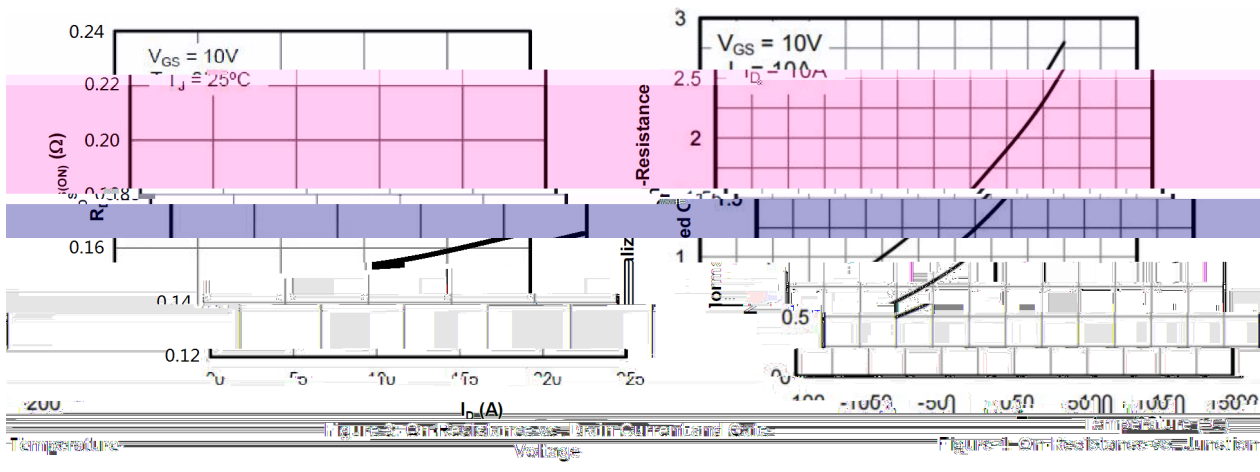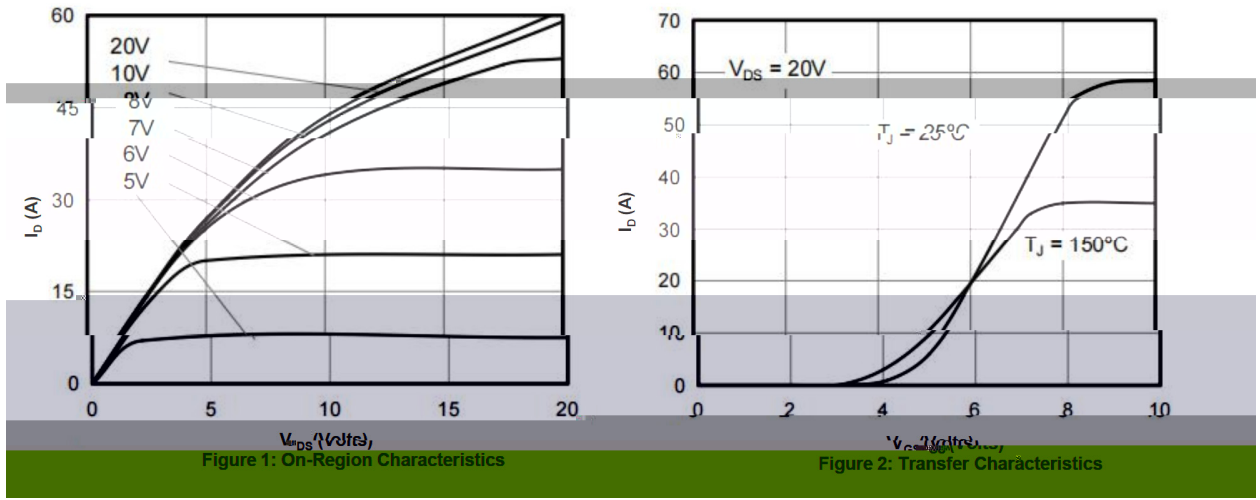

/ Electrical Characteristic Curve

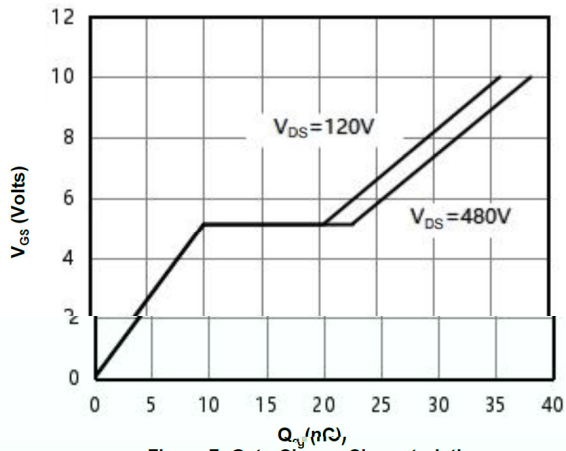


Figure 7: Gate Charge Characteristics

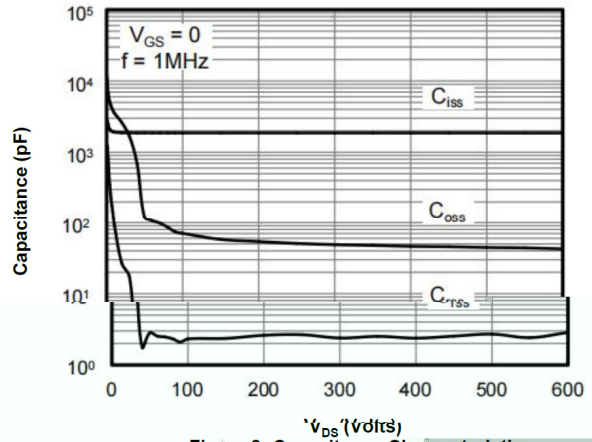


Figure 8: Capacitance Characteristics

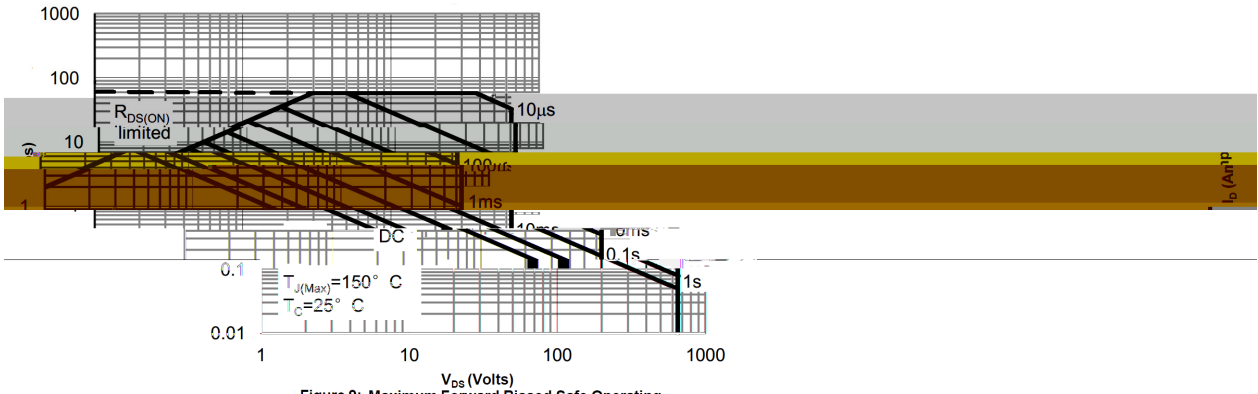


Figure 9: Maximum Forward Biased Safe Operating Area

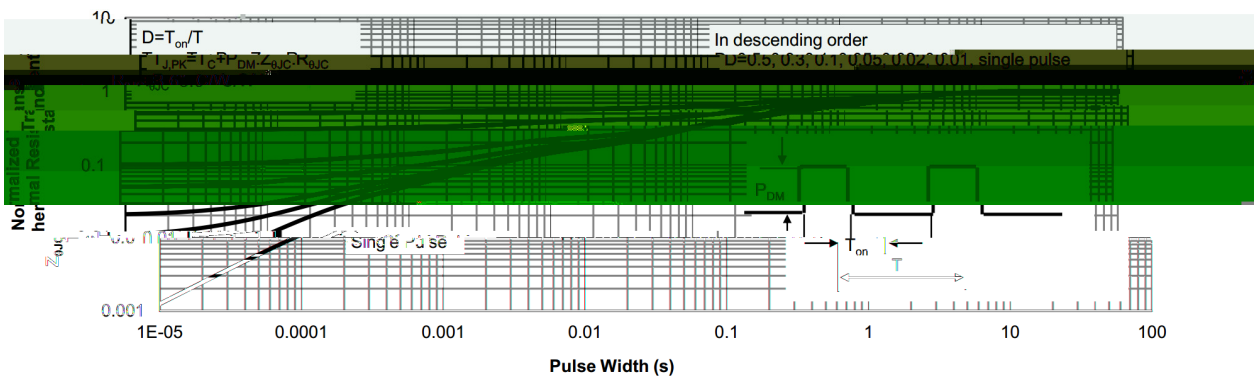



Figure 10: Normalized Maximum Transient Thermal Impedance

BRFL65R180T




DATA SHEET

/ Marking Instructions

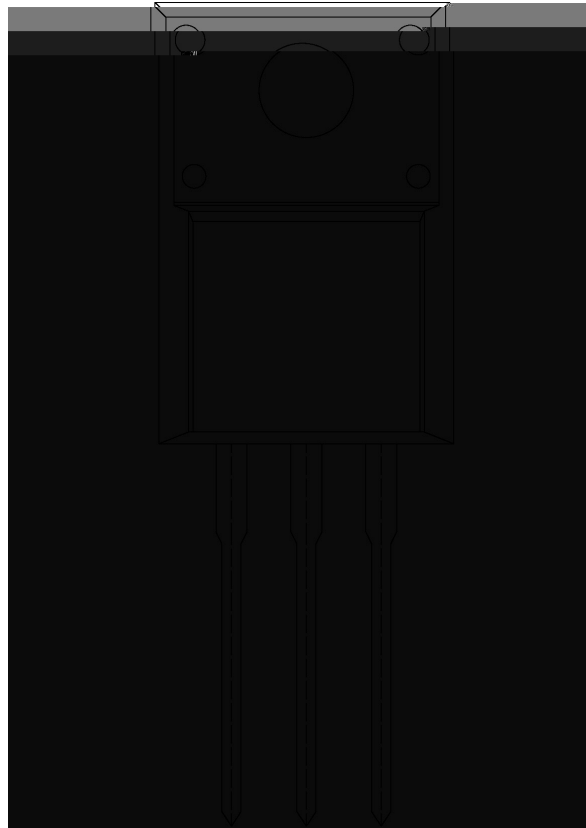

() / Temperature Profile for Dip Soldering(Pb-Free)

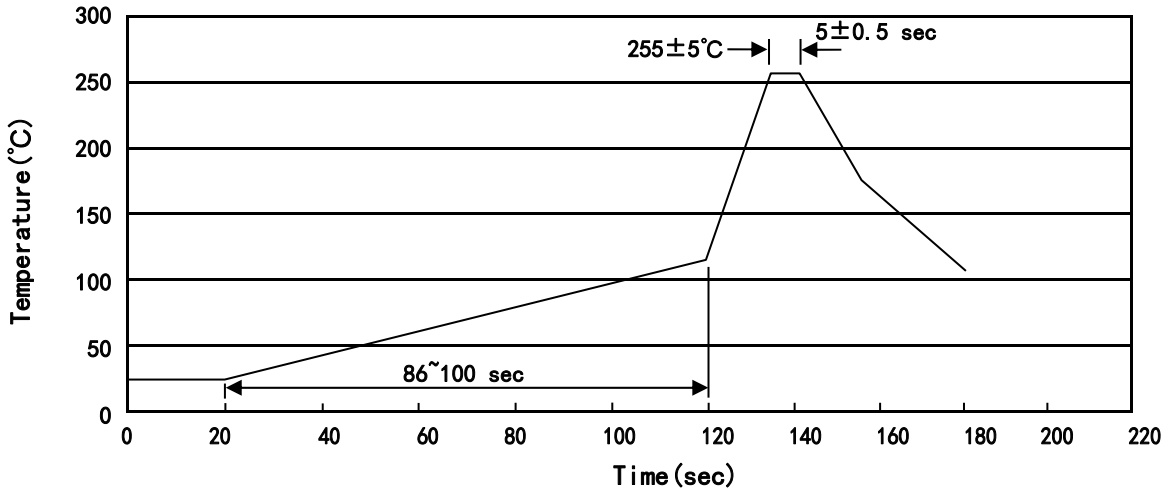

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱

/ Notices