


/ Descriptions

650V


/ Features

/ Applications

/ Equivalent Circuit






/ Pinning

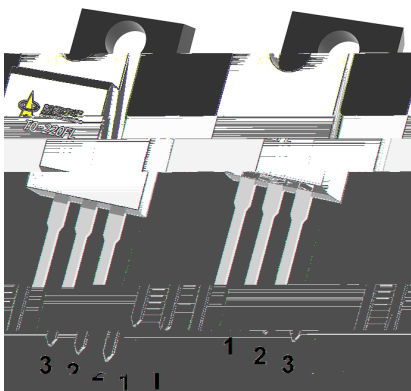

/ Marking

BRFL65R190T

/ Electrical Characteristic Curve

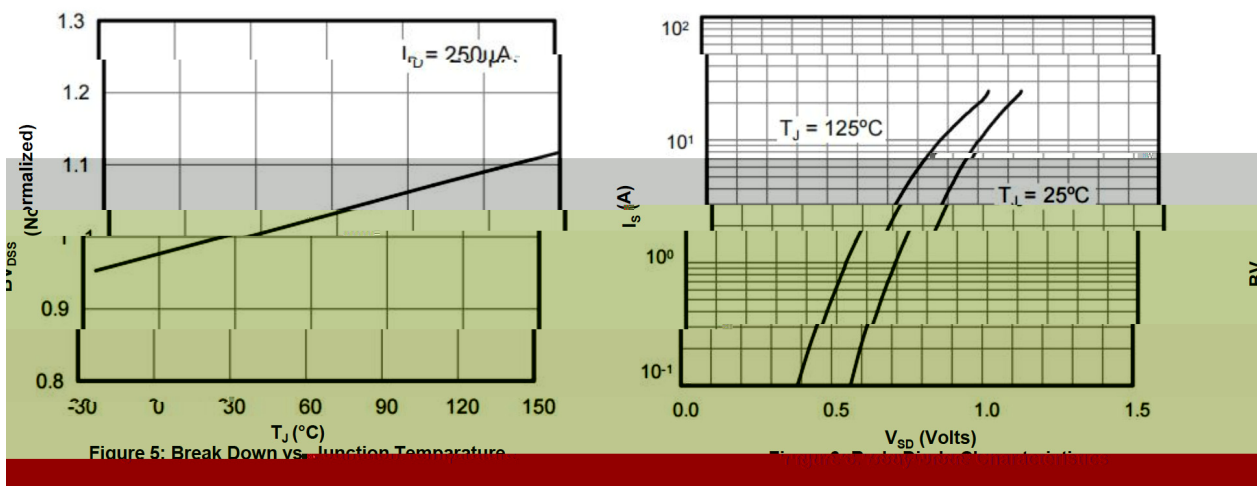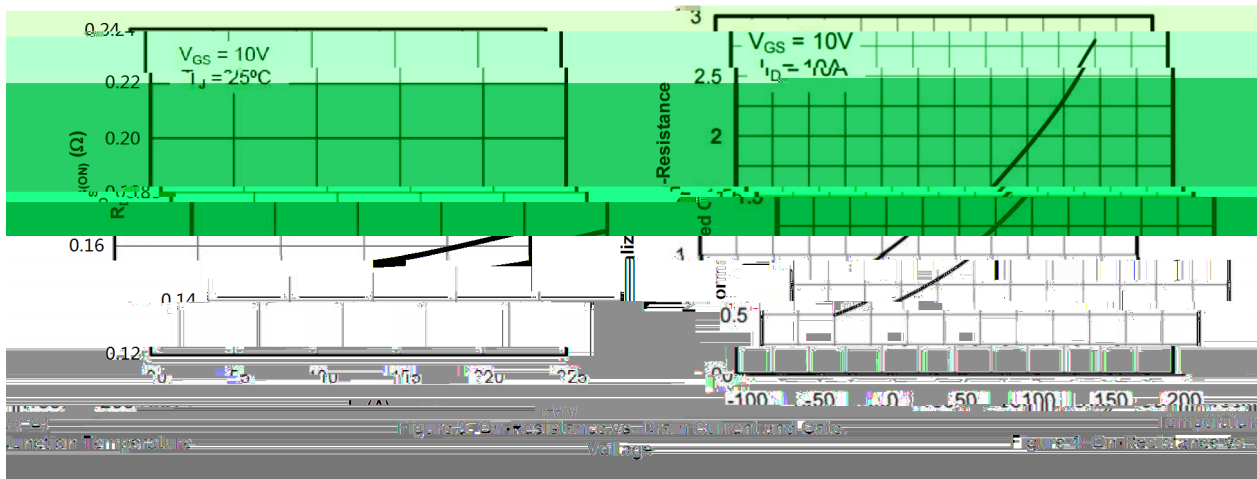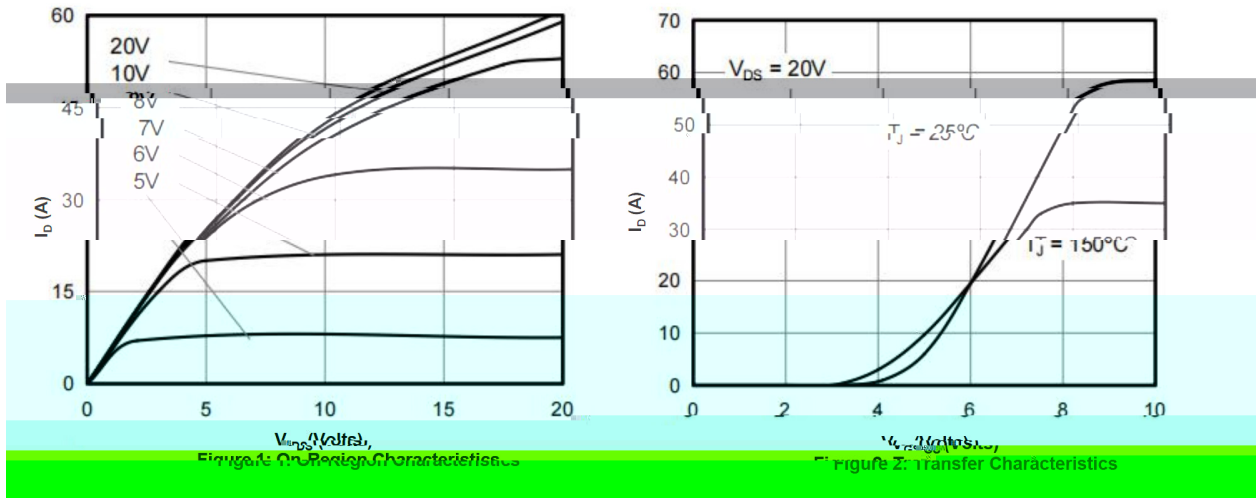

/ Electrical Characteristic Curve

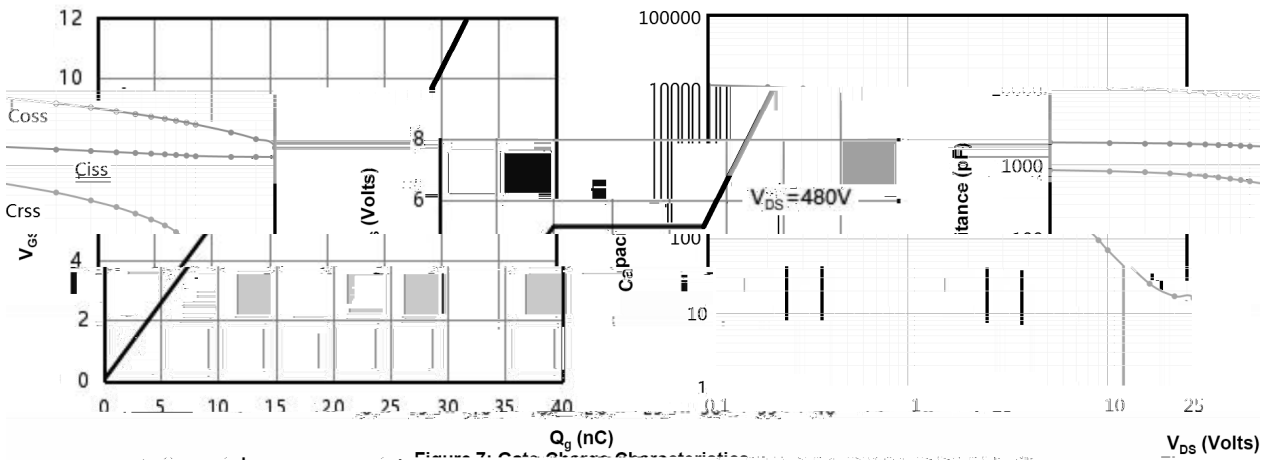


Figure 7: Gate Charge Characteristics

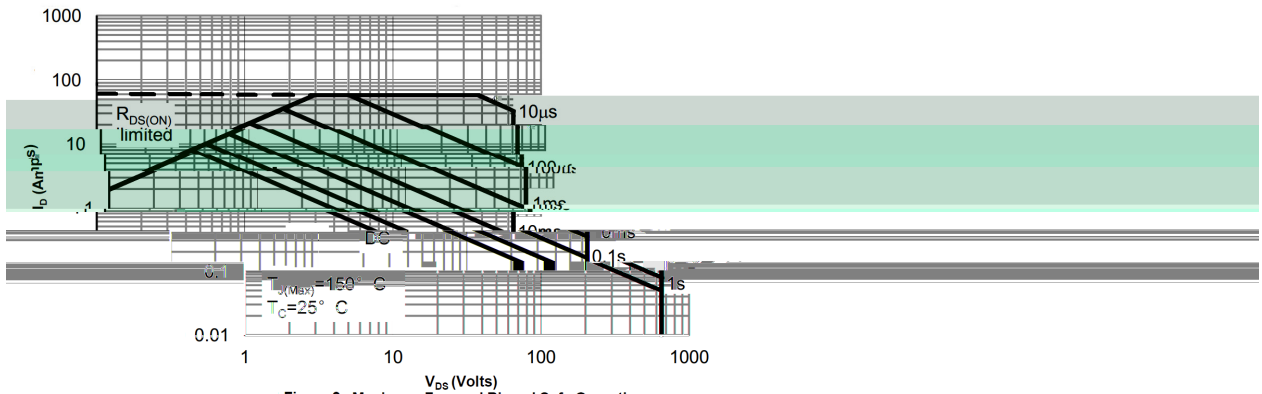


Figure 8: Maximum Forward Biased Safe Operating Area

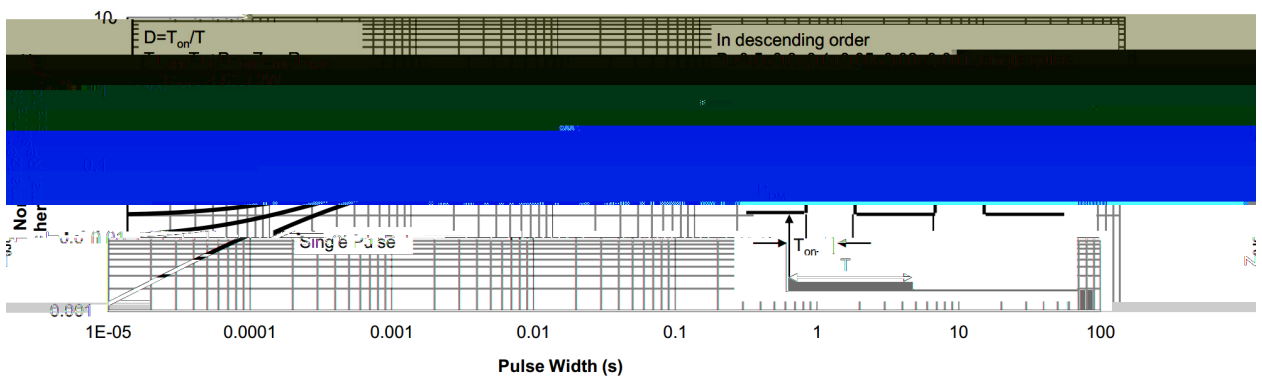


Figure 10: Normalized Maximum Transient Thermal Impedance

BRFL65R190T




DATA SHEET

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

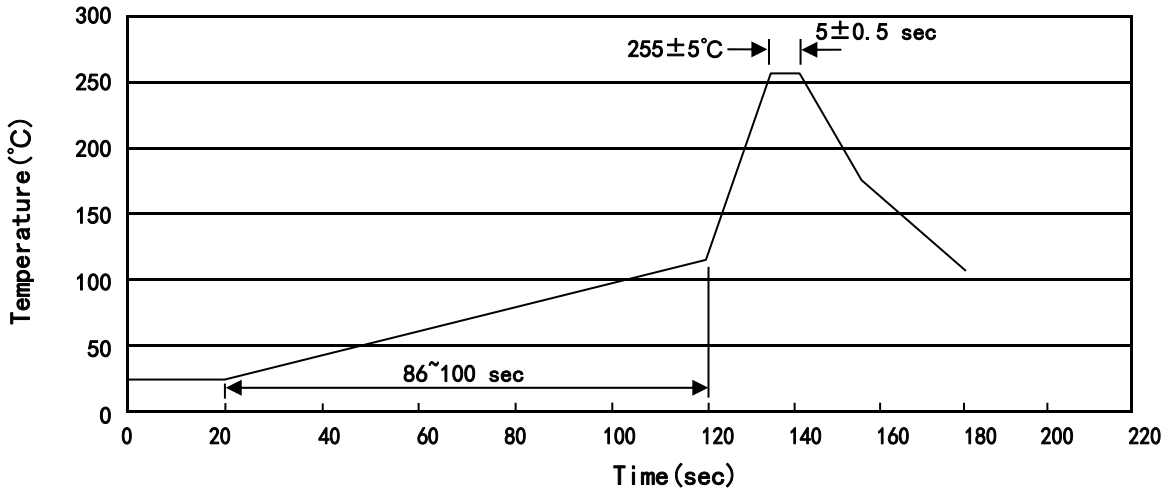

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices