


/ Descriptions

/ Features


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning

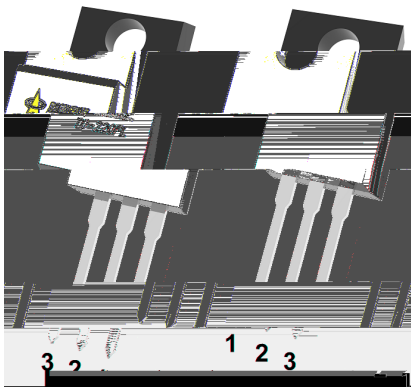








/ Marking

/ Absolute Maximum Ratings(Ta=25)

	°C		
	°C		
	°C		

		μ				
						μ
		$^{\circ}\text{C}$				μ
		μ				
						Ω

/ Electrical Characteristic Curve

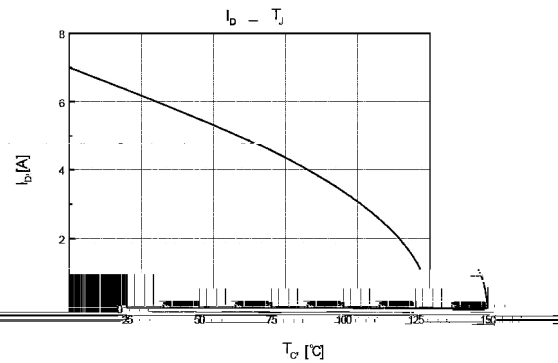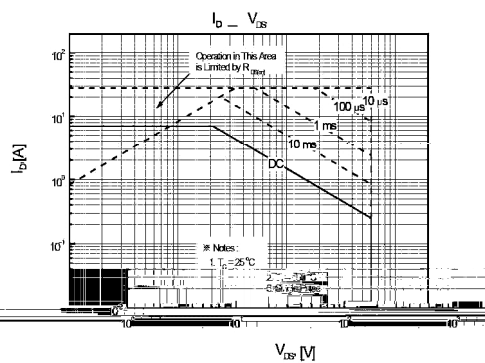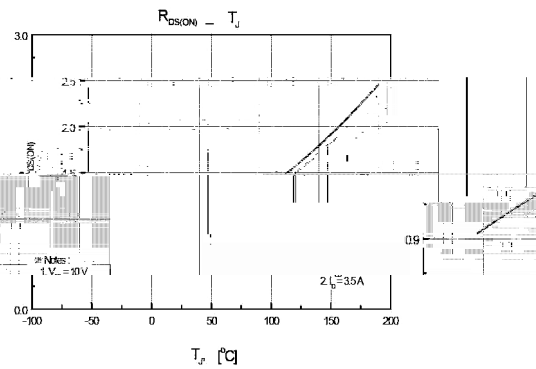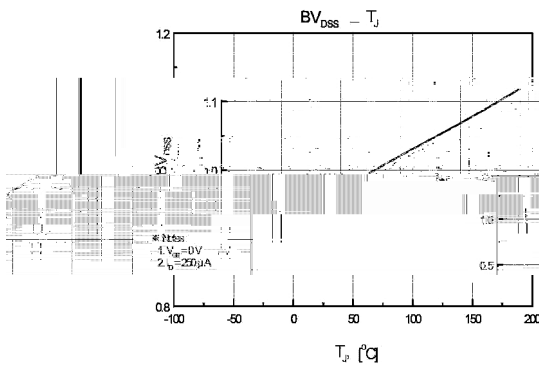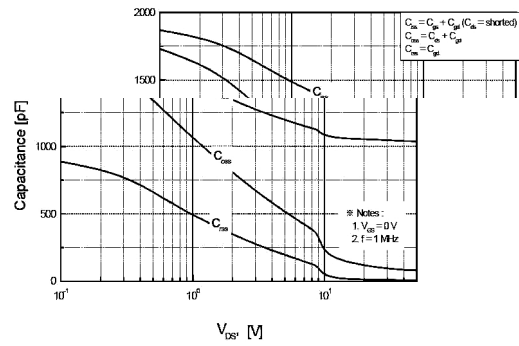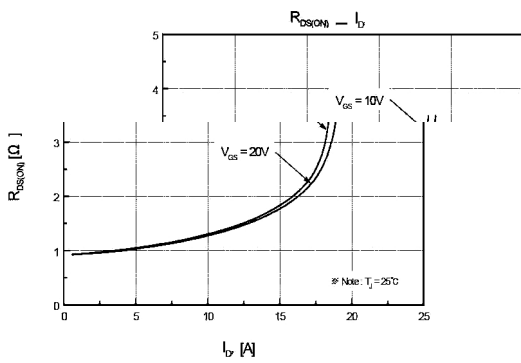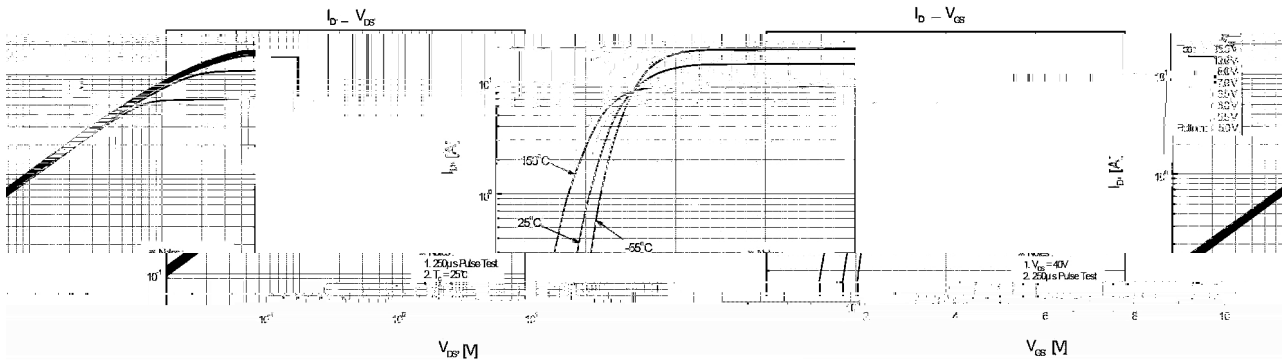


BRFL7N65

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

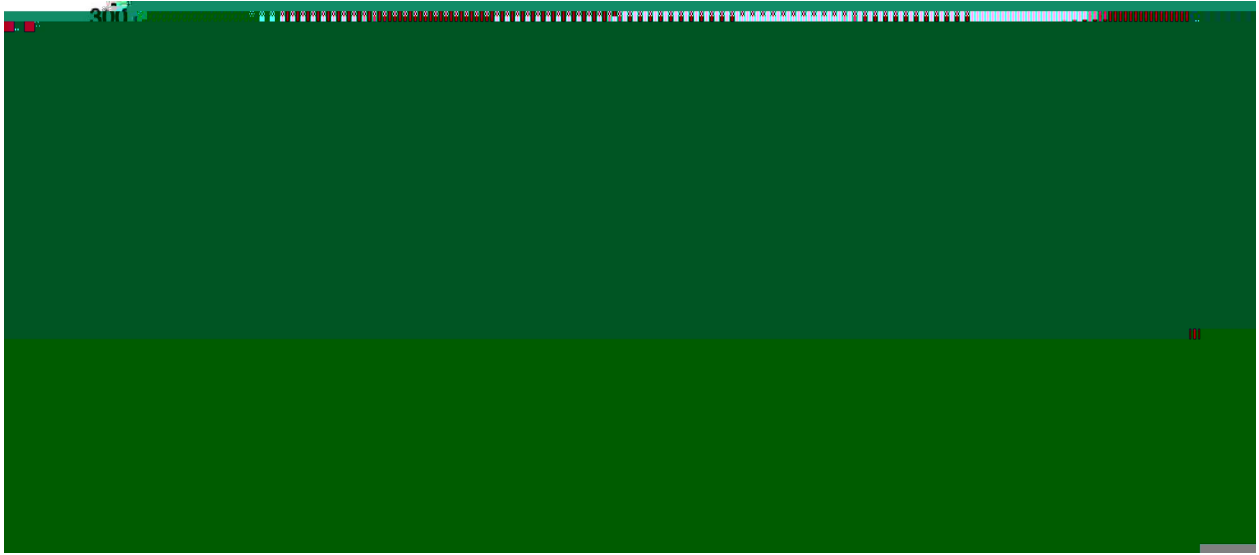

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices