

/ Descriptions


KF \$) +.

/ Features

I f? J

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking



/ Absolute Maximum Ratings(Ta=25)

°C			
°C			
°C			
		~	





BRGH25N120D

DATA SHEET






		Ω				




/ Electrical Characteristic Curve

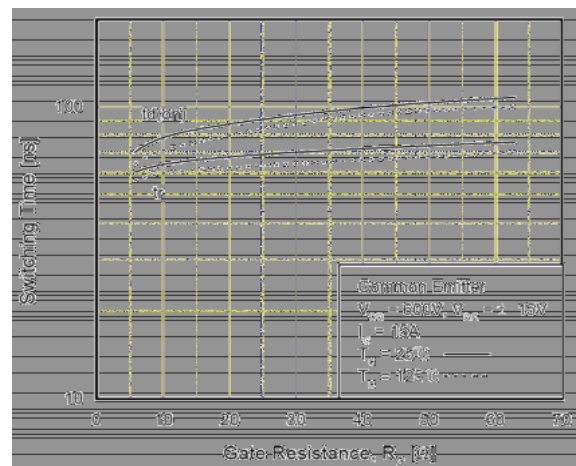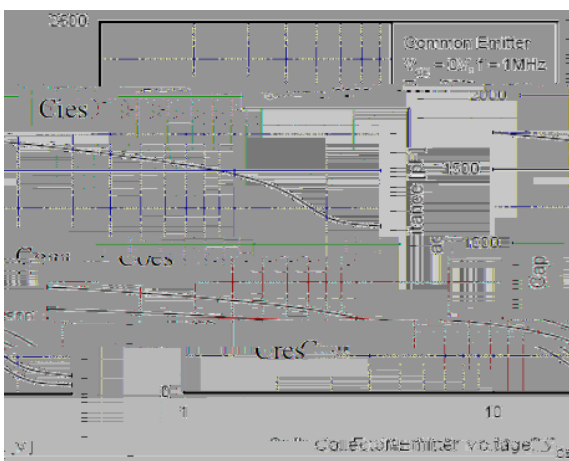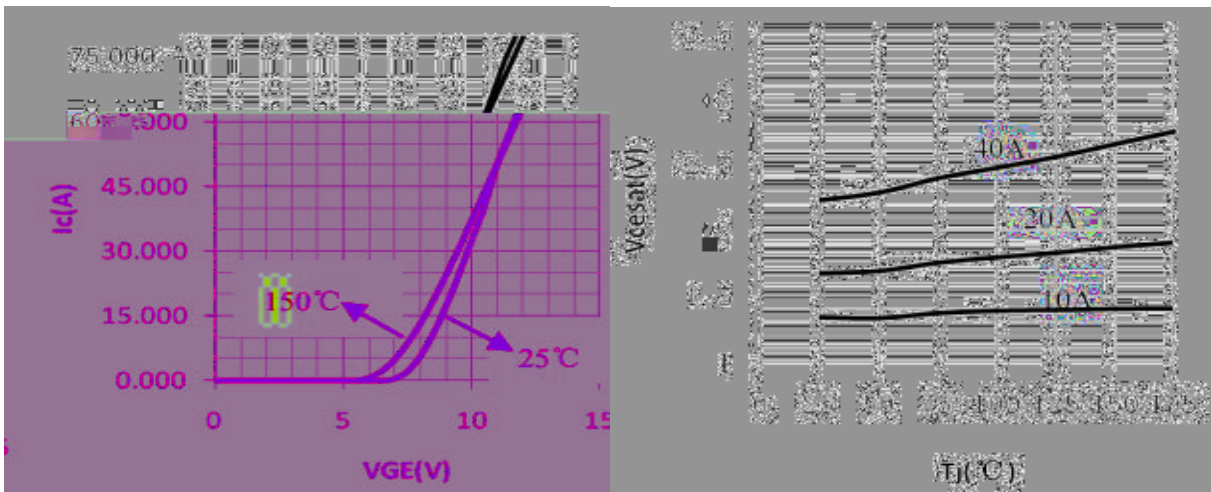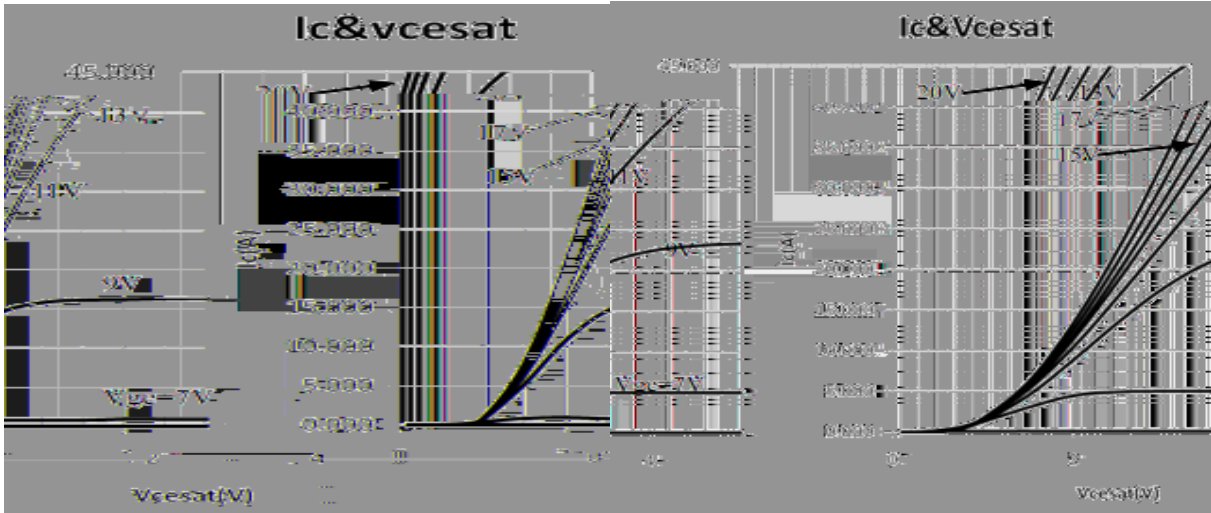


/ Electrical Characteristic Curve

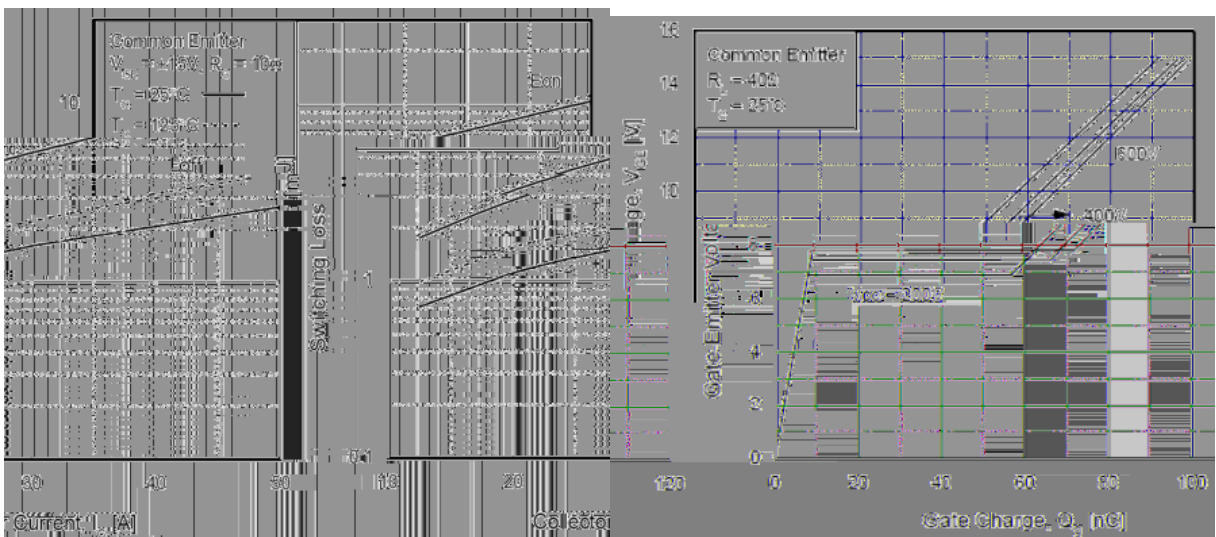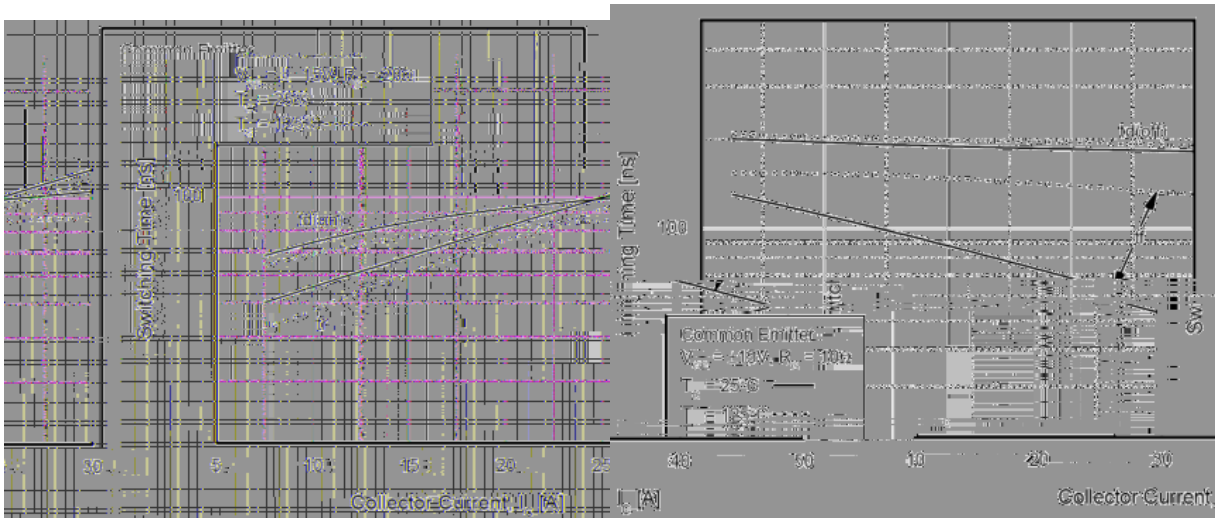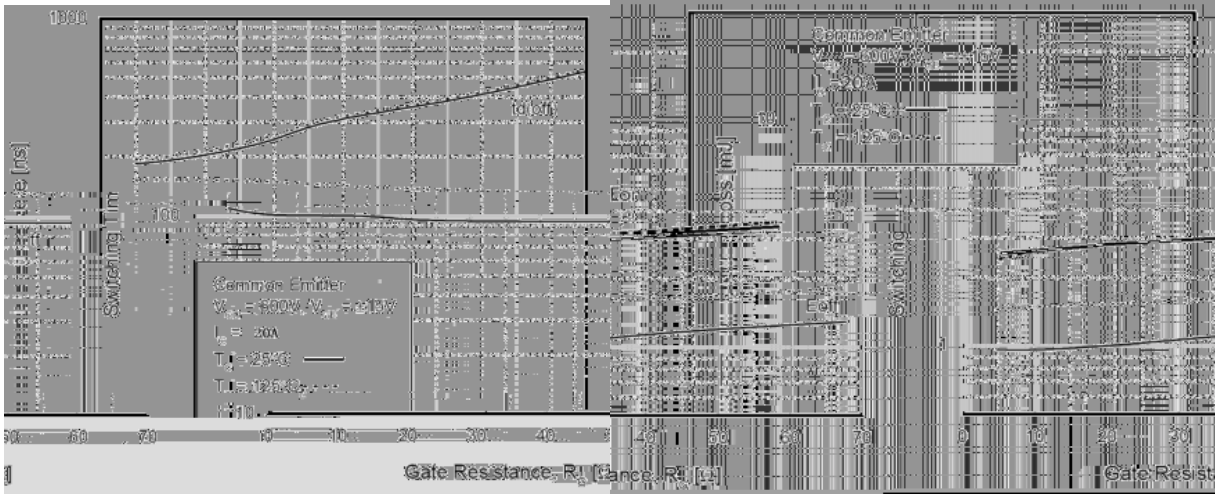


/ Electrical Characteristic Curve

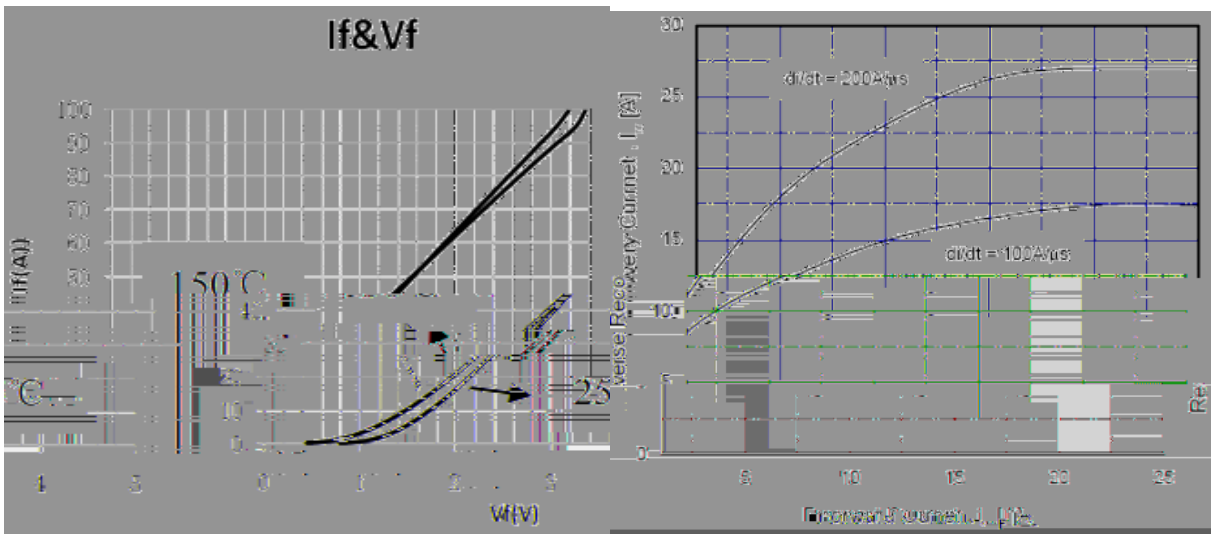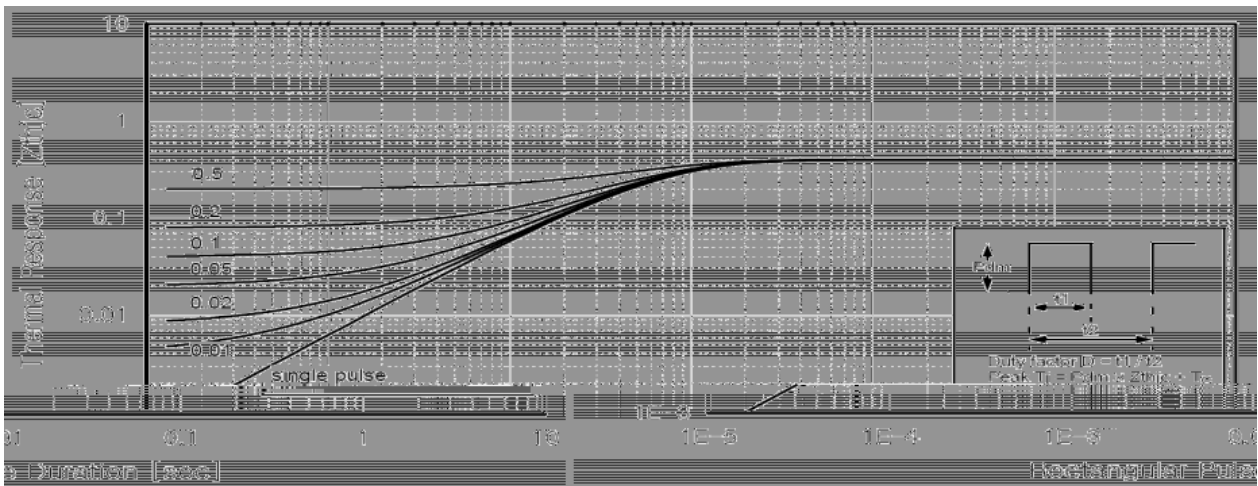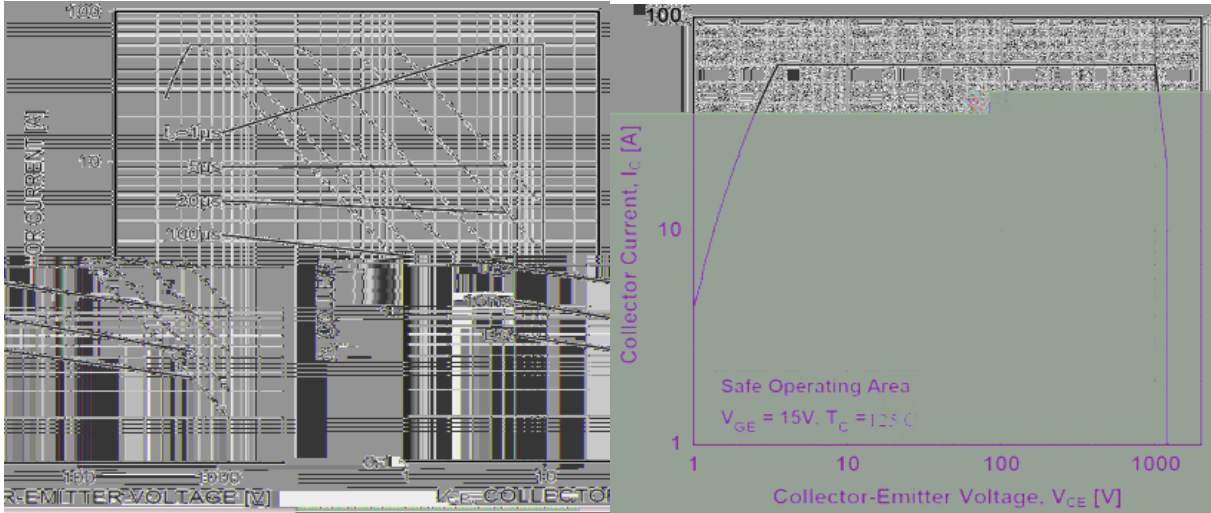


/ Electrical Characteristic Curve

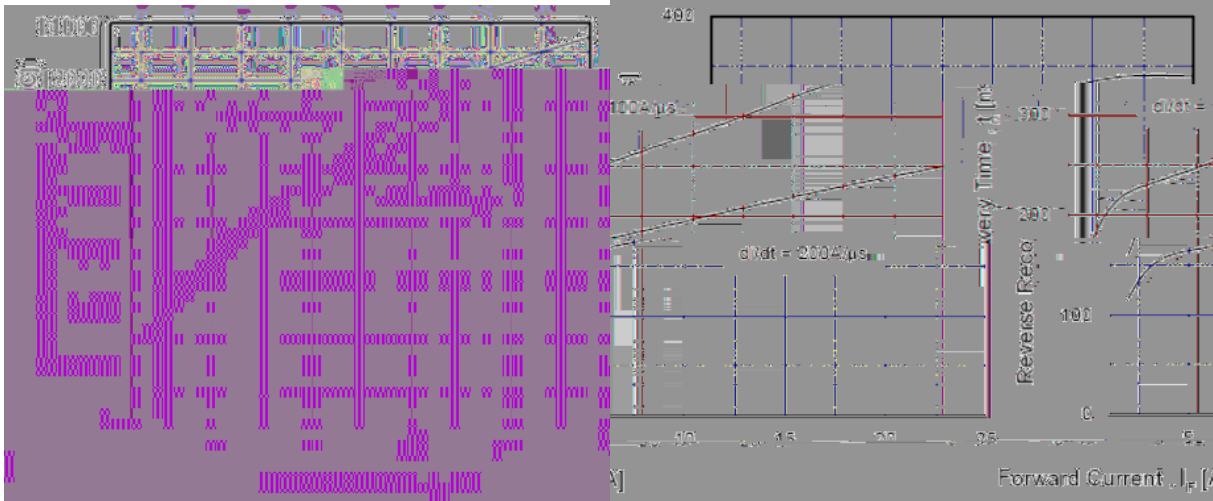

/ Package Dimensions

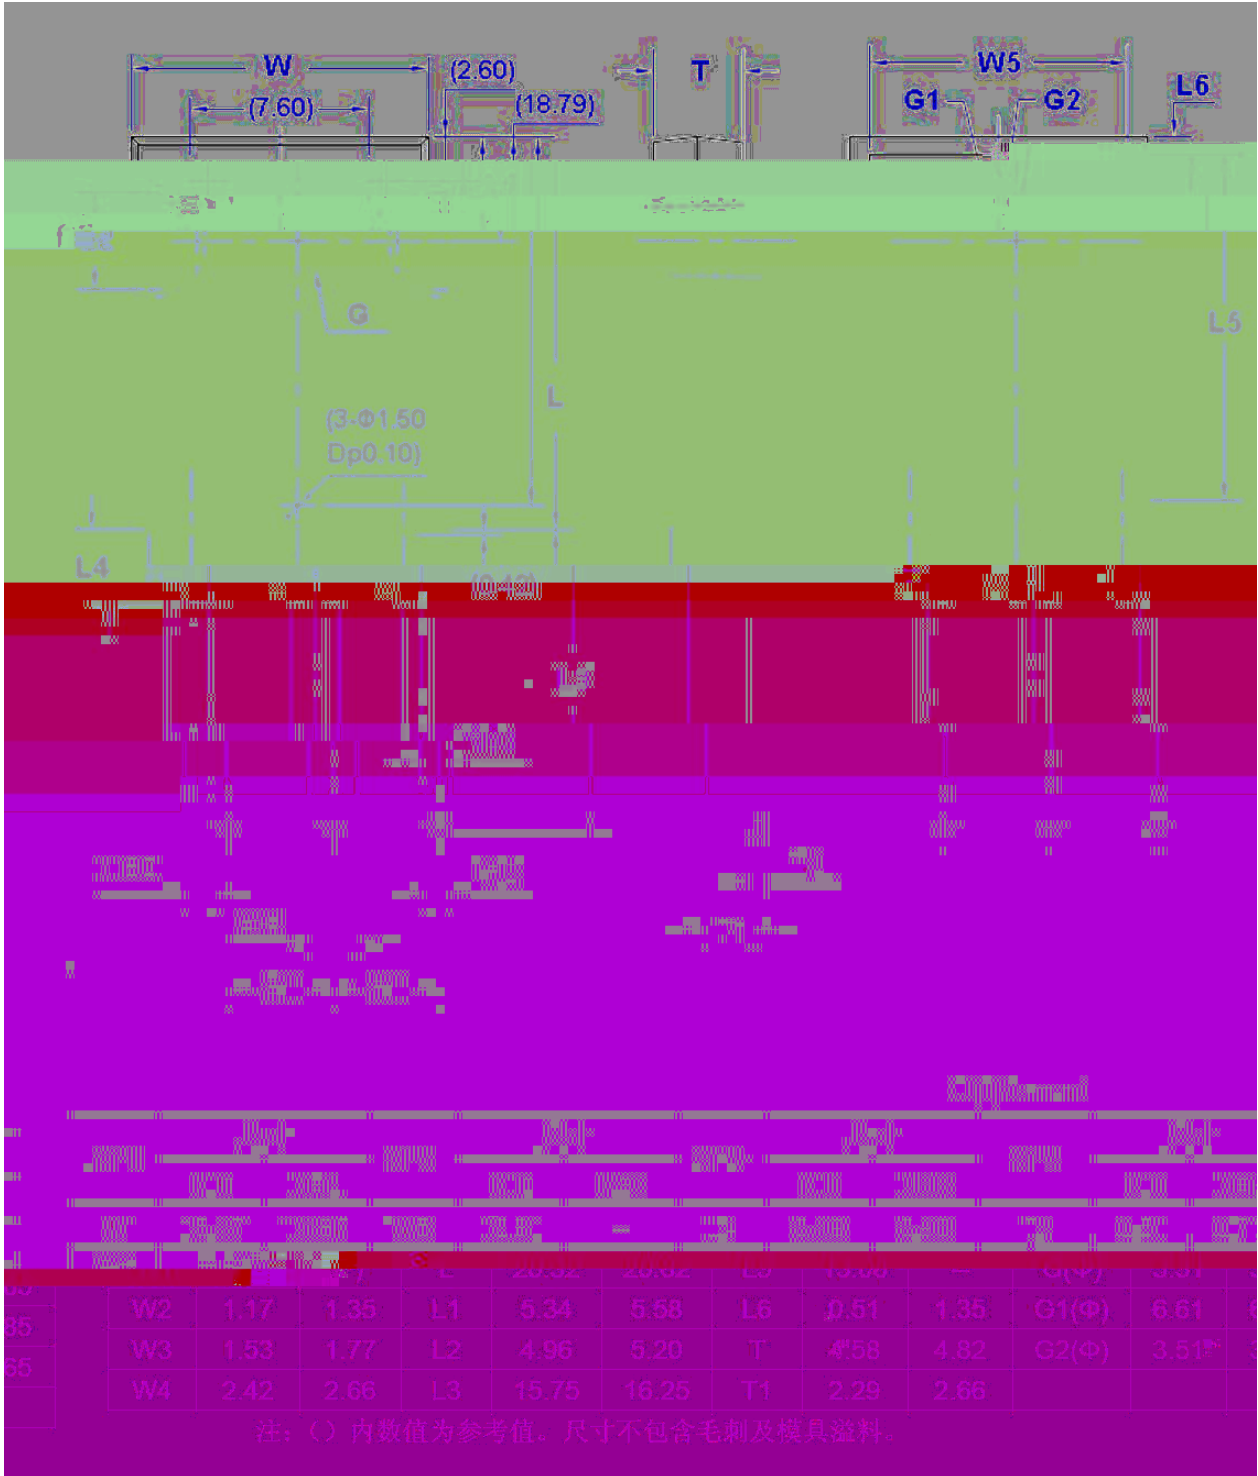


/ Marking Instructions

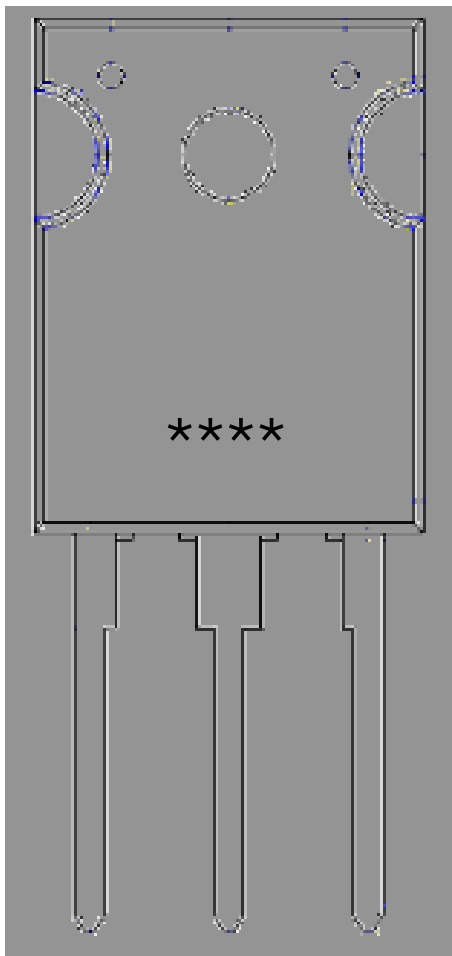

91 1
>, E ();
!!!!

() / Temperature Profile for Dip Soldering(Pb-Free)

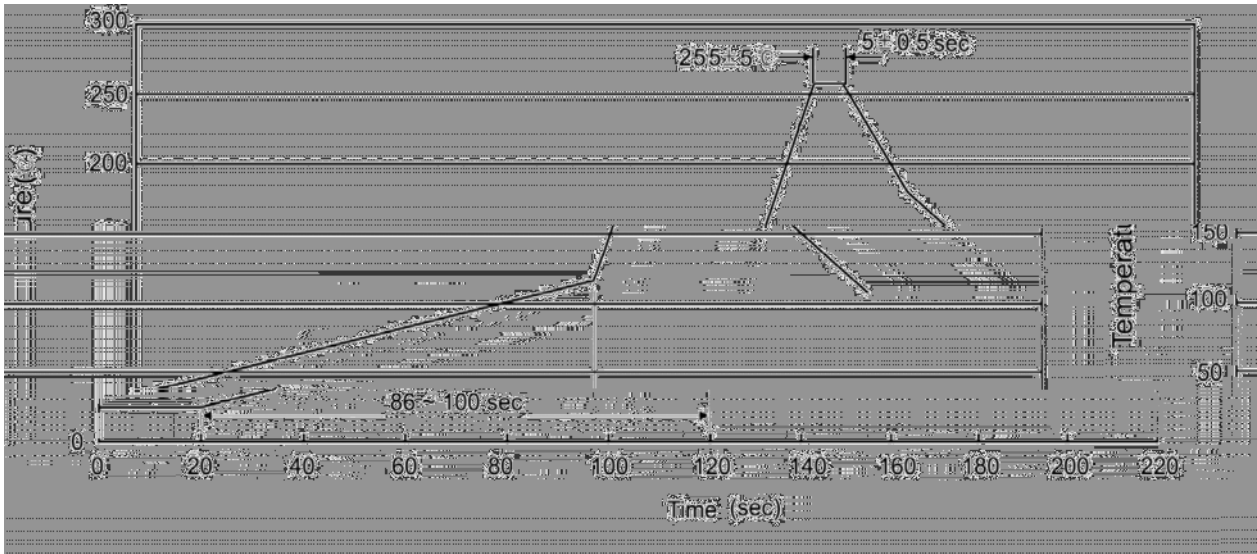

... ..

/ Resistance to Soldering Heat Test Conditions

... ..

/ Packaging SPEC.

Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
------------	-----------------	-----------------	-----------------------	-----------------	------	-----------	-----------