






/ Absolute Maximum Ratings(Each Transistor,Ta=25)


			°C
		~	°C

/ Electrical Characteristics((Each Transistor,Ta=25)





/ Electrical Characteristic Curve

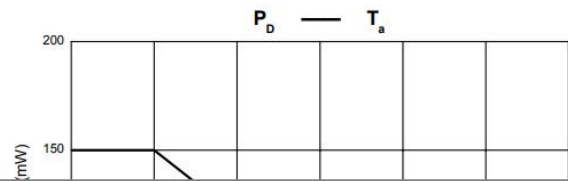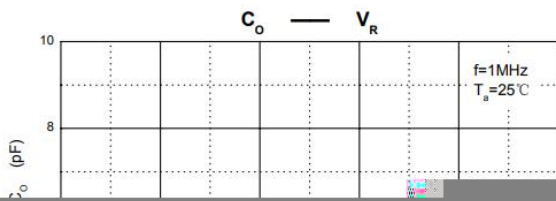




/ Package Dimensions

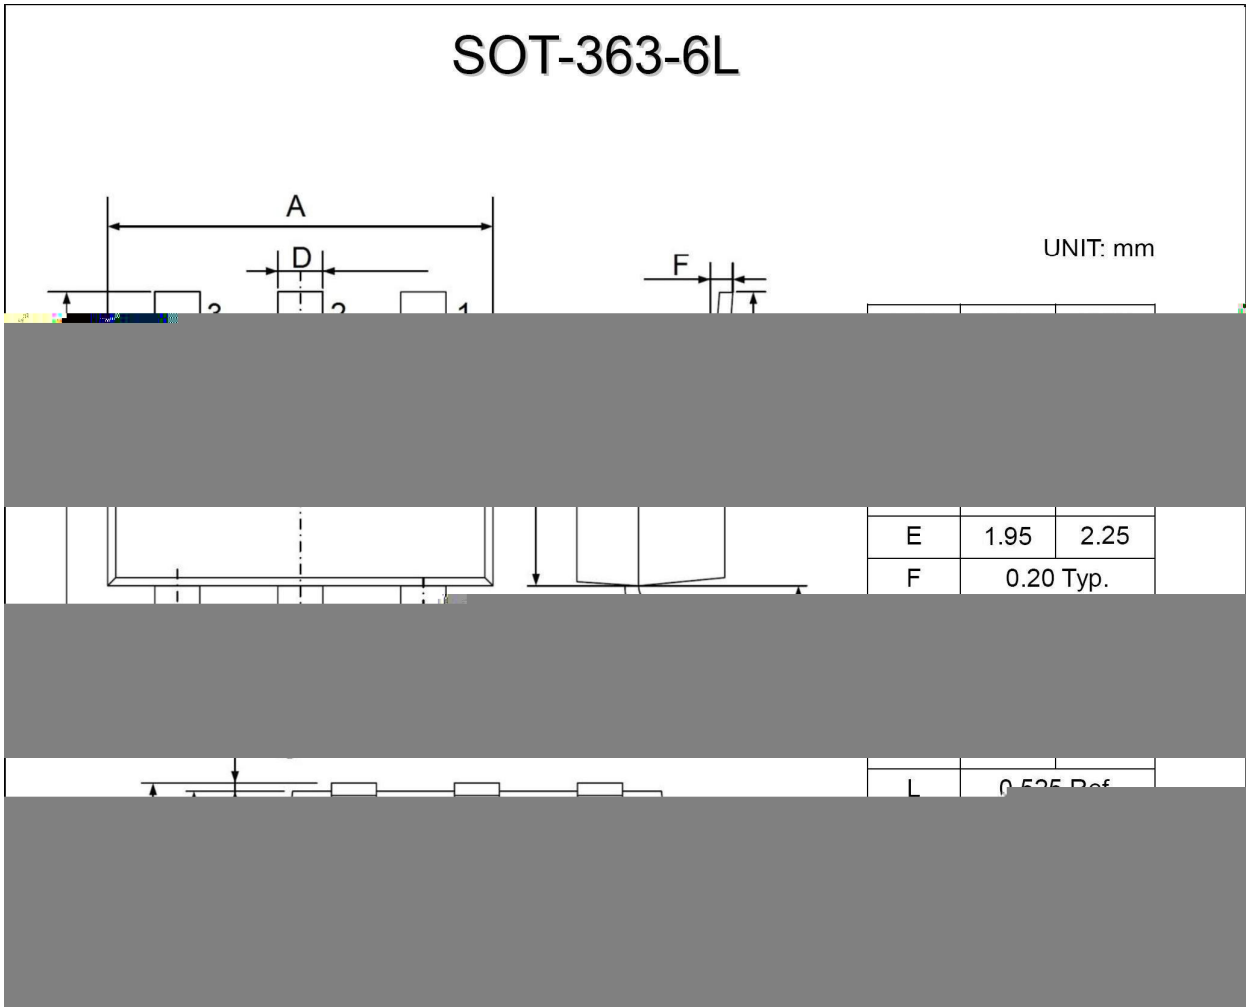



/ Marking Instructions

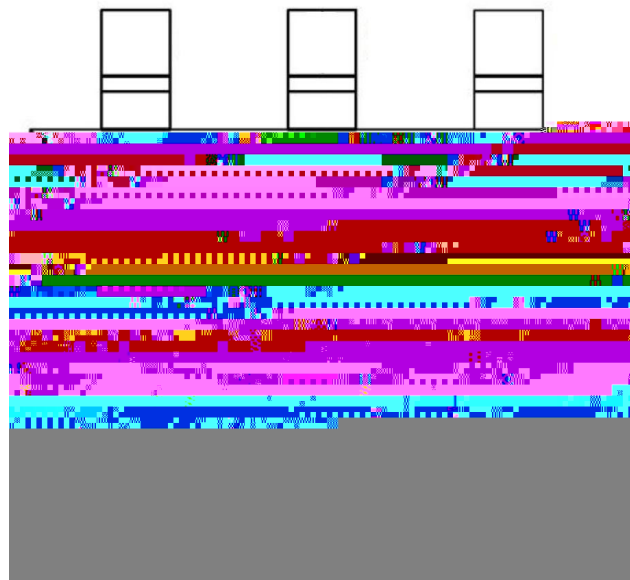

● " 1"


H211

***:


● "1" Pin

H211

***:



() /

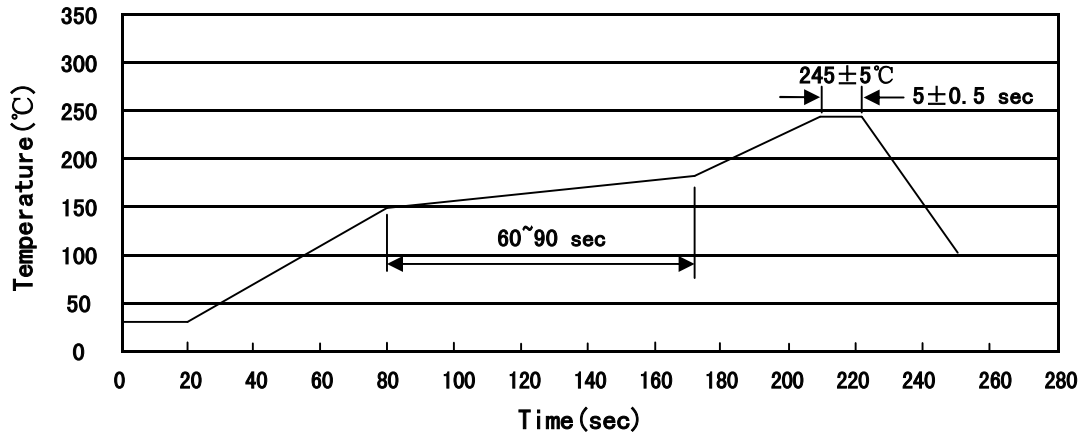

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180,000	7" x8	180x120x180	390x385x205

/ Notices