


/ Revised record

F	2017-4				
G	2020-8-28	1			
A	2022.05.19	ALL			



/ Descriptions

SOT-23 N MOS
N-CHANNEL MOSFET in a SOT-23 Plastic Package.


/ Features

2KV
Sensitive gate trigger current and Low Holding current.ESD protected up to 2KV,HF Product.

/ Applications

Intended for use in general purpose switching and phase control applications.

/ Equivalent Circuit




/ Pinning



PIN 1 G PIN 2 S PIN 3 D

/ Marking



Marking	HSA
---------	-----





Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current – Continuous	I_D	170	mA
Drain Current– Pulsed	$I_D(T_C=25^\circ C)$	680	mA
Continuous Drain–Source	I_S	170	mA
Gate-Source Voltage	V_{GS}	± 20	V



/ Electrical Characteristic Curve


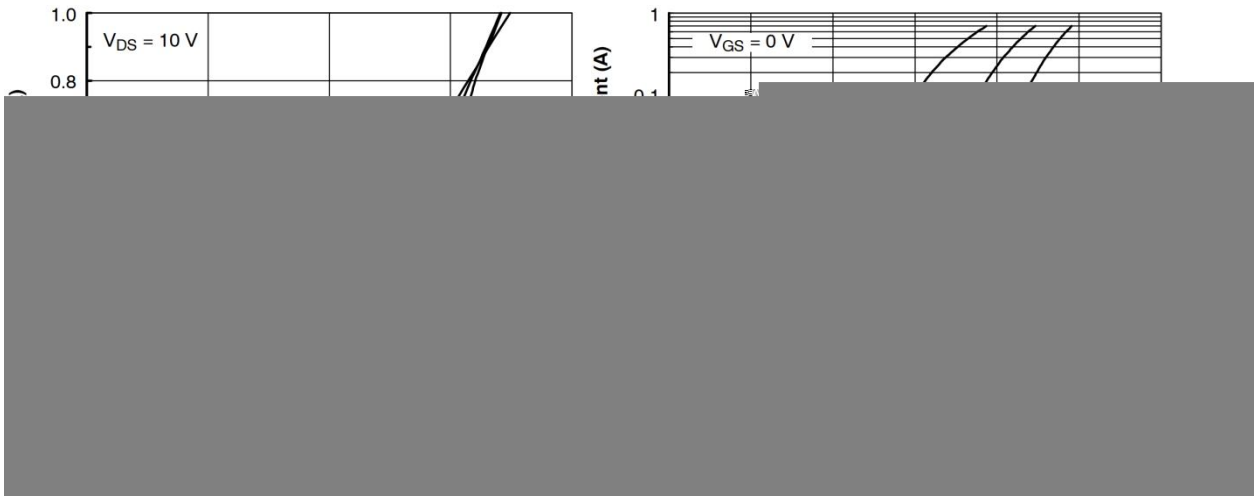
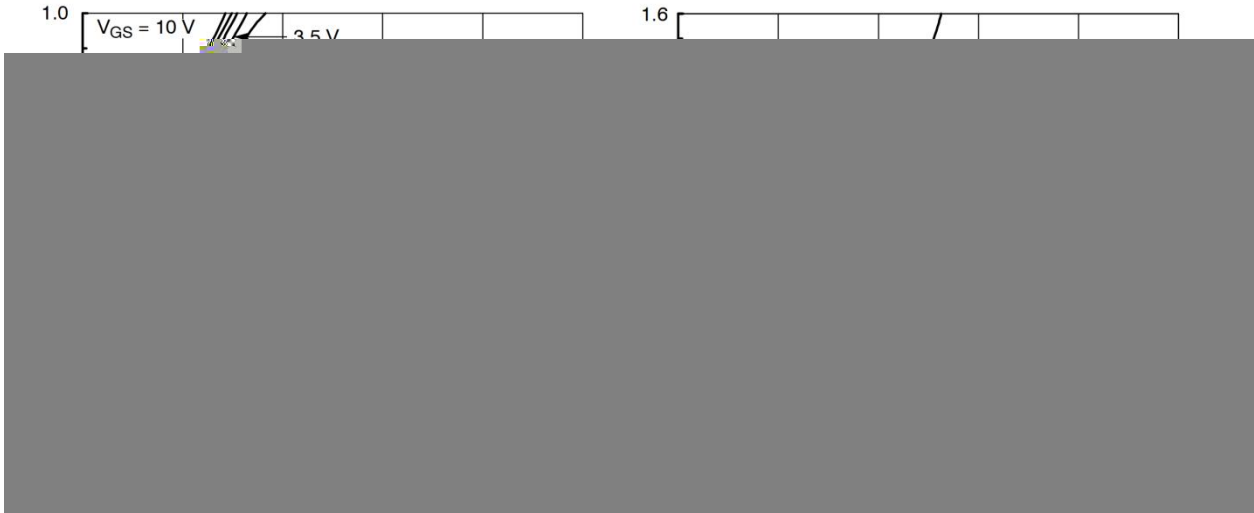


/ Electrical Characteristic Curve

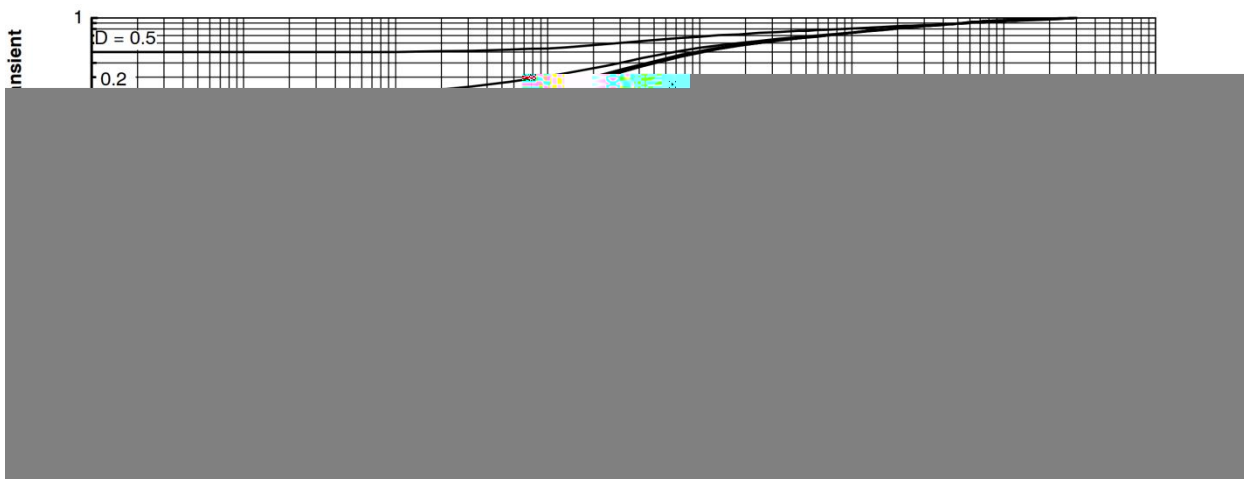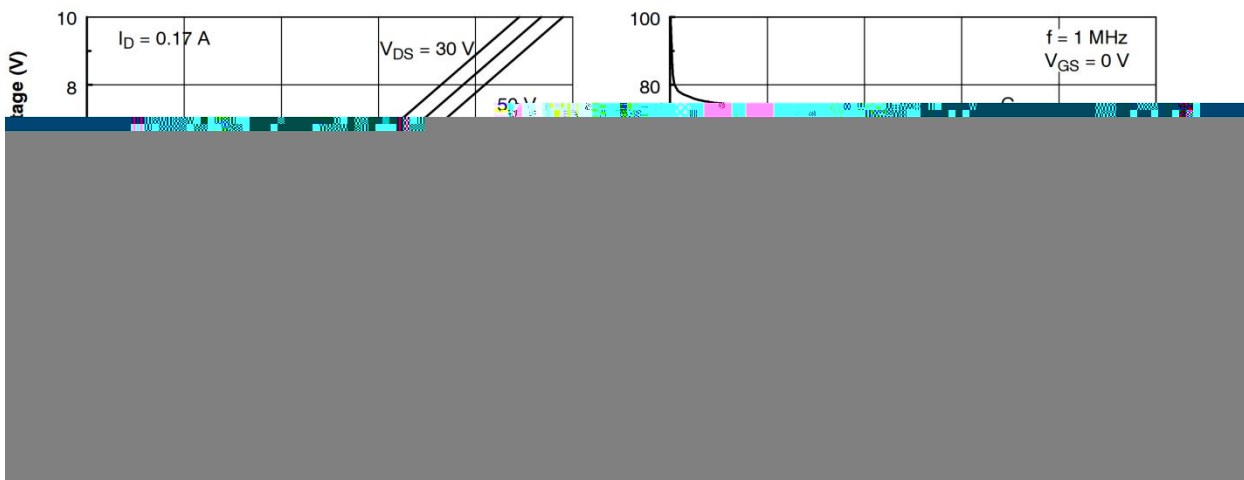




/ Package Dimensions

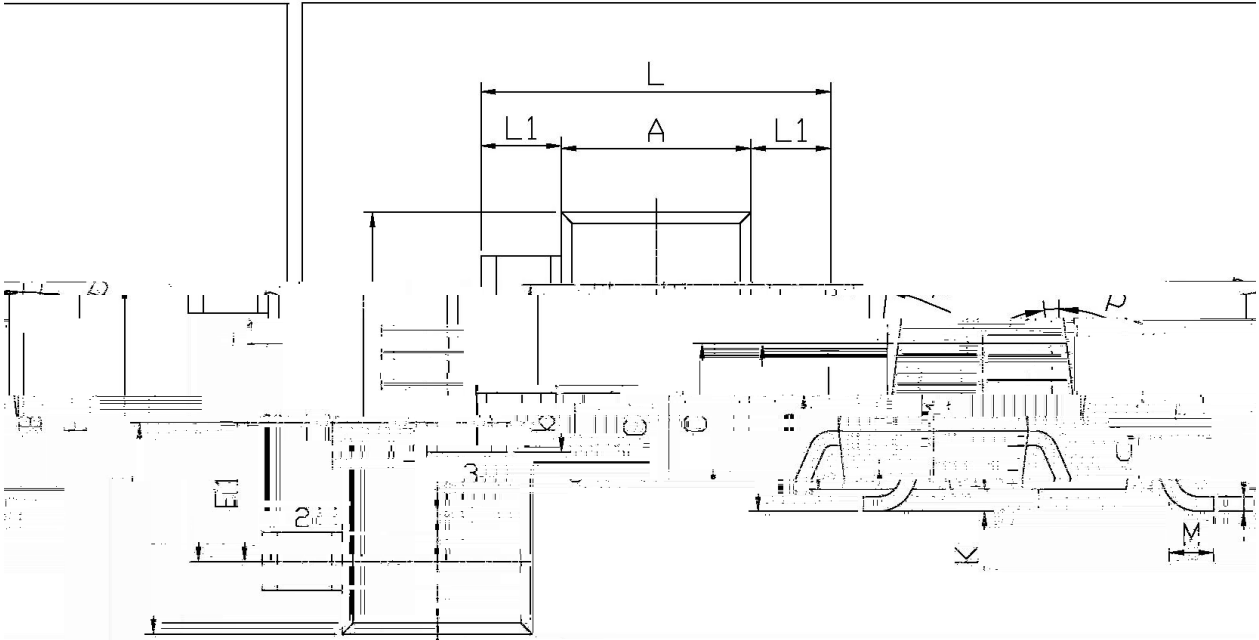

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
	0.45	0.65	K	0.90	1.20
A	1.5	1.50		0.05	0.20
B	2.70	3.10		0.10	
	0.35	0.55			

/ Marking Instructions

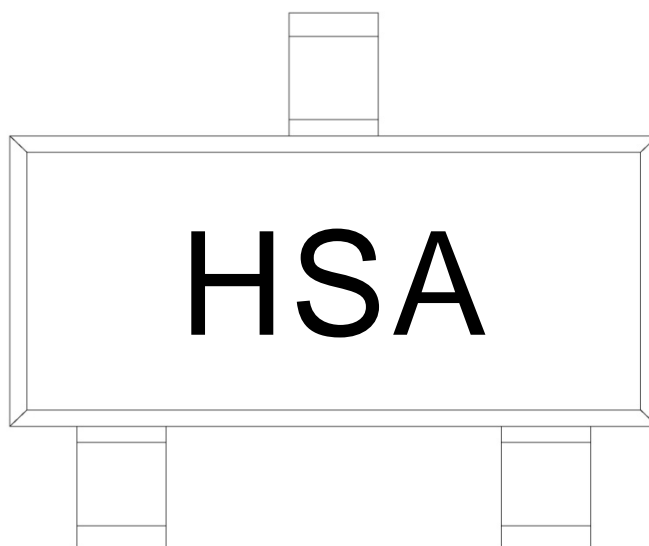


H

SA

Note:

H: Company Code

SA: Product Type



() /

- | | | | | |
|---|---------|-----------|--|--|
| | | | | Note: |
| 1 | 150 180 | 60 90sec; | | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL