

/ Descriptions

20~200V 2.0A

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

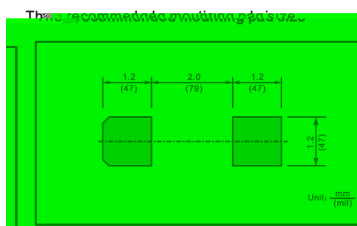


/ Marking

/ Electrical Characteristic Curve

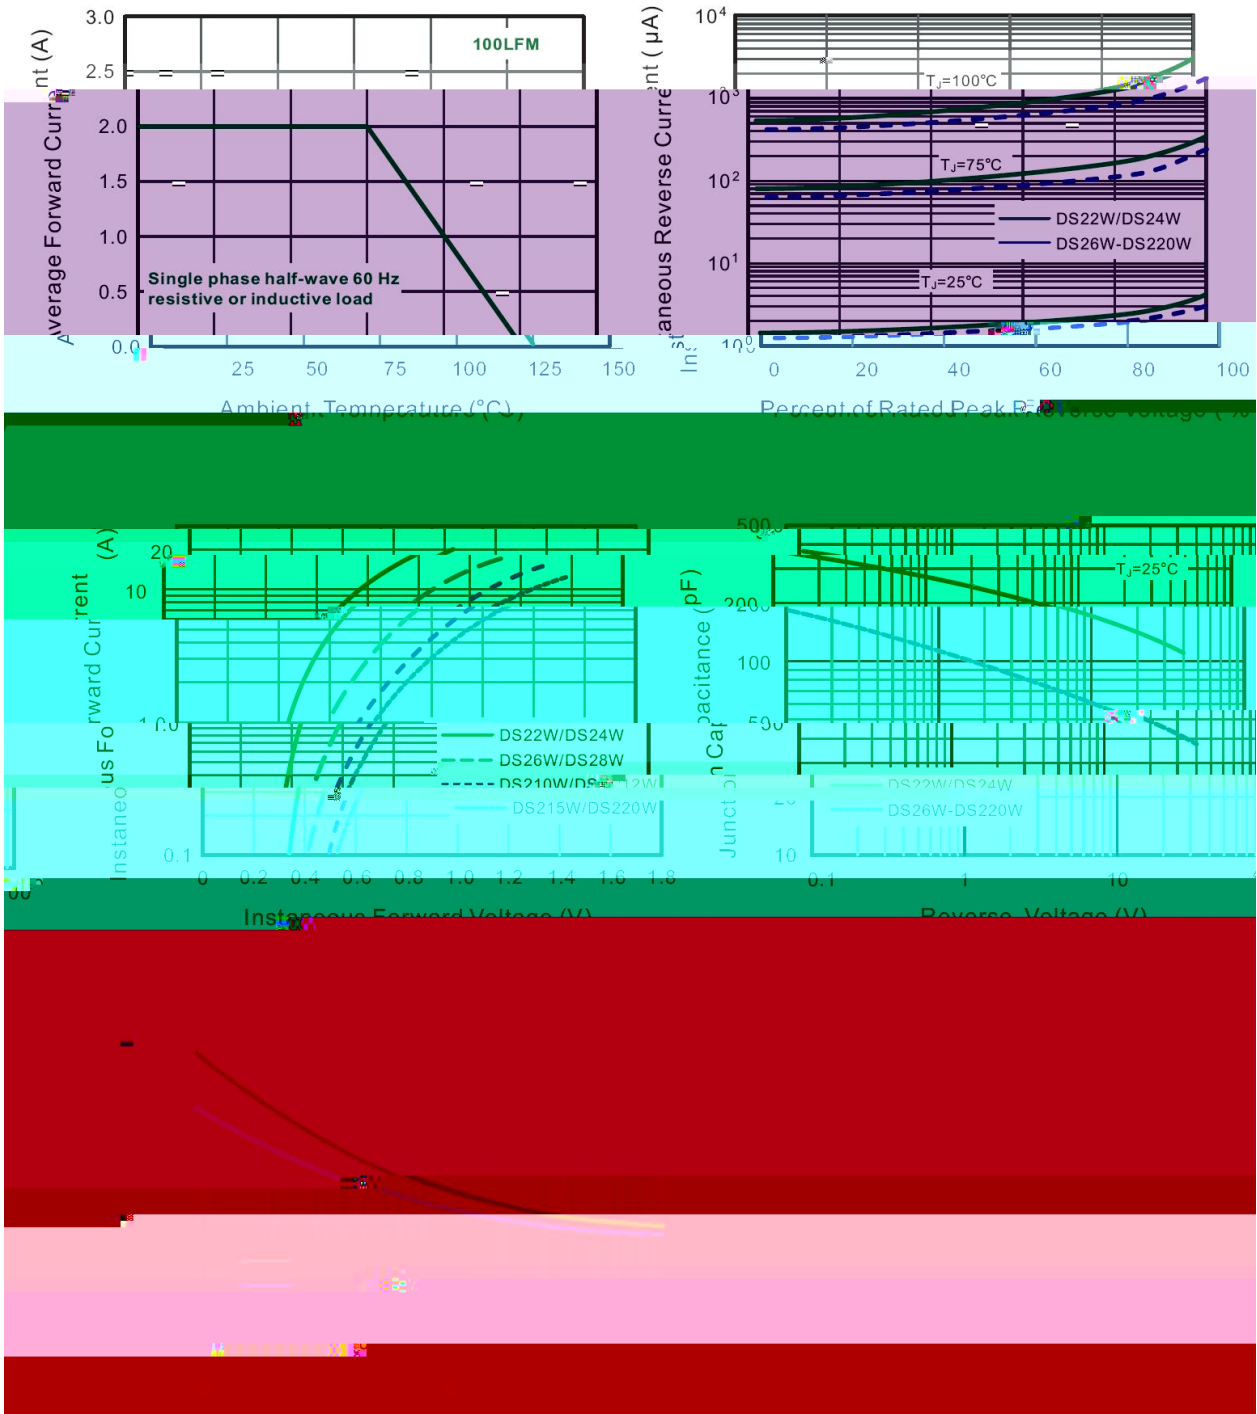

/ Package Dimensions

SOD-123FL

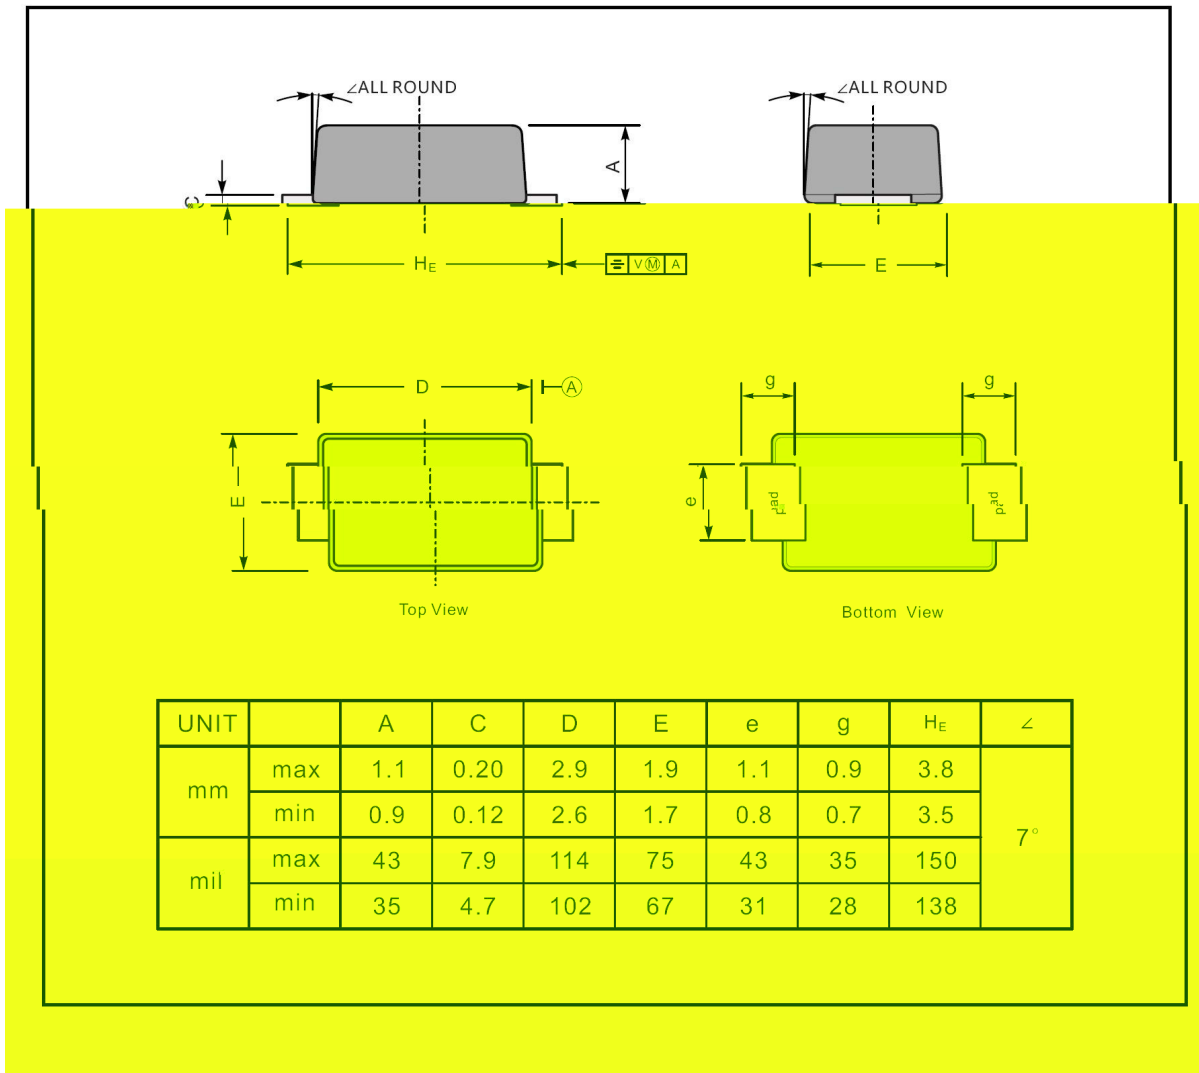


/ Marking Instructions

Marking

Type number	Marking code
DS22W	S22
DS24W	S24



/ Marking Instructions

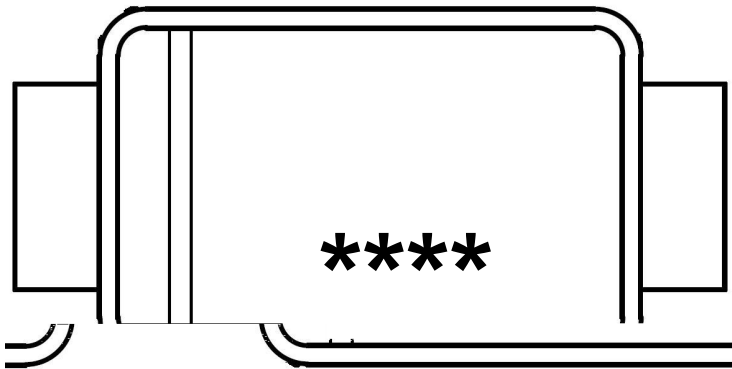

S22

1 *


3 *

S22

*

*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

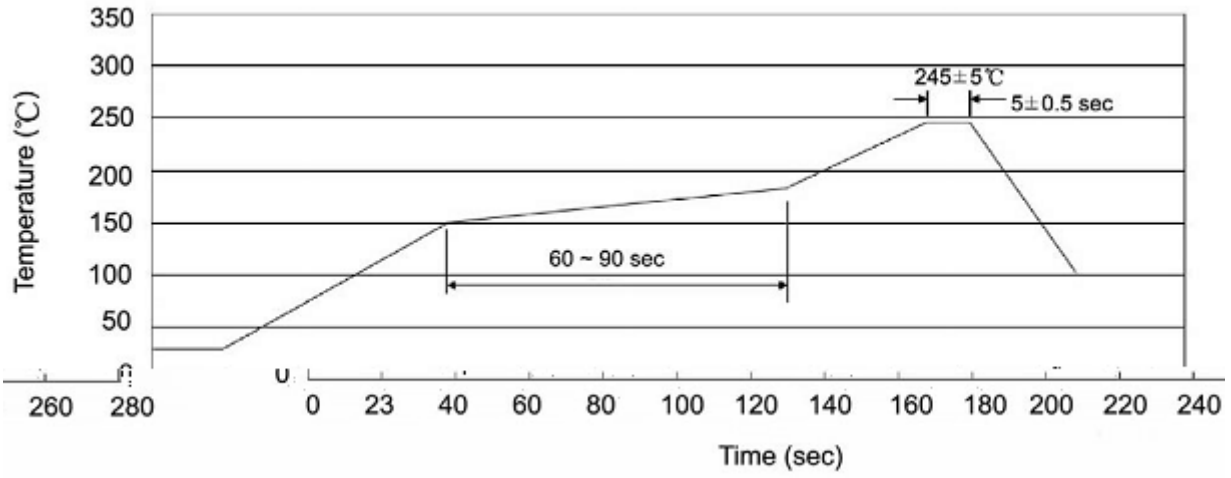

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

/ Notices