



/ Absolute Maximum Ratings(Ta=25)

	θ								

/ Electrical Characteristics(Ta=25)

				μ

/ Electrical Characteristic Curve

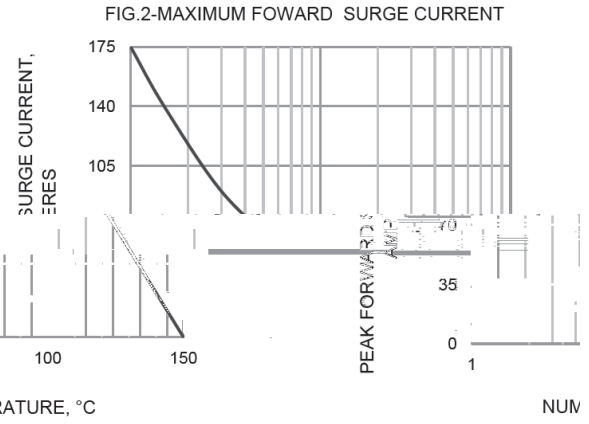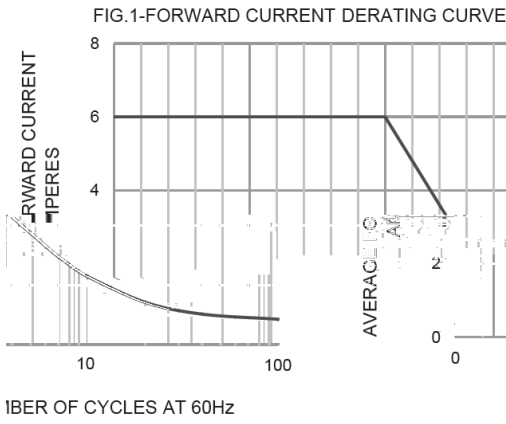

FORWARD CHARACTERISTICS





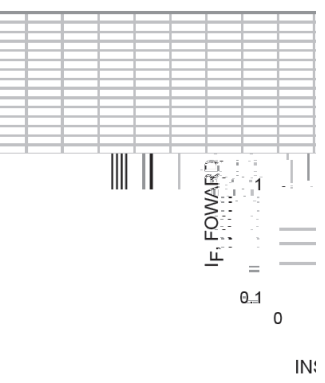


FIG.5-TYPICAL REVERSE CHARACTERIS

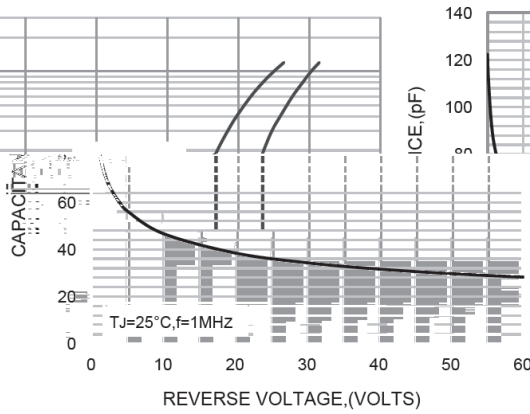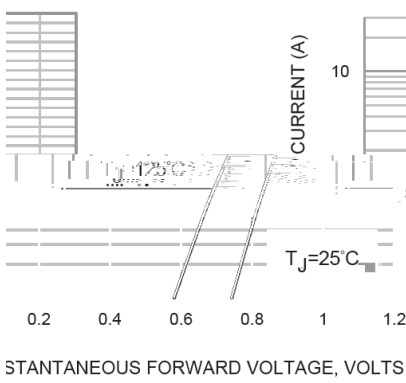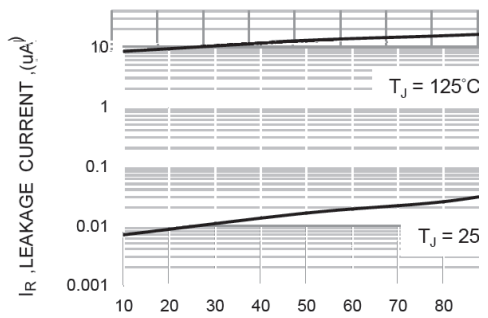


/ Package Dimensions


GBU Package Outline Dimensions

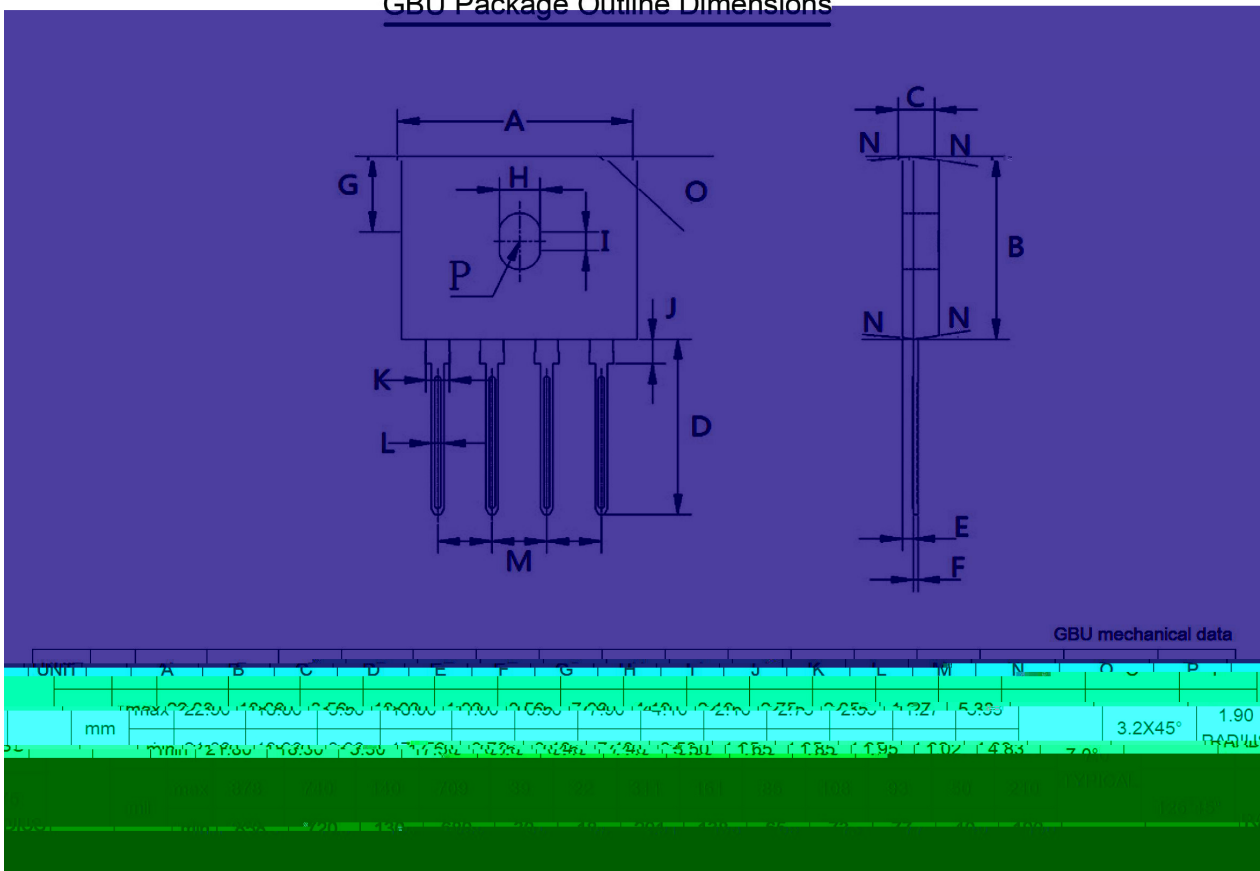

/ Marking Instructions

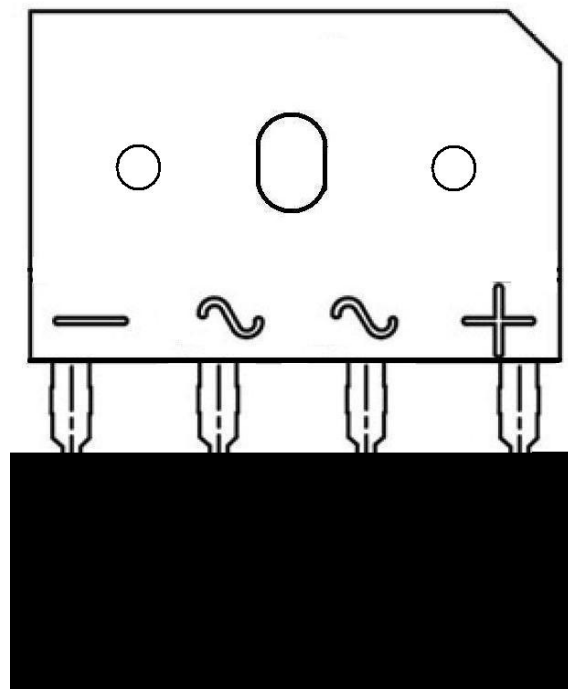

() / Temperature Profile for Dip Soldering(Pb-Free)

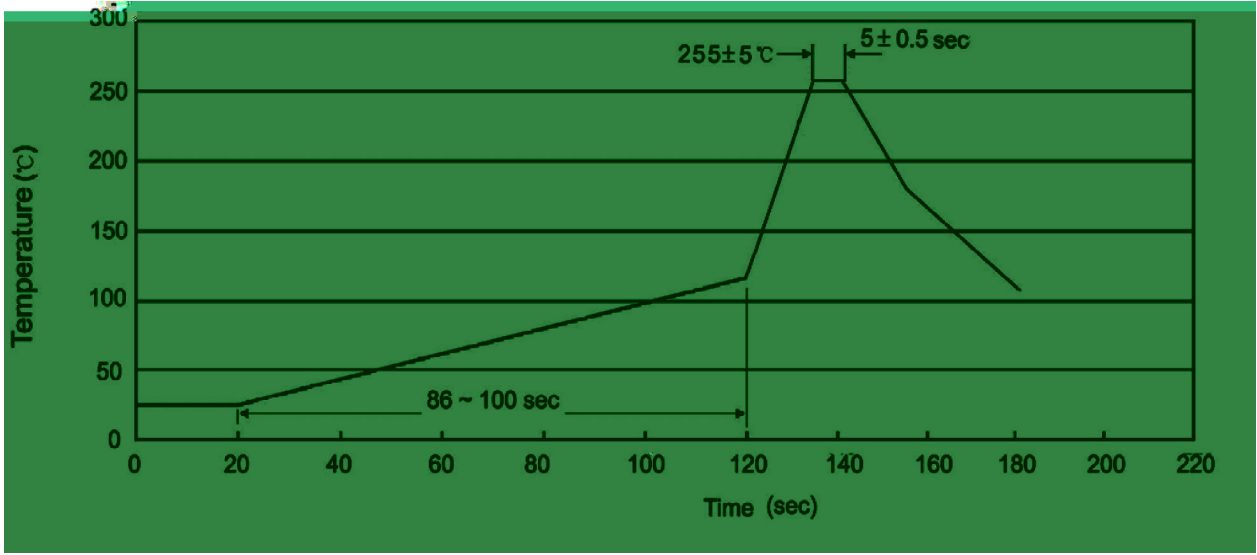

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.
