

TO-3P

OR-ing

DC-DC





FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

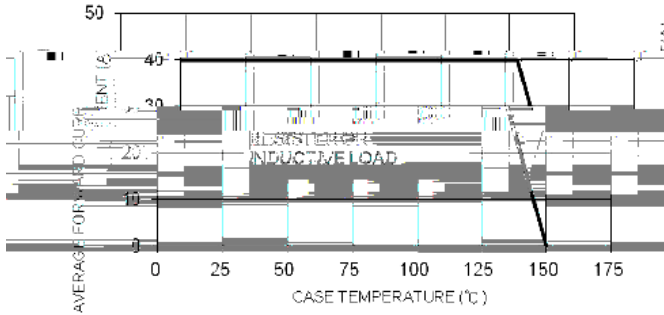


FIG.2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

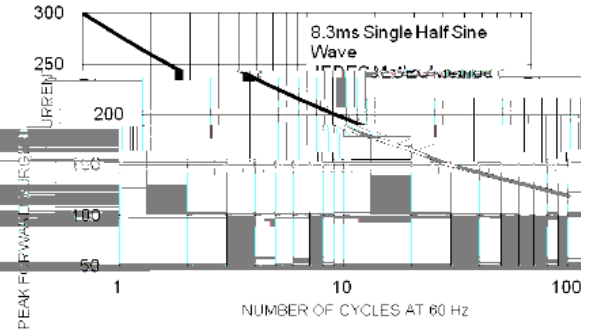


FIG.3 TYPICAL FORWARD CHARACTERISTICS PER LEG



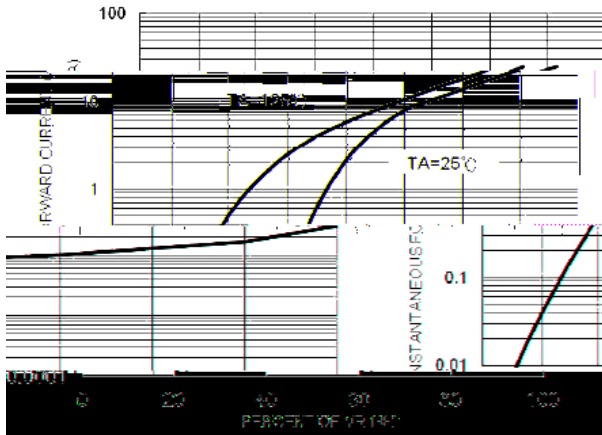



FIG.4 TYPICAL REVERSE CHARACTERISTICS PER LEG

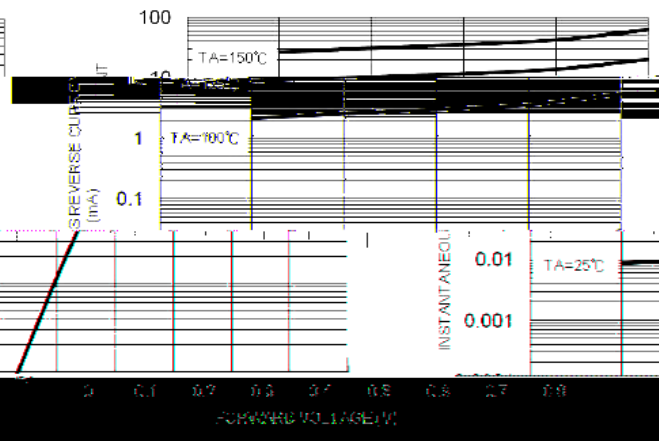

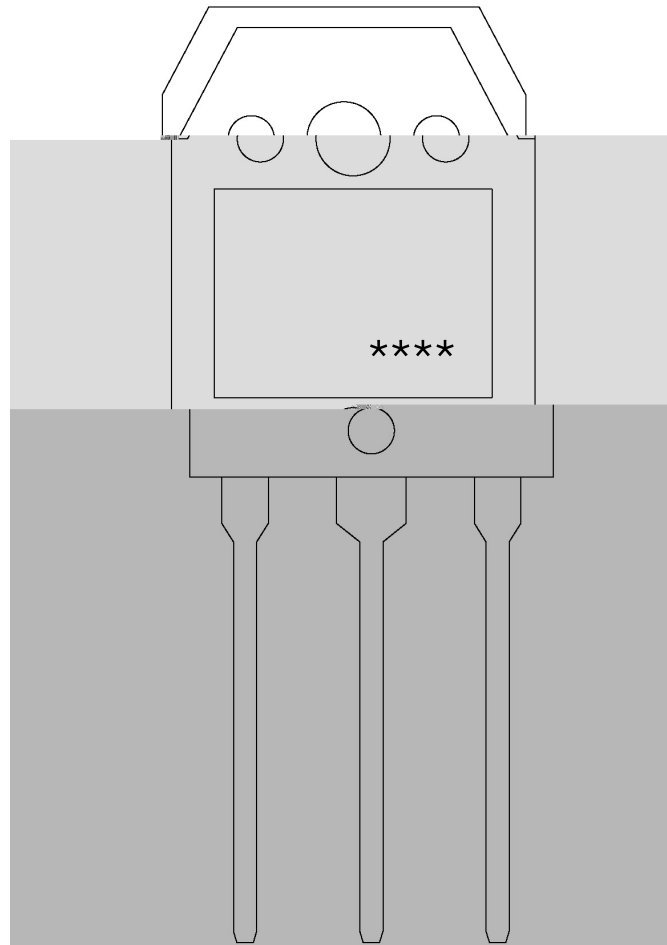

BR

LV40100PT

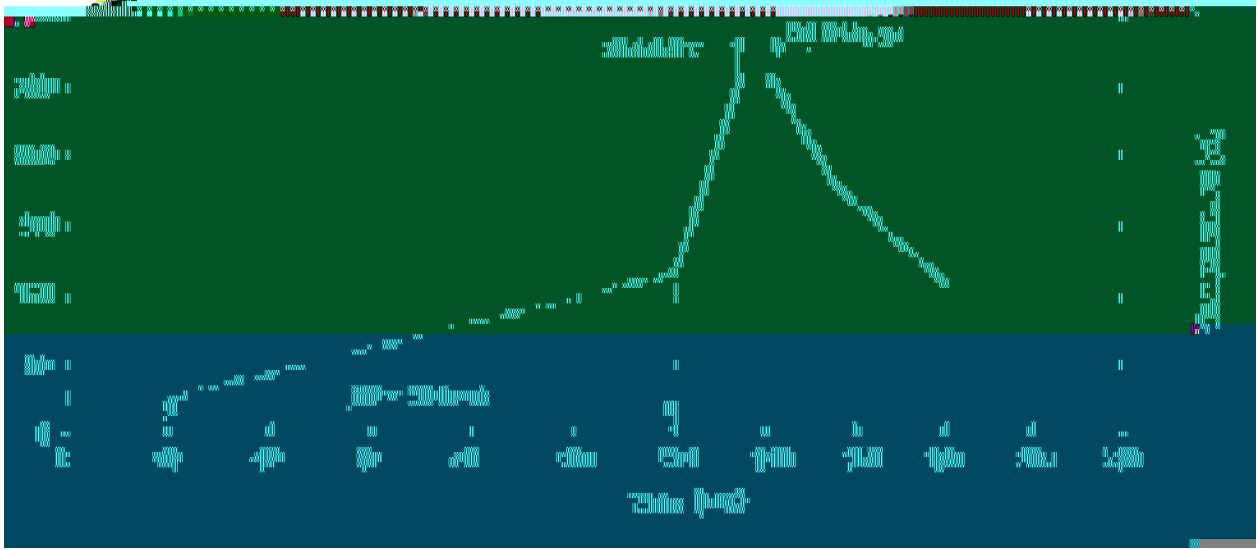

±

±

±

±

±

±

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
	/	/	/	/	/			
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180