

/ Electrical Characteristic Curve

FIG.1-FORWARD CURRENT DERATING CURVE

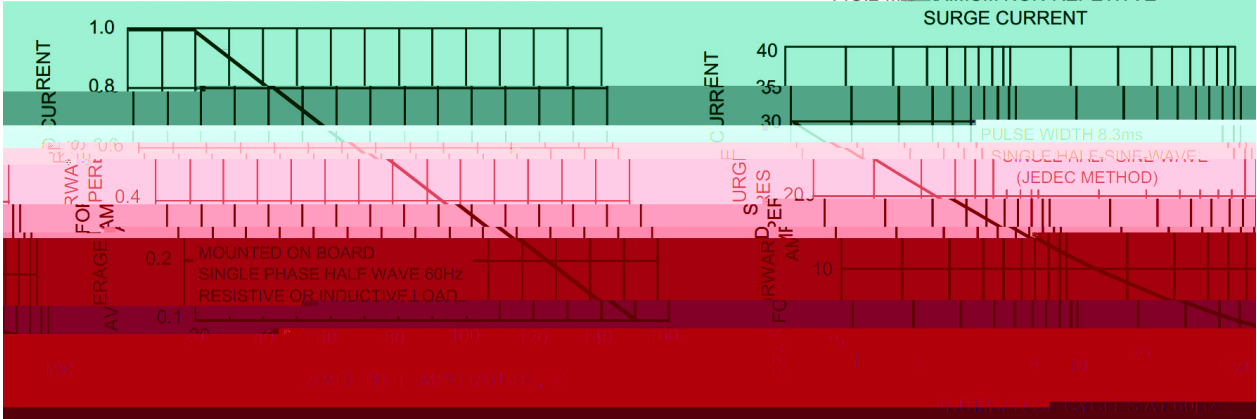


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

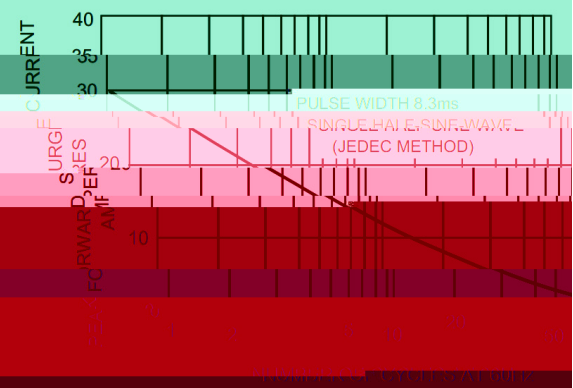


FIG.3-TYPICAL REVERSE CHARACTERISTICS


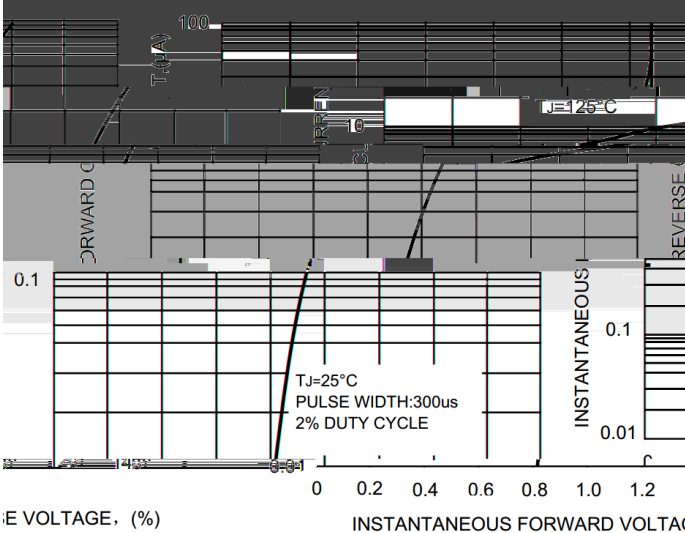


FIG.4-TYPICAL FORWARD CHARACTERISTICS

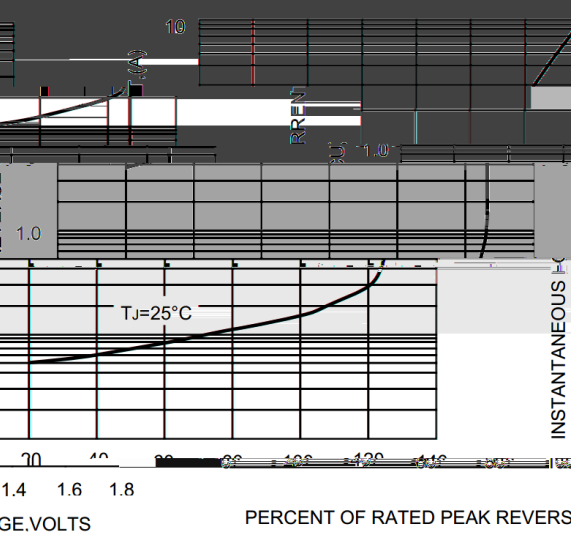


REVERSE VOLTAGE, (%)

INSTANTANEOUS FORWARD VOLTAGE,VOLTS

PERCENT OF RATED PEAK REVERS

FIG.5-TYPICAL JUNCTION CAPACITANCE

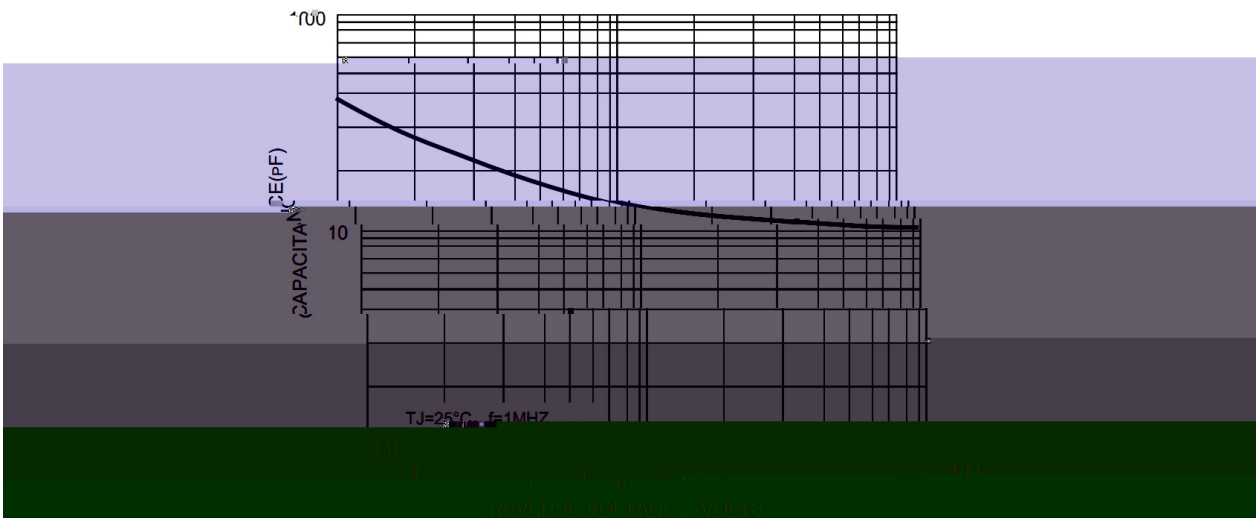


MB05F10-34~MB10F10-34



蓝箭电子
BLUE ROCKET ELECTRONICS


DATA SHEET

/ Marking Instructions

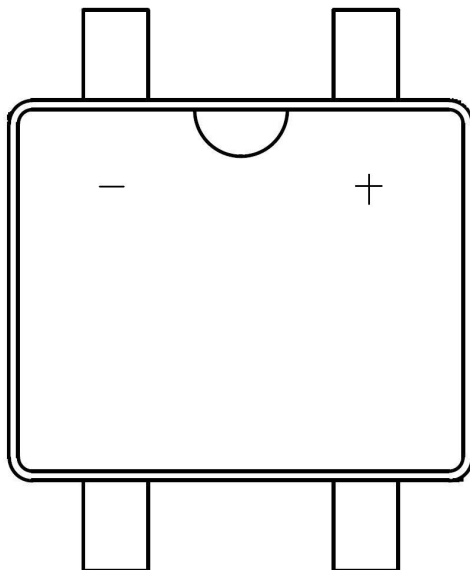

Marking

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

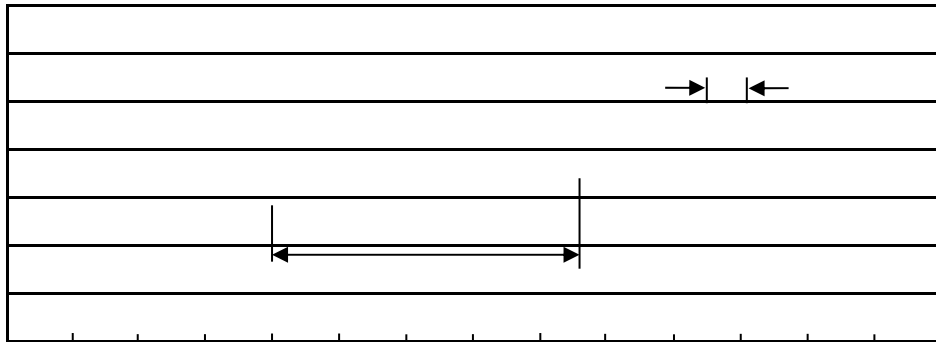

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices