

/ Descriptions

20~ 200V : 3.0A :

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

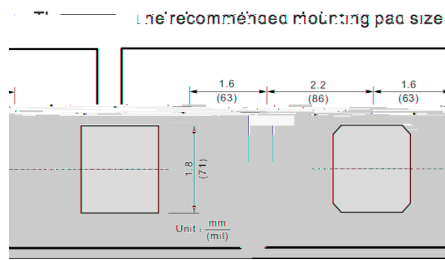


/ Marking

	()											
												℃

/ Electrical Characteristic Curve

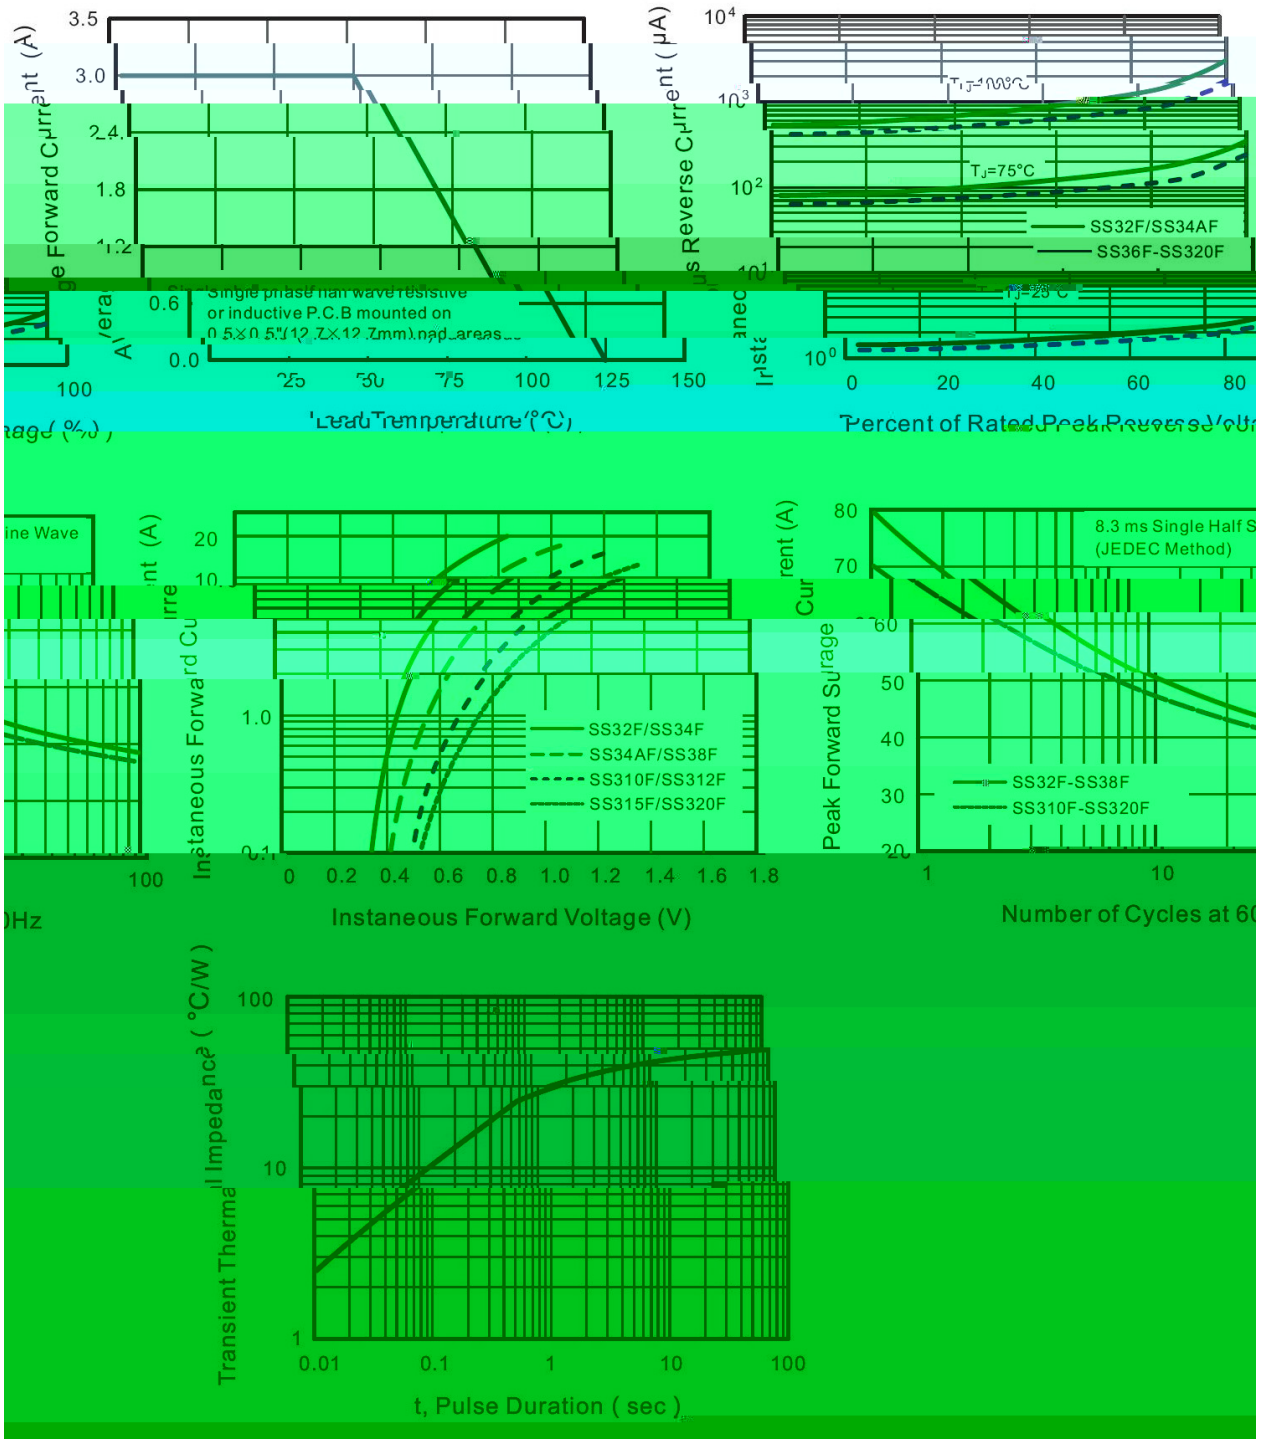

/ Package Dimensions

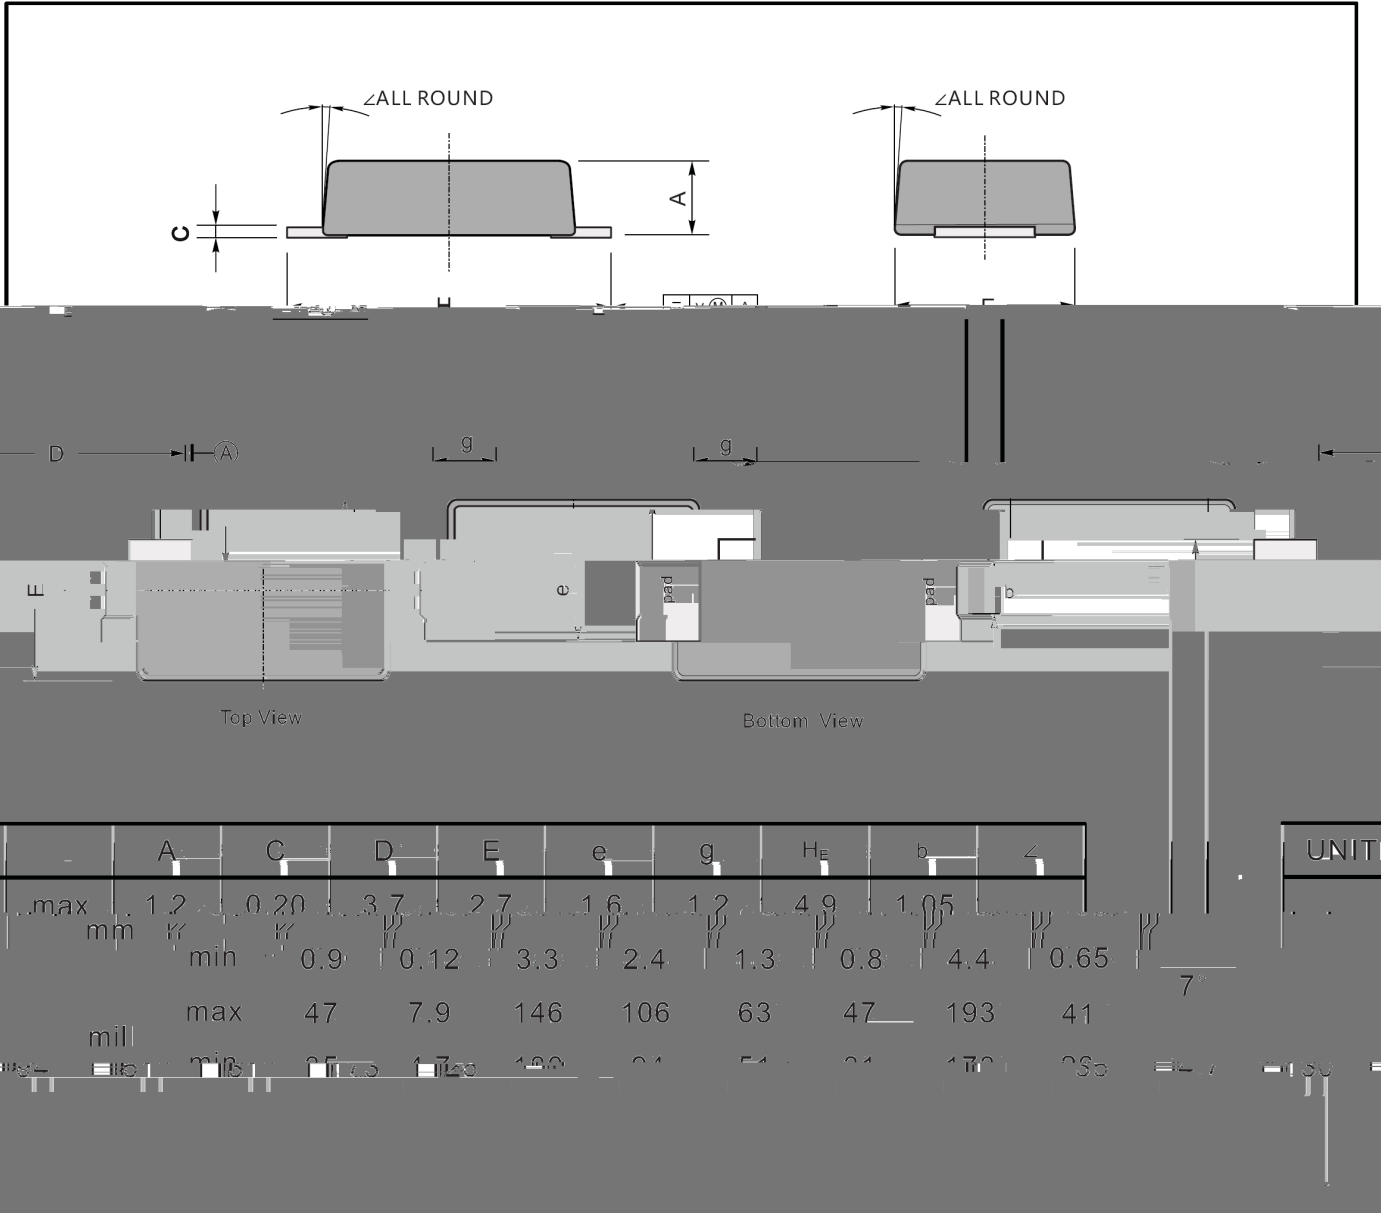

/ Marking Instructions



/ Marking Instructions



SS34

1 *


3 *

SS34

*

*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

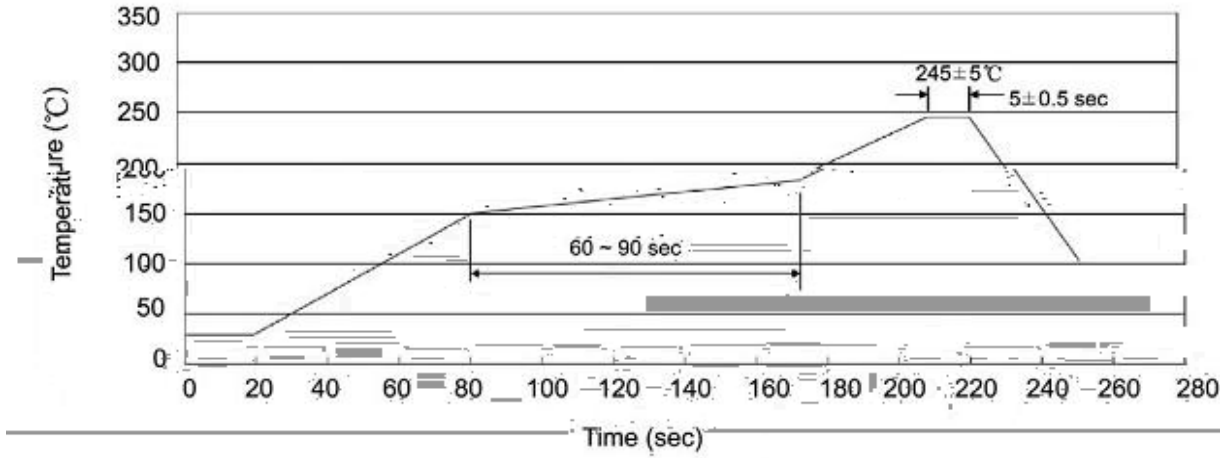

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices