

BRC07333MC

Rev.A Jul.-2022



DATA SHEET

SOT23-3

Low dropout linear regulator in a SOT23-3 Plastic Package .



20V

1.5 μ A

$\pm 2\%$

Low power consumption,Low voltage drop,Small temperature drift coefficient,High input voltage up to 20V,The static current 1.5 μ A,The output voltage accuracy: $\pm 2\%$,HF Product.

For use in power equipment,Communication equipment,Audio and video equipment.

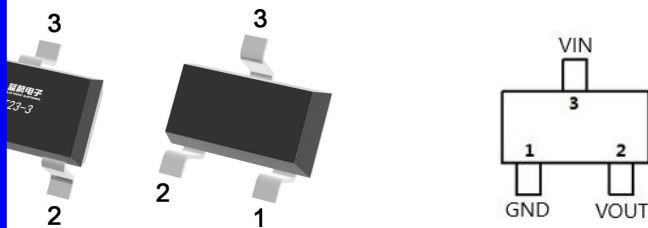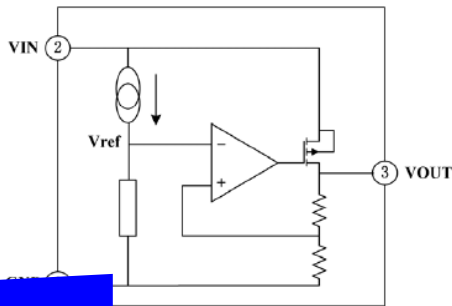



/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Working Voltage	V _{IN}	-0.3~+20	V
Thermal Resistance	R _{JA}	500	°C/W
Power Consumption	P _D	200	mW
Storage Temperature	T _{STG}	-50~+125	°C
Working Temperature	T _A	-40~+85	°C

Notes: If the device operating conditions over the maximum rating of the above-mentioned conditions, may cause permanent damage to the device. The above parameters is only part of the operating conditions the maximum, we do not recommend the device running outside the scope of this specification. If the device to work long hours under the condition of absolute maximum limit, its stability may be affected.

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
The Output Voltage	V _{OUT}	V _{IN} =5.3V, I _{OUT} =10mA	3.234	3.30	3.366	V
The Output Current	I _{OUT}	V _{IN} =5.3V	300			mA
Load Regulation	ΔV _{OUT}	V _{IN} =5.3V 1mA ≤ I _{OUT} ≤ 300mA		37	100	mV
Low Dropout	V _{DIF}	I _{OUT} =100mA, ΔV _{OUT} =2%		195	300	mV
Static Power	I _{SS}	V _{IN} =5.3V		1.5	3.0	μA
Linear Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}} / \Delta V_{IN}$	4.3 ≤ V _{IN} ≤ 20V I _{OUT} =1mA			0.2	%/V
The Input Voltage	V _{IN}				20	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_A} / V_{OUT}$	V _{IN} =5.3V, I _{OUT} =10mA -40°C ≤ T _A ≤ 85°C		100		ppm/°C

V_{IN}=5.3V


2%

V_{DIF}


Note: V_{DIF} is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN}=5.3V with a fixed load.

/ Typical Application Circuit


/ Basic Application

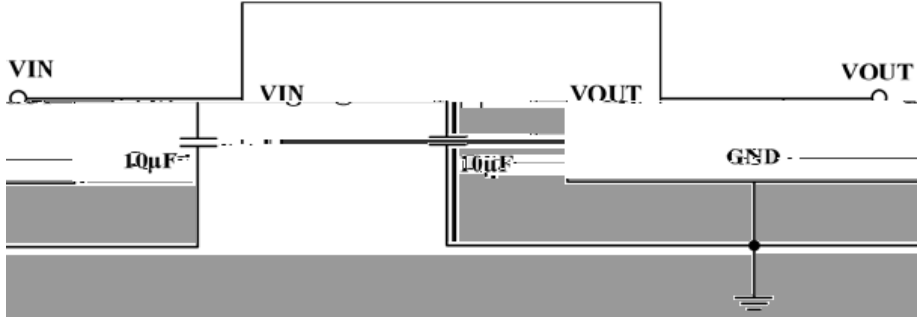

/ High Output Current Voltage Regulator

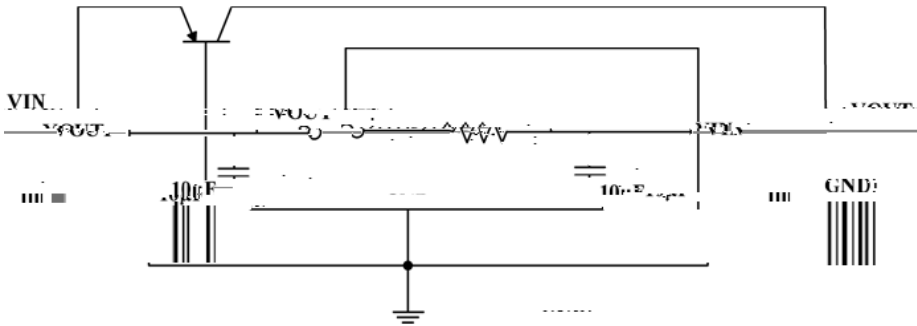


/ Short-Circuit Protection

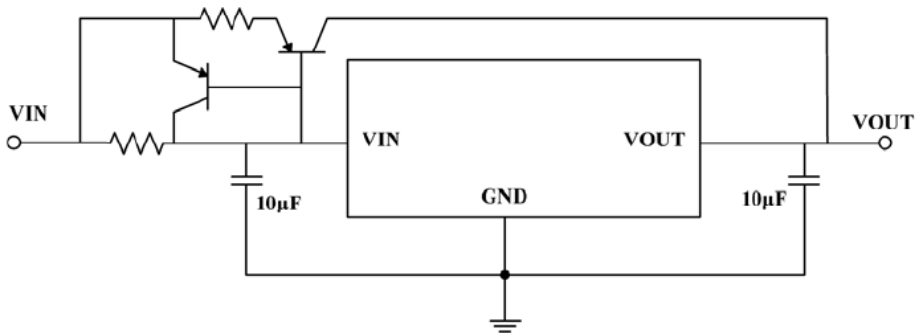


/ Typical Application Circuit


/ Circuit for Increasing Output Voltage

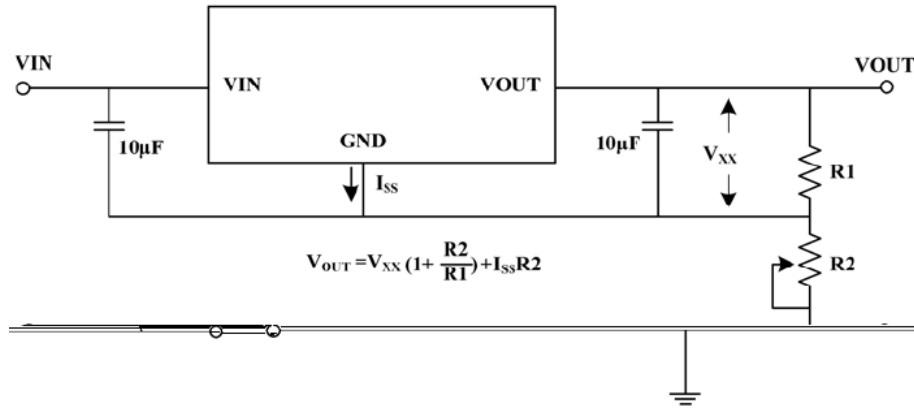


/ Constant Current Regulator

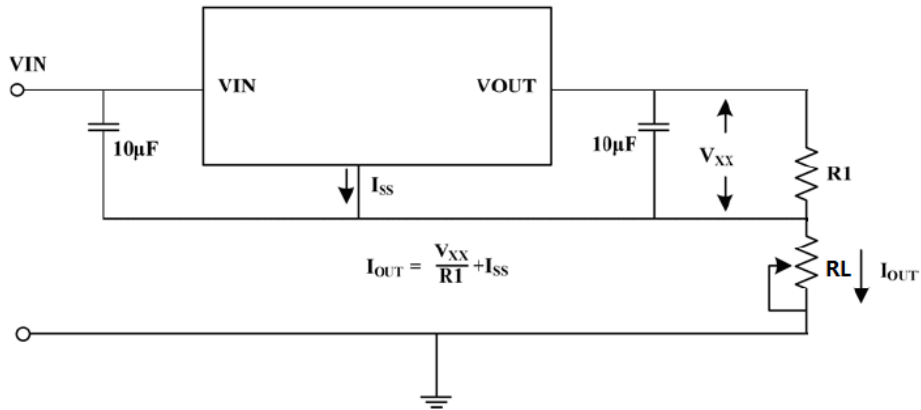

/ Double Output Circuit

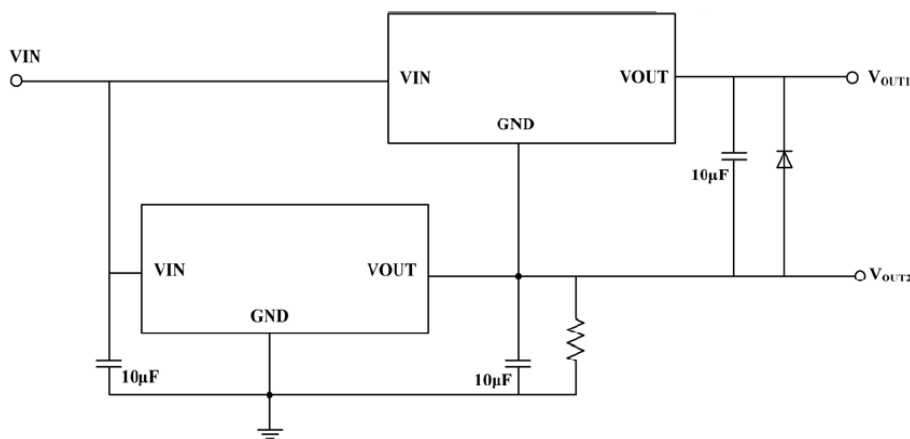

/ Package Dimensions

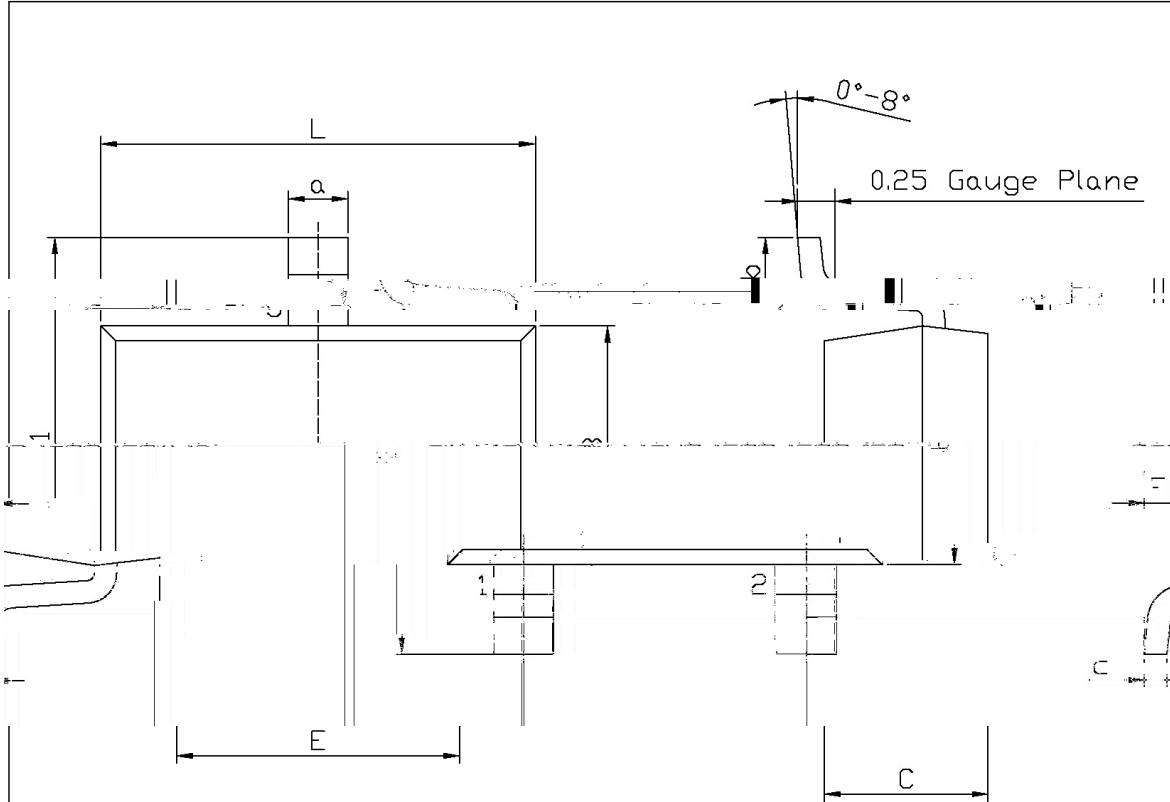


Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max

0.50			0.25		
------	--	--	------	--	--




/ Marking Instructions

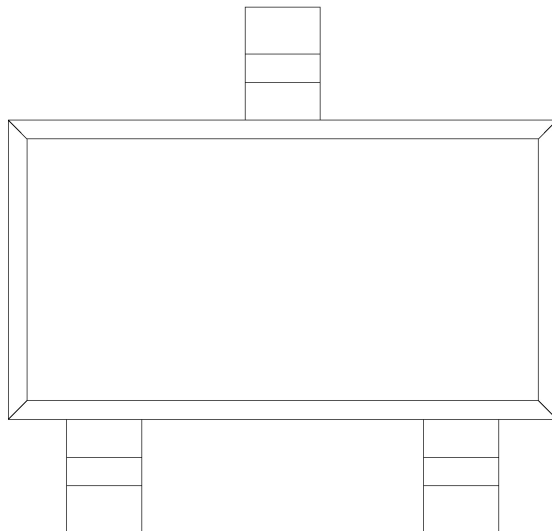



() /

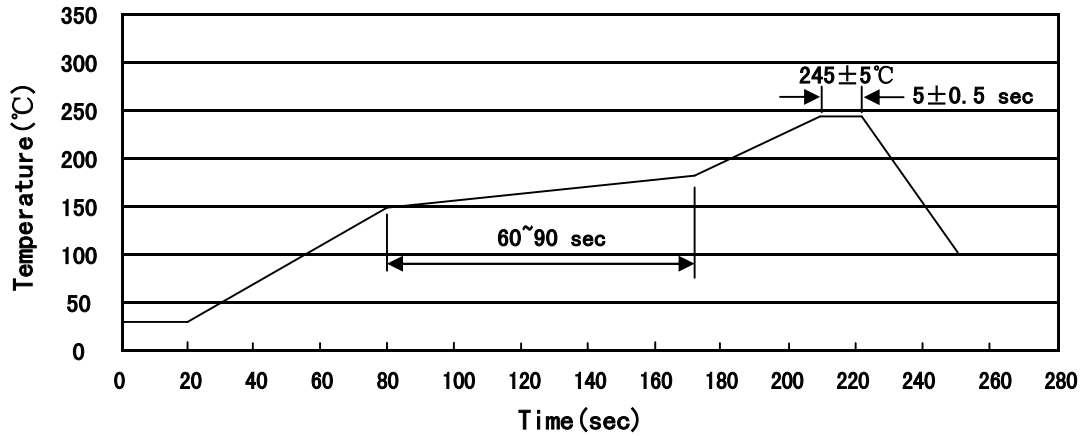

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT23-3	3,000	10	30,000	4	120,000	7" × 8	210×205×205	445×230×435

/ Notices